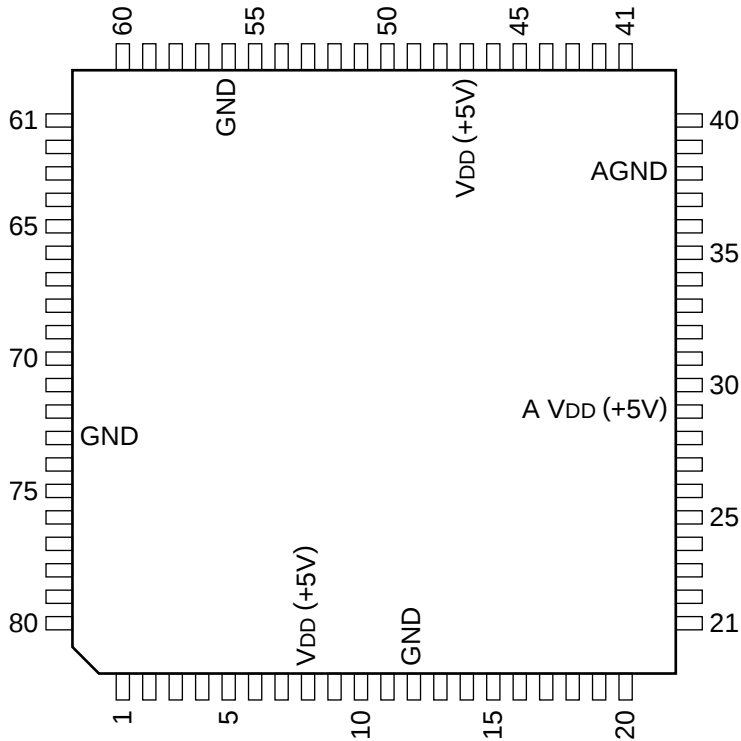

C-MOS 8-BIT SIGNAL CHIP MICROCOMPUTER

-TOP VIEW-



(VDD = +5V)

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	RES	21	I/O	P60/KEYIN0/FTCI	41	I/O	P42/TMRI0	61	I/O	P13/A3
2	I	XTAL	22	I/O	P61/KEYIN1/FTOA	42	I/O	P43/TMCI1/HIRQ11	62	I/O	P12/A2
3	I	EXTAL	23	I/O	P62/KEYIN2/FTIA	43	I/O	P44/TMO1/HIRQ1	63	I/O	P11/A1
4	I	MD1	24	I/O	P63/KEYIN3/FTIB	44	I/O	P45/TMRI1/HIRQ12	64	I/O	P10/A0
5	I	MD0	25	I/O	P64/KEYIN4/FTIC	45	I/O	P46/PW0	65	I/O	P30/HDB0/D0
6	I	NMI	26	I/O	P65/KEYIN5/FTID	46	I/O	P47/PW1	66	I/O	P31/HDB1/D1
7	I	STBY/FVPP	27	I/O	P66/FTOB/KEYIN6/IRQ6	47	—	VDD	67	I/O	P32/HDB2/D2
8	—	VDD	28	I/O	P67/KEYIN7/IRQ7	48	I/O	P27/A15	68	I/O	P33/HDB3/D3
9	I/O	P52/SCK0	29	—	AVDD	49	I/O	P26/A14	69	I/O	P34/HDB4/D4
10	I/O	P51/RXD0	30	I/O	P70/AN0	50	I/O	P25/A13	70	I/O	P35/HDB5/D5
11	I/O	P50/TXD0	31	I/O	P71/AN1	51	I/O	P24/A12	71	I/O	P36/HDB6/D6
12	—	GND	32	I	P72/AN2	52	I/O	P23/A11	72	I/O	P37/HDB7/D7
13	I/O	P97/WAIT/SDA	33	I	P73/AN3	53	I/O	P22/A10	73	—	GND
14	I/O	P96/Ø	34	I	P74/AN4	54	I/O	P21/A9	74	I/O	P80/HA0
15	I/O	P95/AS	35	I	P75/AN5	55	I/O	P20/A8	75	I/O	P81/GA20
16	I/O	P94/WR	36	I	P76/AN6/DA0	56	—	GND	76	I/O	P82/CS1
17	I/O	P93/RD	37	I	P77/AN7/DA1	57	I/O	P17/A7	77	I/O	P83/IOR
18	I/O	P92/IRQ0	38	—	AGND	58	I/O	P16/A6	78	I/O	P84/TXD1/IRQ3/IOW
19	I/O	P91/IRQ1/EIOW	39	I/O	P40/TMCI0	59	I/O	P15/A5	79	I/O	P85/RXD1/IRQ4/CS2
20	I/O	P90/ADTRG/IRQ2/ECS2	40	I/O	P41/TMO0	60	I/O	P14/A4	80	I/O	P86/SCK1/IRQ5/SCL

