


C-MOS 8-BIT × 12-CHANNEL D/A CONVERTER (WITH BUFFER OPERATIONAL AMPLIFIER)

—TOP VIEW—



AO1 - AO12 : 8-BIT D/A OUTPUTS
 CK : CLOCK INPUT
 DI : SERIAL DATA INPUT
 DO : DATA OUTPUT

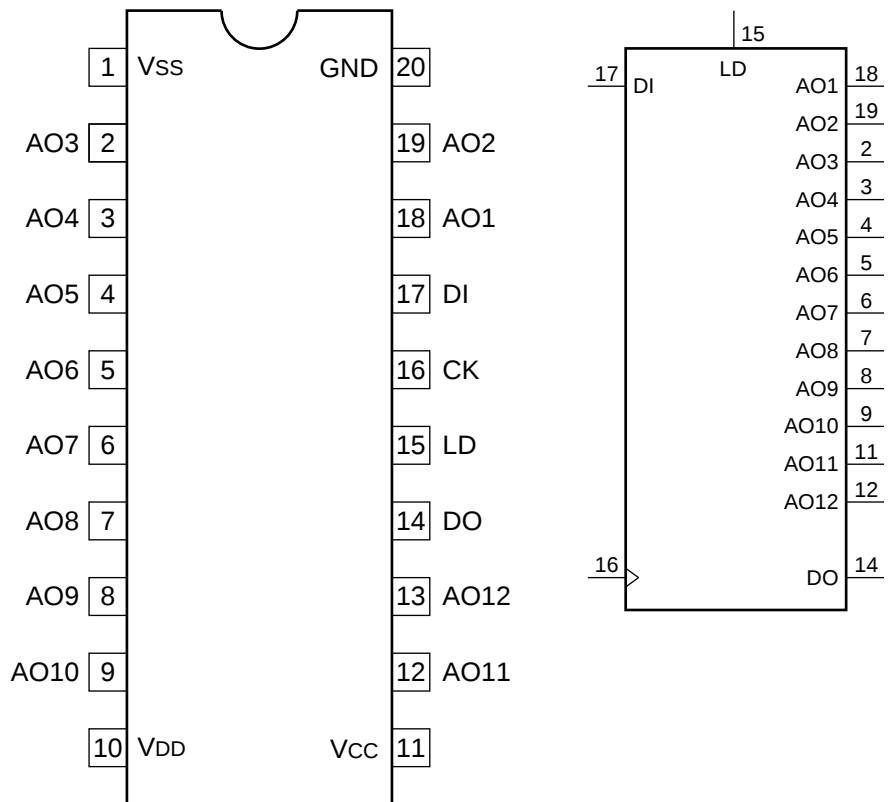