

SANYO

No.2404

LA7301, 7301M

Monolithic Linear IC

VHS VTR PLAYBACK HEAD AMP, RECORDING AMP

Functions

- . 4-channel playback head amp
- . 2-channel recording amp
- . PB: 2 head select switches, 4 mode select switches
- . REC: 4 head select switches, 2 mode select switches
- . Comparator for special playback

Features

- . No more than one IC required for 4-head use
- . On-chip comparator permitting GT-4-head use
- . On-chip driver transistor permitting direct recording
- . On-chip head select switches (4 types) facilitating the pattern design of a set


Maximum Ratings at Ta=25°C

			unit
Maximum Supply Voltage	$V_{CC \text{ max}}$	(PB) 7.0	V
		(REC) 13.5	V
Allowable Power Dissipation	$P_d \text{ max}$	(DIP) 920	mW
		(MFP) 840	mW
Operating Temperature	T_{opg}	-10 to +65	°C
Storage Temperature	T_{stg}	-40 to +125	°C


Operating Conditions at Ta=25°C

			unit
Supply Voltage	V_{CC}	(PB) 5.0	V
		(REC) 12.0	V
Operating Voltage Range	$V_{CC \text{ opg}}$	(PB) 4.75 to 5.6	V
		(REC) 8.5 to 13.0	V

Case Outline 3061-D30SNIC
(unit:mm) [LA7301]

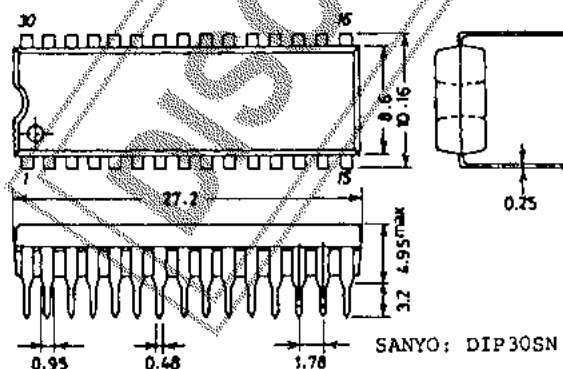

Case Outline 3073A-M30SIC
(unit:mm) [LA7301M]

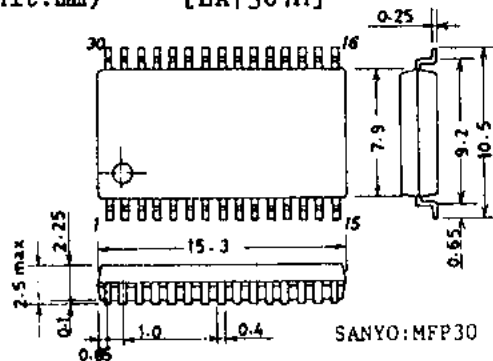

These specifications are subject to change without notice.

SANYO ELECTRIC CO., LTD. SEMICONDUCTOR DIVISION
15-13, 8-CHOME, SOTOKANDA, CHIYODA-KU, TOKYO 101 JAPAN

4027TA, TS No.2404-1/4

Electrical Characteristics at Ta=25°C

Characteristic	Symbol	Test Conditions		Limits					unit				
		Input	Output	SW1	SW2	SW3	SW4	SW5					
(PB mode) CH		T1		PB+5V	RF	HA	6H/2H	REC	Special PB "H"	min	typ	max	
Current Dissipation	I_{CCP}			Pin1 flow-in current	1	1	1		1	22.5	30	37.5	mA
Voltage Gain	CH1 $G_{VP}(1)$	T27	T6	$V_i=38mV_{pp}$ $f=1MHz$	1	1	1		2	56.5	59.5	62.5	dB
	2 (2)	T25	T6		2	1	1		2				
	3 (3)	T21	T6		1	2	2		2	54.0	57.0	60.0	dB
	4 (4)	T20	T6		2	2	2		2				
Voltage Gain Difference 1	$\Delta G_{VP}(1)$			$G_{VP}(1)-G_{VP}(2)$						-1.0	0	1.0	dB
Voltage Gain Difference 2	$\Delta G_{VP}(2)$			$G_{VP}(3)-G_{VP}(4)$						-1.0	0	1.0	dB
Gain Difference between Modes	$\Delta G_{VP6H-2H}$			$G_{VP}(1)-G_{VP}(3)$						1.8	2.5	3.2	dB
Equivalent Input Noise Voltage	1 $V_{NIN}(1)$		T6	V_{OUT}	1	1	1		2				
	2 (2)		T6	$G_{VP}(1),(2),(3),(4)$	2	1	1		2		1.1	1.5	μV_{rms}
	3 (3)		T6	after 1.1MHz L.P.F	1	2	2		2				
	4 (4)		T6		2	2	2		2				
Frequency Characteristic	1 $\Delta V_{FP}(1)$	T27	T6	$V_i=38mV_{pp}$	1	1	1		2				
	2 (2)	T25	T6	$f=100kHz, 7MHz$	2	1	1		2				
	3 (3)	T21	T6	7M	1	2	2		2	-2.5	0		dB
	4 (4)	T20	T6	100k output ratio	2	2	2		2				
Second Harmonic Distortion	1 $V_{HDP}(1)$	T27	T6	$V_i=38mV_{pp}$	1	1	1		2				
	2 (2)	T25	T6	$f=4MHz$	2	1	1		2		-40	-35	dB
	3 (3)	T21	T6	8M	1	2	2		2				
	4 (4)	T20	T6	4M output ratio	2	2	2		2				
Maximum Output Level	1 $V_{OMP}(1)$	T27	T6	$f=1MHz$	1	1	1		2				
	2 (2)	T25	T6	Output level when	2	1	1		2	0.8	1.0		Vpp
	3 (3)	T21	T6	3rd harmonic distortion is 30dB	1	2	2		2				
	4 (4)	T20	T6		2	2	2		2				
Crosstalk 1 6H	1 $V_{CR1}(1)$	T25	T6	$V_i=38mV_{pp}$	1	1	1		2				
	2 (2)	T27	T6	$f=1MHz$ $V_{OUT}/G_{VP}(1),(2)$ output ratio	2	1	1		2		-40	-35	dB
Crosstalk 2 2H	3 $V_{CR2}(3)$	T20	T6	$V_i=38mV_{pp}$	1	2	2		2				
	4 (4)	T21	T6	$f=1MHz$ $V_{OUT}/G_{VP}(3),(4)$ output ratio	2	2	2		2		-40	-35	dB
Output DC Offset 1 to 6	1 ΔV_{ODC1}		Pin6	CH1-2 Output DC	1-2	1			1				
	2			CH3-4 difference	1-2	2			1				
	3			CH1-3	1	1-2			1	-100	0	100	mV
	4			CH2-4	2	1-2			1				
	5			CH1-4	1-2	1-2			1				
	6			CH2-3	2-1	1-2			1				
Comparator Control Characteristic	1 V_{CM1}		T5	Vary T5 potential and measure T5 DC when T2 output changes as L-R.	1	1			1	2.6	2.8	3.0	V
	2 V_{CM2}	T27	T5	Same as above after setting as $f=4MHz$ T6 output 200mVpp	1	1			1	3.4	3.6	3.8	V

Continued on next page.

Continued from preceding page.

Characteristic	Symbol	Input	Output	Test Conditions	SW1	SW2	SW3	SW4	SW5	Limits			unit
(REC mode)		T14		REC+12V	RF	HA	6H/ 2H	REC MUTE	Special PB "R"	min	typ	max	
Current Dissipation	I_{CCB}	T14		Pin14 flow-in current			1	2		37	50	63	mA
Voltage Gain	$G_{VR}(6C)$	T8	T17	$v_i=0.4V_{pp}$			1	2					
6H	$G_{VR}(6Y)$	T9	T17	$f=1MHz$			1	2					
2H	$G_{VR}(2C)$	T8	T15				2	2		16.0	19.0	22.0	dB
	$G_{VR}(2Y)$	T9	T15				2	2					
Voltage Gain Difference 1	$\Delta G_{VR}(6H)$	-	-	$G_{VR}(6C)-(6Y)$						-1.0	0	1.0	dB
Voltage Gain Difference 2	$\Delta G_{VR}(2H)$	-	-	$G_{VR}(2C)-(2Y)$						-1.0	0	1.0	dB
Frequency Characteristic	$\Delta V_{FR}(6C)$	T8	T17	$v_i=0.4V_{pp}$			1	2					
	$\Delta V_{FR}(6Y)$	T9	T17	$f=1MHz, 7MHz$			1	2					
	$\Delta V_{FR}(2C)$	T8	T15	$\frac{7M}{1M}$ output ratio			2	2		-4.5	-2.8	0	dB
	$\Delta V_{FR}(2Y)$	T9	T15				2	2					
Second Harmonic Distortion	$V_{HDR}(6C)$	T8	T17	$v_i=0.4V_{pp}$			1	2					
	$V_{HDR}(6Y)$	T9	T17	$f=4MHz$			1	2					
	$V_{HDR}(2C)$	T8	T15	$\frac{8M}{4M}$ output ratio			2	2		-50	-40		dB
	$V_{HDR}(2Y)$	T9	T15				2	2					
Maximum Output Level	$V_{OHR}(6C)$	T8	T17	$f=1MHz$			1	2					
	$V_{OHR}(6Y)$	T9	T17	Output level when			1	2		5.0	5.7		V _{PP}
	$V_{OHR}(2C)$	T8	T15	3rd harmonic distortion is -30dB			2	2					
	$V_{OHR}(2Y)$	T9	T15				2	2					
Mute Attenuation	$V_{MR}(6C)$	T8	T17	$v_i=0.4V_{pp}$			1	1					
	$V_{MR}(6Y)$	T9	T17	$f=1MHz$			1	1					
	$V_{MR}(2C)$	T8	T15	V_{out} output ratio			2	1		-60	-50		dB
	$V_{MR}(2Y)$	T9	T15				2	1					
Cross Modulation Relative Level	6H $V_{CY}(6H)$	T8	T17	$T8 \quad v_i=55mV_{pp}$			1	2		-50	-40		dB
		T9	T17	$f=630kHz$									
	2H $V_{CY}(2H)$	T8	T15	$T9 \quad v_i=0.4V_{pp}$									
		T9	T15	$f=4MHz$			2	2		-50	-40		dB
				$\frac{4 \pm 0.63M}{4MHz}$ output ratio									

The application circuit diagrams and circuit constants herein are included as an example and provide no guarantee for designing equipment to be mass-produced.

The information herein is believed to be accurate and reliable. However, no responsibility is assumed by SANYO for its use, nor for any infringements of patents or other rights of third parties which may result from its use.