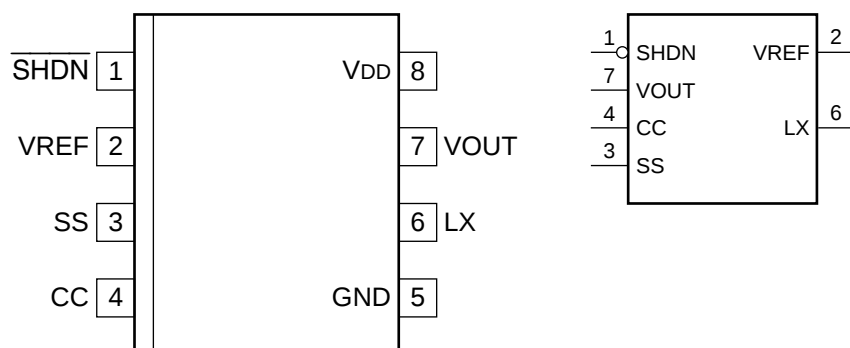


C-MOS PROGRAMING POWER SUPPLY FOR FLASH MEMORY

—TOP VIEW—

**INPUT**

CC : COMPENSATION CAPACITOR
 SHDN : SHUTDOWN (SHUTDOWN : GND NORMAL : V_{DD})
 SS : SOFT START
 VREF : REFERENCE VOLTAGE OUTPUT (+1.23 V)

OUTPUT

LX : INTERNAL N-CHANNEL POWER-MOSFET DRAIN
 VOUT : OUTPUT VOLTAGE DETECTION INPUT FOR REGULATION FEEDBACK DETECTION

