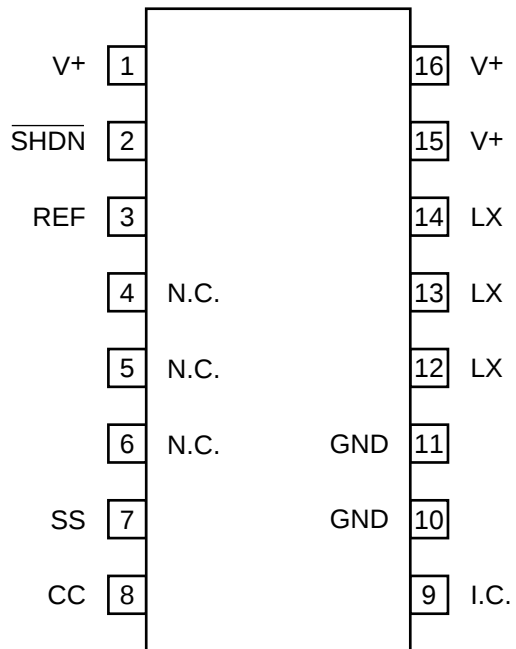

C-MOS ADJUSTABLE,STEP-DOWN,CURRENT-MODE DC-DC CONVERTER -TOP VIEW-



SHDN : SHUT DOWN CONTROL INPUT,ACTIVE LOW
 REF : REFERENCE VOLTAGE OUTPUT
 SS : SOFT-START TIMING CAPACITOR CONNECTION
 CC : FEEDBACK INPUT
 I.C. : INTERNAL CONNECTION
 LX : SWITCHING NODE(INDUCTOR)CONNECTION
 V+ : BATTERY VOLTAGE INPUT

