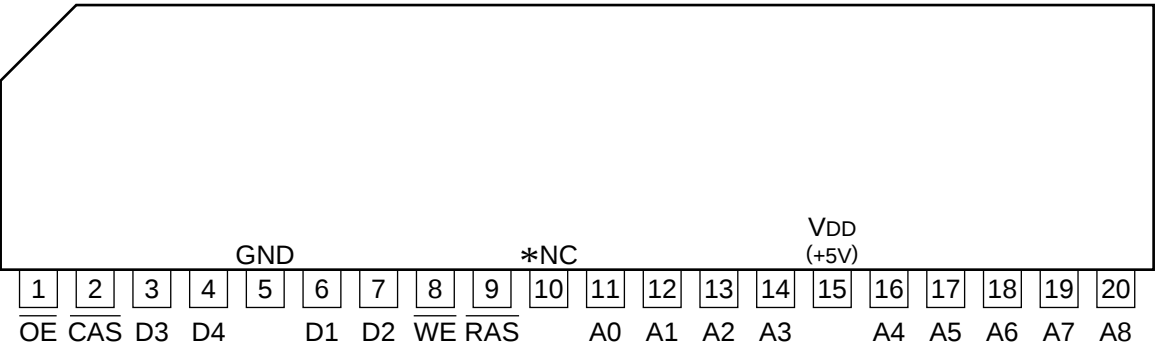
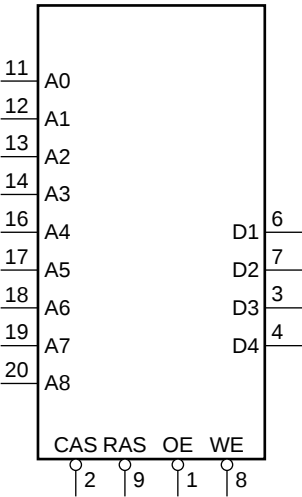

C-MOS 1M (262, 144 X 4)-BIT DYNAMIC RAM
-SIDE VIEW-



*NOTE ; PIN 10 OF MSM514256B/BL SERIES
IS NO LEAD.



A0 - A8 ; ADDRESS INPUT
CAS ; COLUMN ADDRESS STROBE
D1 - D4 ; DATA INPUTS/OUTPUTS
OE ; OUTPUT ENABLE
RAS ; ROW ADDRESS STROBE
WE ; WRITE ENABLE

