



200MHz Voltage Controlled Multivibrator

- High Frequency VCM Ideal for PLL Applications
- Single External Resistor Determines Center Frequency; Additional Resistor Determines f/V Sensitivity
- Internal Ripple Counter (1/2, 1/4, 1/8) For Low Frequency Applications – TTL/ECL Outputs
- VCO Output Enable Pins (TTL/ECL Level)
- +5.0V Single Supply Voltage
- Packages: DIP, PLCC

Pinout: 20-Lead Plastic Package (Top View)

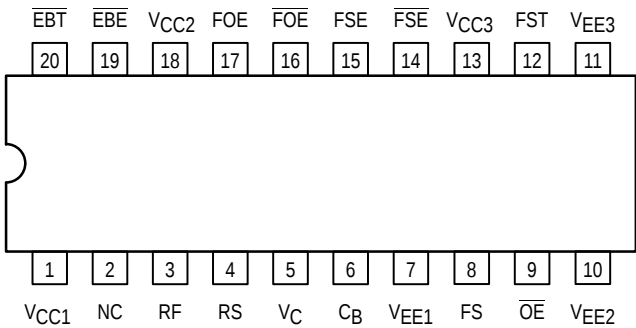


Pinout: 20-Lead PLCC Package (Top View)

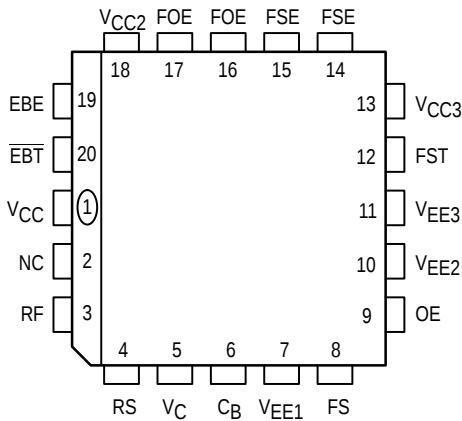


MC12100

200MHz VOLTAGE CONTROLLED MULTIVIBRATOR



P SUFFIX
PLASTIC DIP PACKAGE
CASE 738-03



FN SUFFIX
PLCC PACKAGE
CASE 775-02

PIN NAMES

Pin	Function
RF, RS	Center Frequency Inputs
VC	Frequency Control Input
CB	Bias Filter Input
FS	Frequency Select Input
OE	TTL Output Enable
FST	TTL +2, +4, +8 Output
FSE, FSE	Diff ECL +2, +4, +8 Outputs
FOE, FOE	Diff ECL +1 Outputs
EBE	VCO Disable, ECL Level Input
EBT	VCO Disable, TTL Level Input



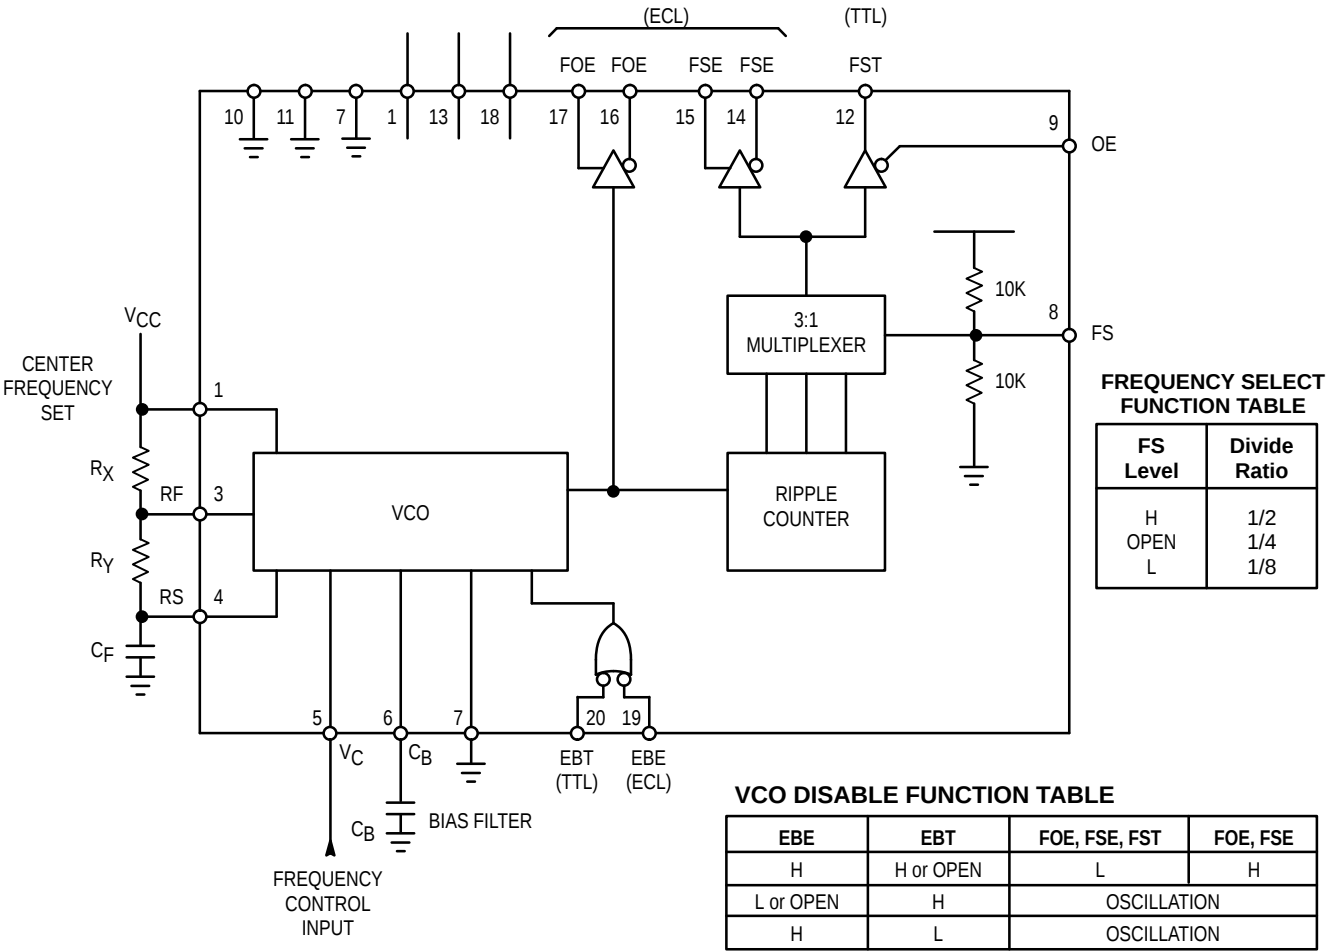


Figure 1. Block Diagram

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V _{CC1} V _{CC2} V _{CC3}	Power Supply Voltage	−0.5 to +8.0	V
V _{IN} (TTL)	Input Voltage	−0.5 to V _{CC}	V
V _{IN} (ECL)	Input Voltage	−0.5 to V _{CC}	V
I _{OUT} (ECL)	Output Source Current – Surge	100	mA
	Output Source Current – Continuous	50	mA
T _J	Junction Operating Temperature	+140	°C
T _{STG}	Storage Temperature	−55 to +150	°C

OPERATING CONDITIONS

Symbol	Parameter	Value	Unit
T _A	Ambient Temperature	0 to +75	°C
V _{CC}	Supply Voltage	+4.75 to +5.25	V
I _{OH} (TTL)	TTL High Output Current	−1.0	mA
I _{OL} (TTL)	TTL Low Output Current	20	mA

DC CHARACTERISTICS ($V_{CC} = 5.0V \pm 5\%$; $R_X = 2.4k\Omega$; $R_Y = 1.5k\Omega$; $C_B = 0.001\mu F$)

Symbol	Characteristic	0°C		25°C			75°C		Unit	Condition
		Min	Max	Min	Typ	Max	Min	Max		
I _{CC}	Supply Current	75	120	65	90	110	80	135	mA	$\overline{EBT} = \overline{EBE} = V_{CC}$ (ECL, TTL)
V _{OLT}	Output Low Voltage, TTL					0.5			V	$F_S = GND$
V _{OHT}	Output High Voltage, TTL			2.4					V	$F_S = GND$
V _{OLE}	Output Low Voltage, ECL			3.0		3.4			V	$V_{CC} = 5.0V$, $R_L = 50\Omega$, $V_T = 3.0V$
V _{OHE}	Output High Voltage, ECL			3.9		4.19			V	$V_{CC} = 5.0V$, $R_L = 50\Omega$, $V_T = 3.0V$
I _{ILT}	$\overline{EBT}$ Input Low Current					400			μA	$V_{IN} = 0.4V$
I _{IHT}	$\overline{EBT}$ Input High Current					20			μA	$V_{IN} = 2.7V$
						100			μA	$V_{IN} = 7.0V$
I _{INHE}	$\overline{EBE}$ Input High Current					250			μA	$V_{IN} = 4.19V$
I _{INLE}	$\overline{EBE}$ Input Low Current			1.0					μA	$V_{IN} = 3.05V$
V _{ILS}	FS Input, Max "L" Level					1.2			V	$V_{CC} = 5.0V$
V _{IMS}	FS Input, "Medium" Level			2.0		3.0			V	$V_{CC} = 5.0V$
V _{IHS}	FS Input, Min "H" Level			3.8					V	$V_{CC} = 5.0V$
V _{ILT}	$\overline{EBT}$ Input Low Voltage		0.8			0.8		0.8	V	
V _{IHT}	$\overline{EBT}$ Input High Voltage	2.0		2.0			2.0		V	
V _{IHE}	$\overline{EBE}$ Input High Voltage			3.87		4.19			V	$V_{CC} = 5.0V$
V _{ILE}	$\overline{EBE}$ Input Low Voltage			3.05		3.52			V	$V_{CC} = 5.0V$
V _{LM}	V_C Input Voltage, $V_C = V_{CC} \div 2$			± 1.1	± 1.3	± 1.5			V	$V_{CC} = 5.0V$
V _{CB}	C_B Output Voltage			2.35	2.50	2.65			V	$V_{CC} = 5.0V$

AC CHARACTERISTICS ($V_{CC} = 5.0V$; $R_X = 2.4k\Omega$; $R_Y = 1.5k\Omega$; $C_B = 0.001\mu F$; $V_T = 3.0V$)

Symbol	Characteristic	0°C		25°C			75°C		Unit	Condition
		Min	Max	Min	Typ	Max	Min	Max		
FO	Center Frequency ($V_{VC} - V_{CB} = 0V$)			180	200	220			MHz	$V_{CC} = +2.0V$ $V_{EE} = -3.0V$
F _{MAX} – F _{MIN}	Frequency Range ($V_C = 1/2 V_{CC} \pm 1.5V$, $V_{CC} = 5.0V$)			85	100	115			MHz	
t _{rE}	FOE/ $\overline{FOE}$ /FSE/ $\overline{FSE}$ Rise Time			0.5		2.4			ns	
t _{fE}	FOE/ $\overline{FOE}$ /FSE/ $\overline{FSE}$ Fall Time			0.5		2.4			ns	
TTT	Reset Time					35			ns	$\overline{EBT} \sim FST$
TTO	Reset Time					25			ns	$\overline{EBT} \sim FOE/\overline{FOE}$
TTS	Reset Time					30			ns	$\overline{EBT} \sim FSE/\overline{FSE}$
TET	Reset Time					37			ns	$\overline{EBE} \sim FST$
TEO	Reset Time					12			ns	$\overline{EBE} \sim FOE/\overline{FOE}$
TES	Reset Time					25			ns	$\overline{EBE} \sim FSE/\overline{FSE}$

Loading: ECL = 50 Ω to V_T ; TTL = 500 Ω , 50pF

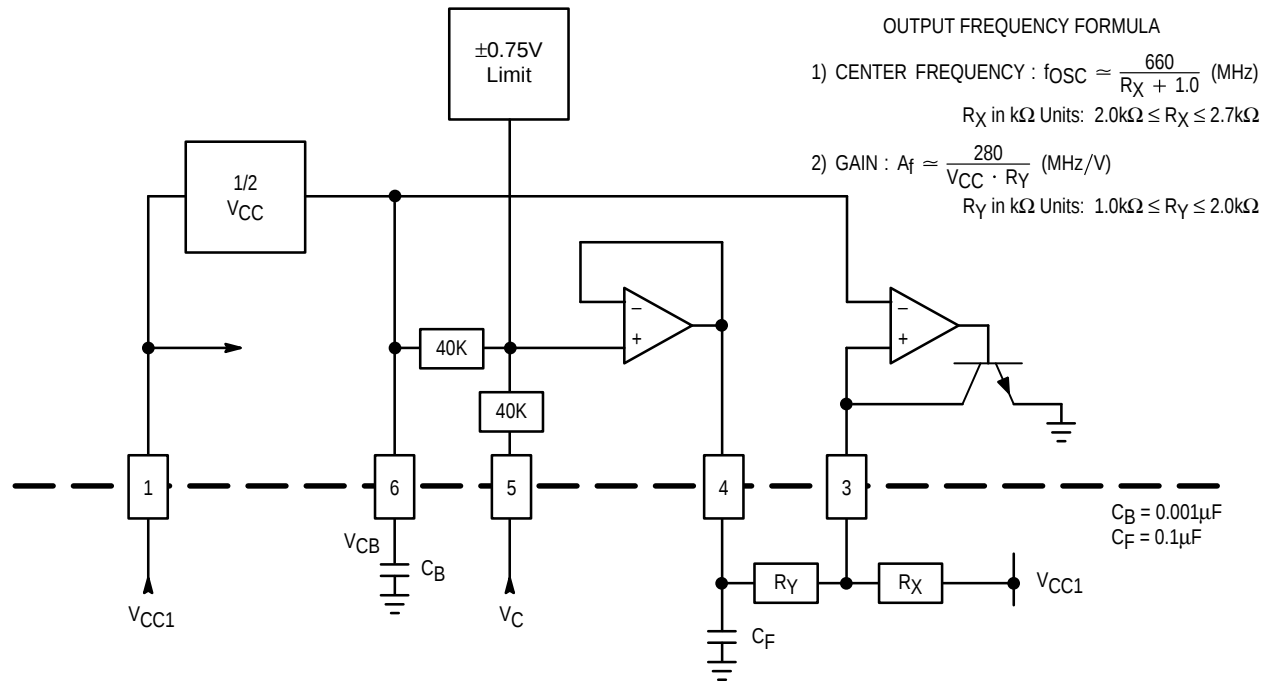


Figure 2. VCO Detail

Notes:

- For optimum VCO linearity (MHz/V), the following resistor ranges are recommended:
 $2.0k\Omega \leq R_X \leq 2.7k\Omega$ ($R_Y = 1.5k\Omega$)
 $1.0k\Omega \leq R_Y \leq 2.0k\Omega$ ($R_X = 2.4k\Omega$)
- TTL output maximum frequency = 50MHz
- Simultaneous use of both ECL and TTL outputs are not recommended due to excessive power consumption for the EIAJ Type II SO package

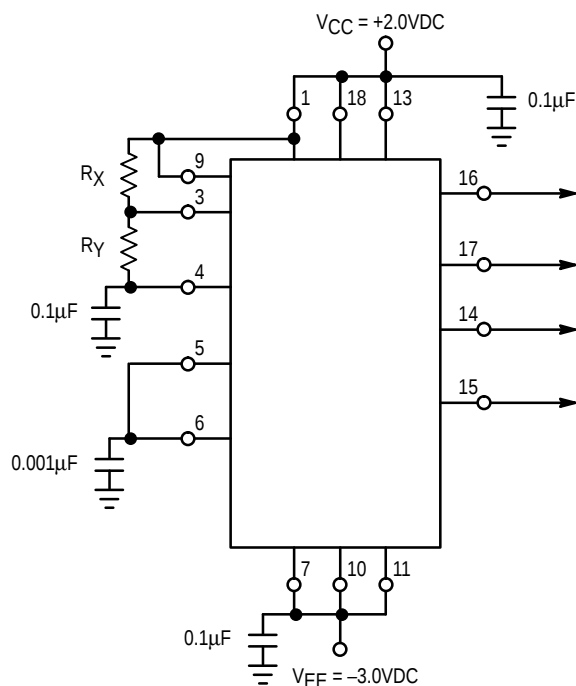
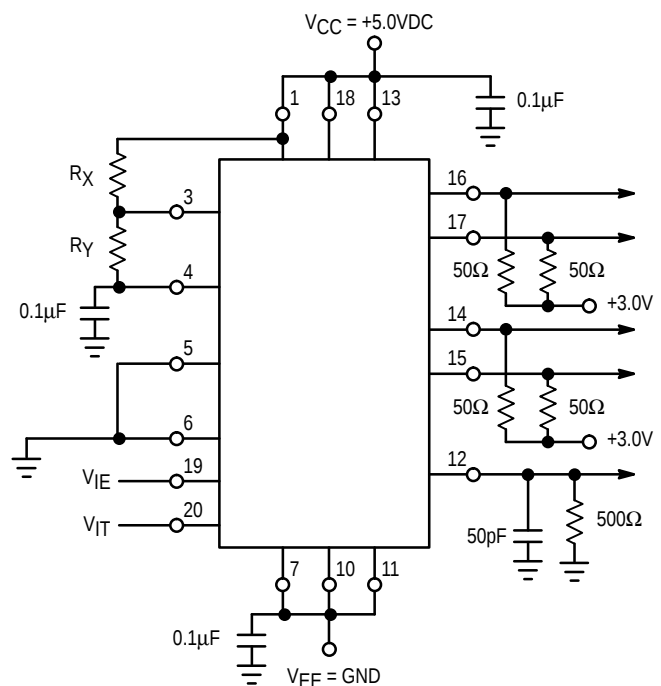
Figure 3. AC Test Circuit ($FO/t_{rE}/t_{fE}$ Measurement)

Figure 4. AC Test Circuit (Other Measurements)

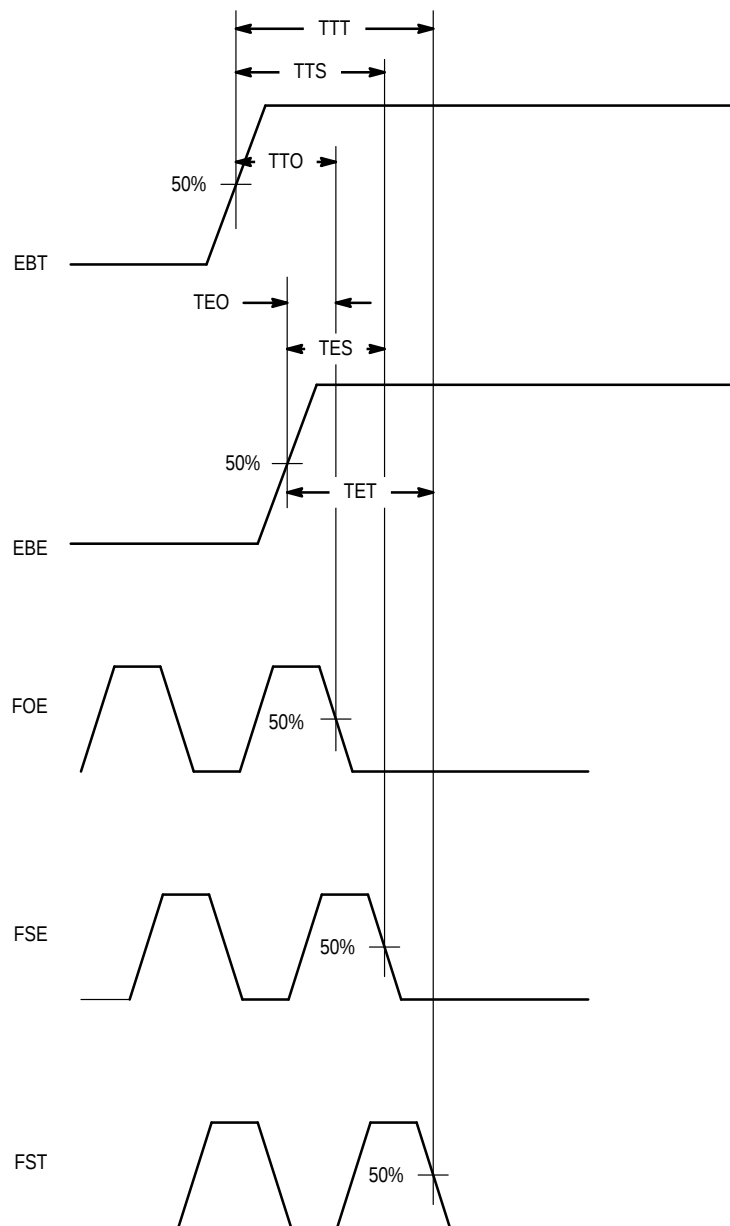


Figure 5. Switching Waveforms

VCO DISABLE FUNCTION TABLE

EBE	EBT	FOE, FSE, FST	FOE, FSE
H	H or OPEN	L	H
L or OPEN	H	OSCILLATION	
H	L	OSCILLATION	

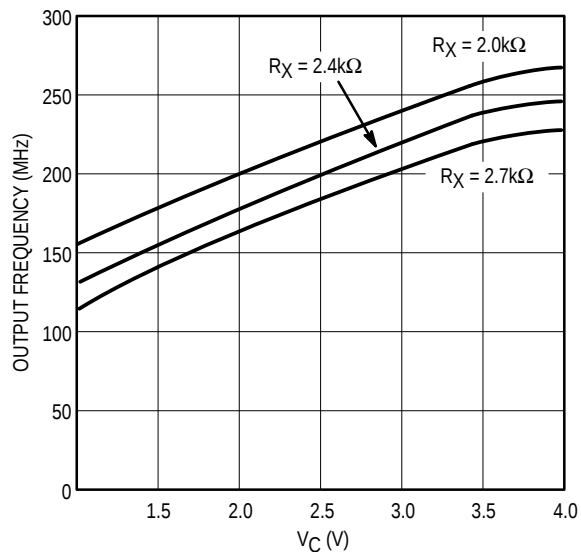


Figure 6. V_C versus Output Frequency
Varying R_X @ $V_{CC} = 5.0V$; $T_A = 25^\circ C$; $R_Y = 1.5k\Omega$

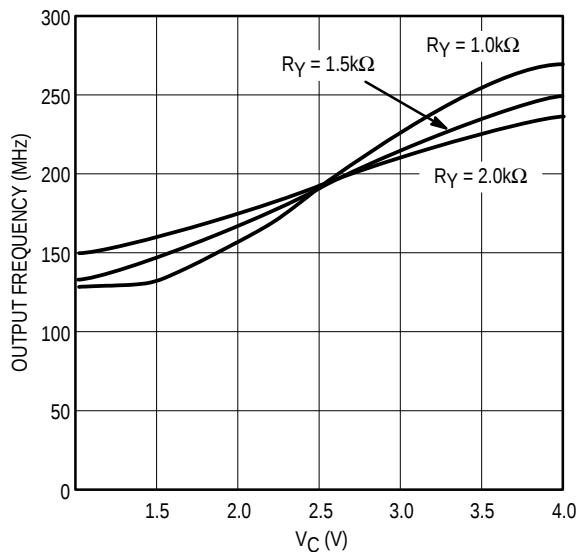


Figure 7. V_C versus Output Frequency
Varying R_Y @ $V_{CC} = 5.0V$; $T_A = 25^\circ C$; $R_X = 2.4k\Omega$

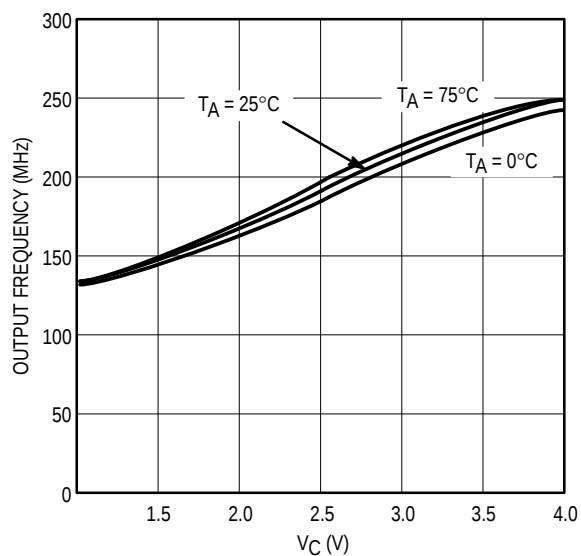


Figure 8. V_C versus Output Frequency
Varying T_A @ $V_{CC} = 5.0V$; $R_X = 2.4k\Omega$; $R_Y = 1.5k\Omega$


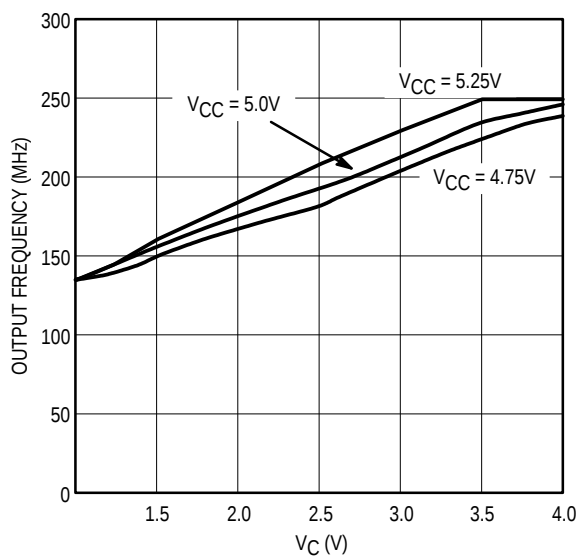


Figure 9. V_C versus Output Frequency
Varying V_{CC} @ $R_X = 2.4k\Omega$; $R_Y = 1.5k\Omega$; $T_A = 25^\circ C$

OUTLINE DIMENSIONS

FN SUFFIX
PLASTIC PLCC PACKAGE
CASE 775-02
ISSUE C

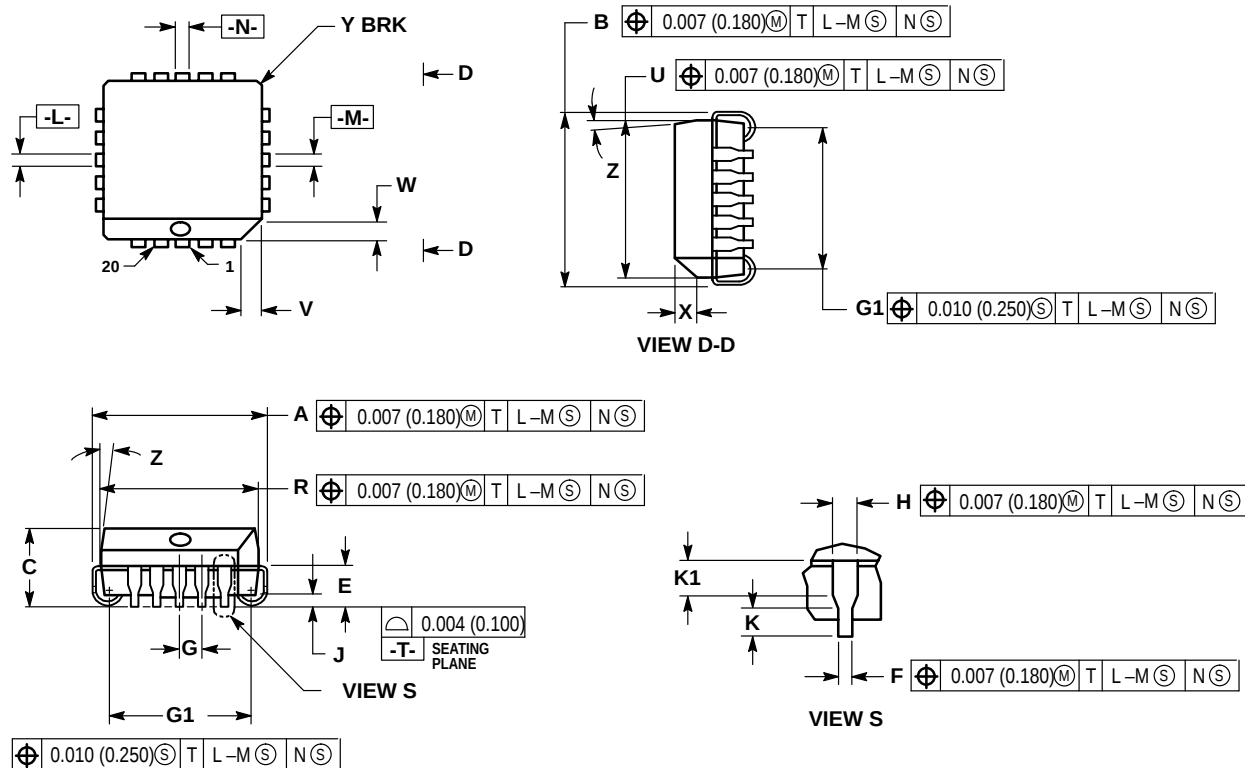


NOTES:

- DATUMS -L-, -M-, AND -N- DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.
- DIM G1, TRUE POSITION TO BE MEASURED AT DATUM -T-, SEATING PLANE.
- DIM R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: INCH.
- THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
- DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.385	0.395	9.78	10.03
B	0.385	0.395	9.78	10.03
C	0.165	0.180	4.20	4.57
E	0.090	0.110	2.29	2.79
F	0.013	0.019	0.33	0.48
G	0.050 BSC		1.27 BSC	
H	0.026	0.032	0.66	0.81
J	0.020	—	0.51	—
K	0.025	—	0.64	—
R	0.350	0.356	8.89	9.04
U	0.350	0.356	8.89	9.04
V	0.042	0.048	1.07	1.21
W	0.042	0.048	1.07	1.21
X	0.042	0.056	1.07	1.42
Y	—	0.020	—	0.50
Z	2°	10°	2°	10°
G1	0.310	0.330	7.88	8.38
K1	0.040	—	1.02	—

OUTLINE DIMENSIONS

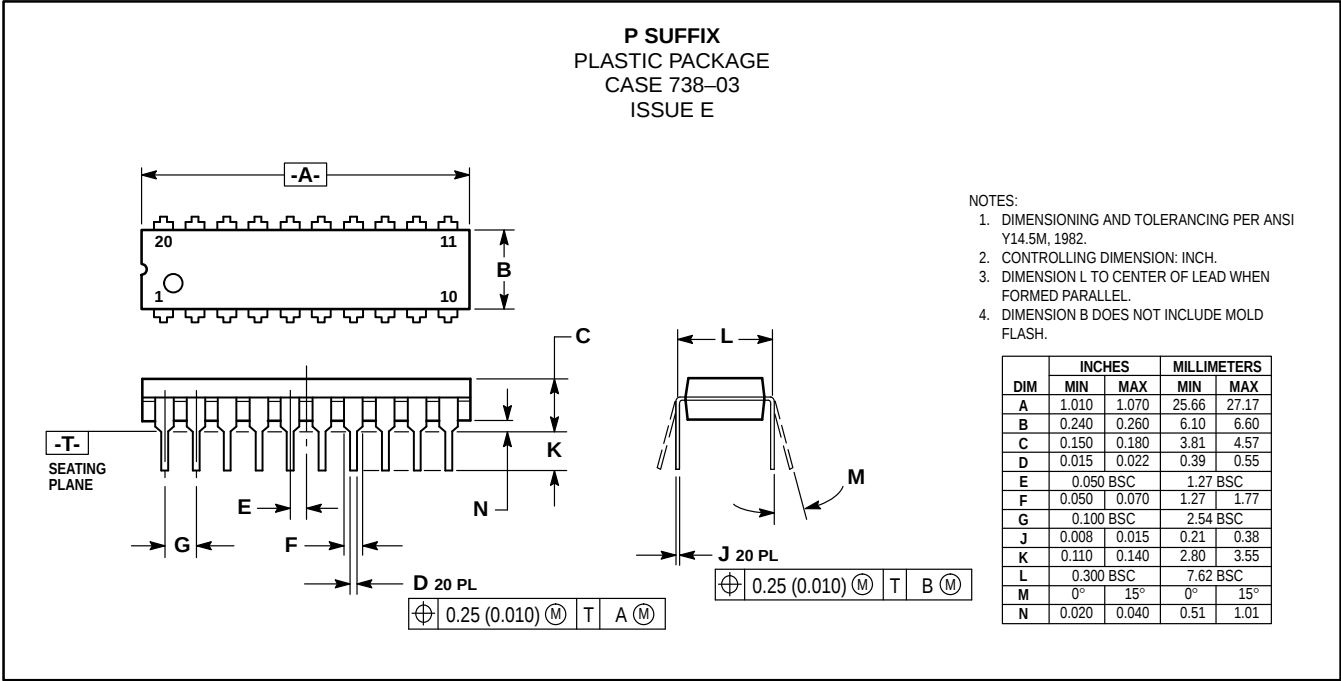

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Literature Distribution Centers:

USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.

EUROPE: Motorola Ltd.; European Literature Centre; 88 Tanners Drive, Blakelands, Milton Keynes, MK14 5BP, England.

JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141 Japan.

ASIA-PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.

