

## Product Preview

# AutoBahn™ Support Device (ABSD)

The ABSD is a bi-directional repeater for use in a serial AutoBahn databus environment. It is a completely asynchronous part. No clock will be used.

During data transmission via the serial system bus, the ABSD receives data from the serial system bus and transmits the data to the receiving AutoBahn. Vice versa, the ABSD transmits data from the AutoBahn on the local side to the serial system bus.

The direction of the transmission is automatically determined by the activities at the serial bus I/O's.

The ABSD is able to handle a data collision, but no collision detect is provided.

A disable pin, which will be controlled by the AutoBahn board, supports the live insertion function. Enabling the ABSD requires a deassertion of the disable signal and a cutoff state at the serial system bus.

- Bi-Directional Data Transmission Up to 1600MBit/s
- 8-Pin CLCC Package
- Differential Data I/Os
- Enables Live Insertion
- Self-Detecting Transmission Direction
- Enables Up to 21 Nodes
- Impedance Controlled Termination

The ABSD supports variable data transfer rates of 400Mbit/s, 800Mbit/s and 1600Mbit/s. This enables the usage in combination with all AutoBahn Spanceiver™ components.

The ABSD will be used either as an active impedance controlled access node to a serial bus system, or it will act as a cable driver or line repeater.


Motorola's MOSAIC V™ process allows high speed designs up to 3GHz. The design is implemented with a flow-through pinout architecture.

The ABSD chip works from a single +5V supply.

**MC100SX1452**

**AUTOBAHN™  
SUPPORT DEVICE  
ABSD**

**FI SUFFIX**  
CERAMIC CLCC PACKAGE  
CASE TBD

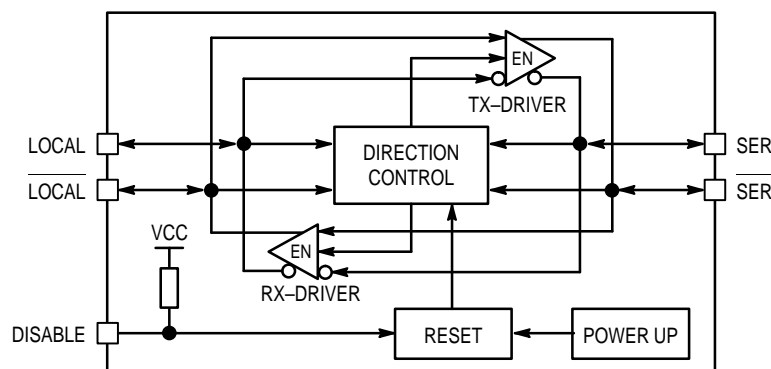

**Figure 1. Simplified Block Diagram**

AutoBahn and Spanceiver are trademarks of PEP Modular Computers.  
'Spanceiver' has been formed as a contraction of Serial/Parallel Transceiver.  
MOSAIC V is a trademark of Motorola, Inc.

This document contains information on a product under development. Motorola reserves the right to change or discontinue this product without notice.



**Table 1. PIN DESCRIPTIONS**

Signal	Pin No	Direction	Level	Description
DISABLE	3	In	PCT	Low level immediately enables the ABSD if the public bus is in cutoff. High level disables the ABSD
SER	6	I/O	CUTOFF-PECL	Serial data I/O at the serial system bus
SER	5	I/O	CUTOFF-PECL	Inverted serial data I/O at the serial system bus
LOCAL	1	I/O	CUTOFF-PECL	Serial data I/O connected to the local AutoBahn serial bus
LOCAL	2	I/O	CUTOFF-PECL	Inverted serial data I/O connected to the local AutoBahn serial bus

**Power and Ground Pins**

GND	4	Supply	–	Ground
VCC	8	Supply	–	Positive supply
VCCO	7	Supply	–	Positive supply output drivers

**BLOCK DIAGRAM FUNCTIONAL DESCRIPTION****MODES OF OPERATION***IDLE MODE*

When RESET is active, both the RX-DRIVER and the TX-DRIVER are in cutoff. After enabling the part, the DRIVERS remain in cutoff state if there is no activity on the local and the public bus. If there is a data transfer running on the public bus after enabling the part, the ABSD switches to RECEIVE MODE.

*RECEIVE MODE*

In the idle mode, when DIRECTION CONTROL recognizes data on the public side, the ABSD switches to RECEIVE MODE. This means the RX-DRIVER becomes active and the TX-DRIVER remains in cutoff-state.

Both buffers remain in their states until the public bus goes to a cutoff state. Then the RX-DRIVER is deasserted again and the logic returns to idle mode.

*TRANSMIT MODE*

In the idle mode, when DIRECTION CONTROL recognizes data on the local side the ABSD switches to TRANSMIT MODE. This means the TX-DRIVER becomes active and the RX-DRIVER remains in cutoff-state.

Both buffers remain in their states until the local bus goes to a cutoff state. Then the TX-DRIVER is deasserted again and the logic returns to idle mode.

*COLLISION DETECT*

In the idle mode, when DIRECTION CONTROL recognizes data on the local side and on the public side at the same time, the ABSD goes to RECEIVE MODE. The signals on the SER/SER bus (back plane) are not disturbed. On the local bus a data-collision occurs and the local AutoBahn Spanceiver shows an error.

**POWER UP LOGIC**

When the voltage drops below 4.6V an internal RESET-signal is generated.

**RESET-LOGIC**

The DISABLE signal indicates to the ABSD the disconnection of the local AutoBahn Spanceiver or board from the back plane, e.g., during a self test or plug/unplug of the board.

The DISABLE or the internal generated power up reset sets the internal logic to a known state. The RX-DRIVER and the TX-DRIVER are set to cutoff state. The DISABLE pin is terminated internally with a pull up resistor.

**TX-DRIVER**

The TX-DRIVER is a cutoff driver. The DIRECTION CONTROL circuit monitors the local bus. When a stable differential signal is detected the TX-DRIVER is enabled.

**RX-DRIVER**

The RX-DRIVER is a cutoff driver. The DIRECTION CONTROL circuit monitors the public bus. When a stable differential signal is detected the RX-DRIVER is enabled.

### SERIAL BUS IO CHARACTERISTICS

To achieve best multipoint performance the serial IO's have lowest output impedance during transmit mode and high input impedance in receive mode.

If the serial IO's are in a cutoff mode the DC input impedance is above  $10\text{k}\Omega$ . During transmit mode (differential) the IO's show a output impedance of  $6\Omega - 8\Omega$ .

### TYPICAL SERIAL BUS APPLICATION


The ABSD is a bi-directional repeater for the serial

AutoBahn databus. It is a completely asynchronous part. No clock will be used.


During data transmission via the serial system bus, the ABSD receives data from the serial system bus and transmits these data to the receiving AutoBahn. Vice versa, the ABSD transmits data from the AutoBahn on the local side to the serial system bus.

The direction of the transmission is determined by the activities at the serial bus I/O's.


The ABSD is able to handle a data collision, but no collision detect is provided.

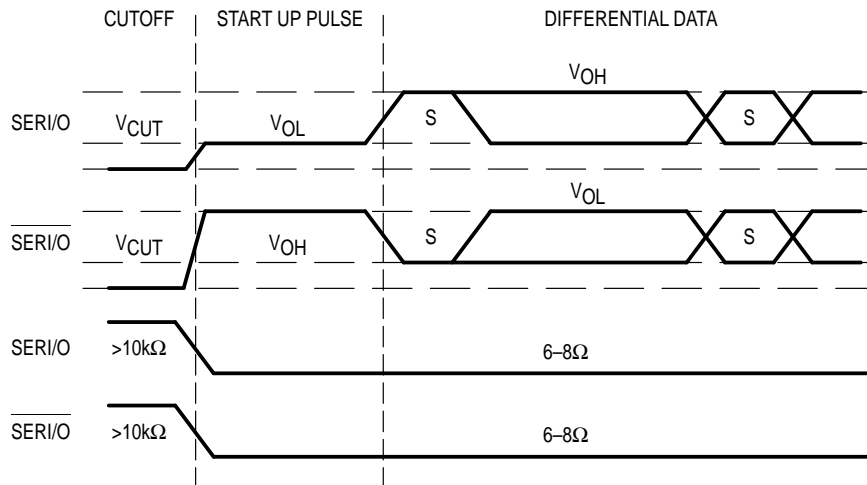


**Figure 2. Output Driver Characteristics – Serial I/O**  
(LOCAL and SER)

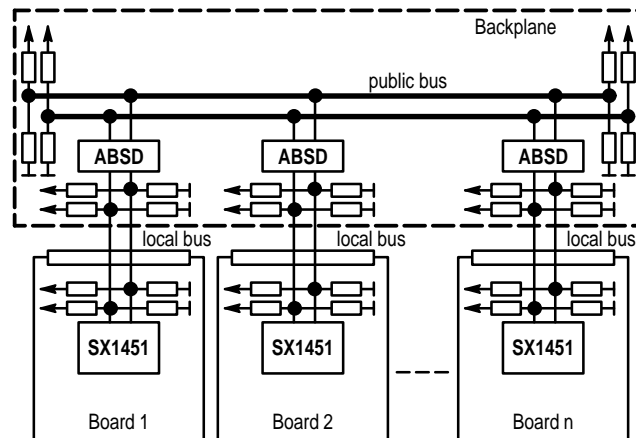

**Figure 3. Serial Bus Application**

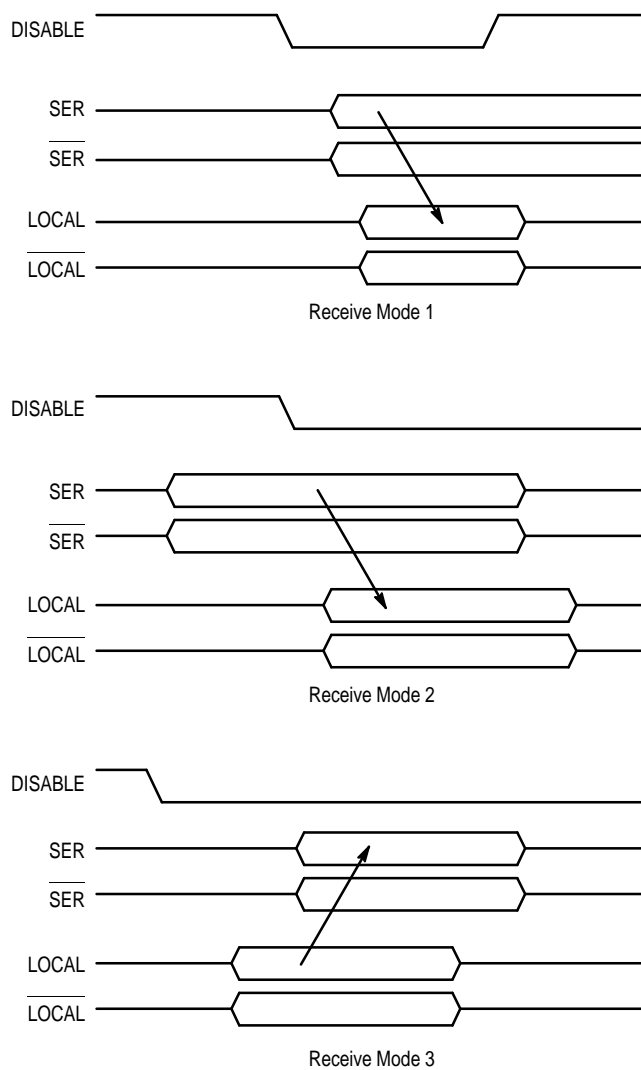

**Figure 4. Functional Timings**

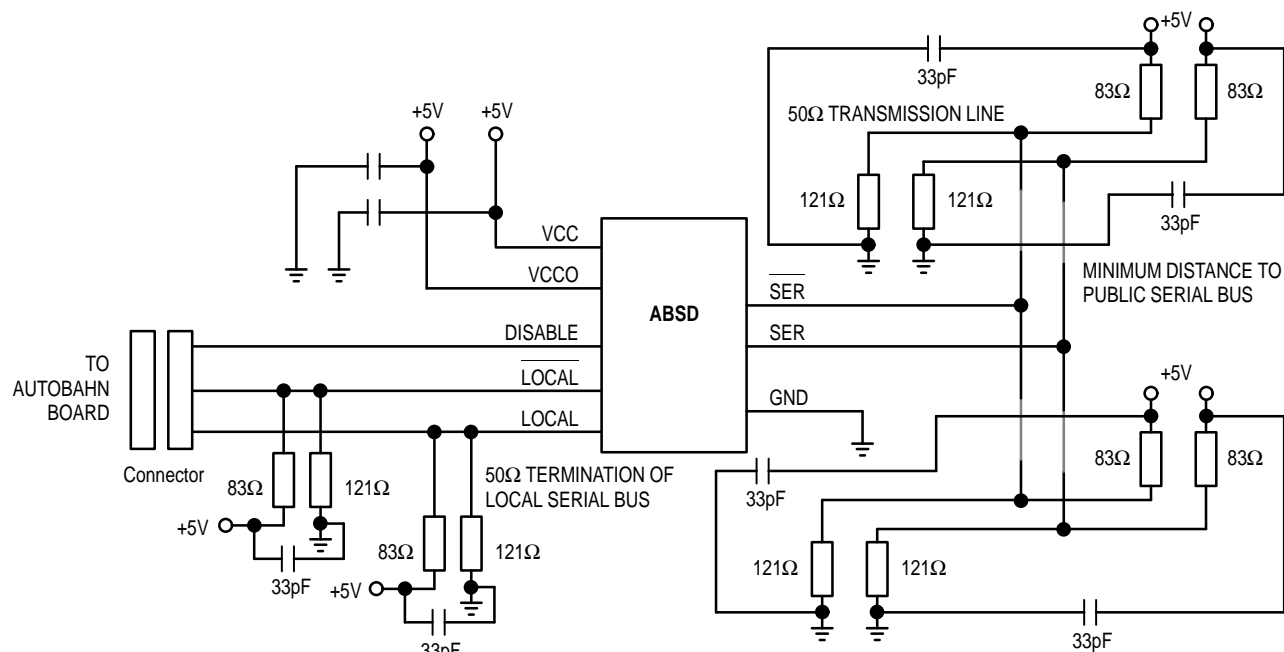

### Figure 5. ABSD Interface Design

**MAXIMUM RATINGS\***

Symbol	Parameter	Value	Unit
V <sub>CC</sub> , V <sub>CCO</sub>	DC Supply Voltage (Referenced to GND)	−0.5 to +7.0	V
T <sub>A</sub>	Operating Temperature Range (Ambient)	0 to +70	°C
T <sub>STG</sub>	Storage Temperature Range	−55 to +125	°C

\* Maximum Ratings are those values beyond which damage to the device may occur. Functional operation should be restricted to the Recommended Operating Conditions.

## DC CHARACTERISTICS

Symbol	Characteristic	Min	Typ	Max	Unit	Condition
V <sub>CC</sub> , V <sub>CCO</sub>	Supply Voltage	4.75		5.25	V	
V <sub>IH</sub>	PECL Input High Level			4.12	V	Note 1.
V <sub>Icut</sub>	PECL Input Cutoff Level	3.00		3.07	V	Note 1.
V <sub>IL</sub>	PECL Input Low Level	3.19			V	Note 1.
V <sub>P-PD</sub>	Input Swing Differential	150		1200	mV	Note 1.
V <sub>P-PC</sub>	Input Swing Start-Up Pulse	300		1200	mV	Note 1.
V <sub>OH</sub>	PECL Output High Level	3.975		4.120	V	Note 1.
V <sub>Ocut</sub>	PECL Output Cutoff Level	3.00		3.07	V	Note 1.
V <sub>OL</sub>	PECL Output Low Level	3.19		3.38	V	Note 1.
I <sub>OUT</sub>	PECL Output Current Continuous Surge	50 100			mA	
V <sub>IHTTL</sub>	Input High TTL	2.0			V	
V <sub>ILTTL</sub>	Input Low TTL			0.8	V	
I <sub>ILTTL</sub>	Input Current Low Level		-0.6		mA	V <sub>in</sub> = 0.5V
I <sub>IHTTL</sub>	Input Current High Level					V <sub>in</sub> = 2.7V
C <sub>INECL</sub>	Input Capacitance			2.0	pF	

1.  $V_{CC} = 5V$ ; Output Load  $25\Omega$  to  $+3V$ .


## DC CHARACTERISTICS

Symbol	Characteristic	Min	Typ	Max	Unit	Condition
f <sub>max</sub>	Maximum Frequency	0.9	1.0		GHz	Note 2.
DR	Data Rate	1.8	2.0		GBit/s	Note 2.
t <sub>f</sub> , t <sub>r</sub>	Rise and Fall Time		150		ps	20%–80% at 50pF, 25Ω
PH	Phase Variation	–25		+25	ps	Note 2.
dDL	Differential Delay	–5		+5	ps	Note 2.
pDL	Propagation Delay					Note 3.
t <sub>en</sub>	Enable Time					
t <sub>de</sub>	Disable Time					
	AC Load		50		pF	Notes 2., 4.
V <sub>res</sub>	Power-Up Threshold		4.6		V	

2.  $V_{CC} = 5V$ ; Output Load  $25\Omega$  to  $+3V$ .

2.  $V_{CC} = 5V$ ; Output Load 20k $\Omega$  to 10V.
3. The propagation delay is not relevant for functionality.


4. This is equivalent to 21 nodes.



### Figure 6. 8—Lead Pinout (Top View)

## OUTLINE DIMENSIONS

**FI SUFFIX**  
**CERAMIC CLCC PACKAGE**  
**CASE TBD**  
**ISSUE TBD**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

**How to reach us:**

**USA/EUROPE/Locations Not Listed:** Motorola Literature Distribution;  
P.O. Box 5405, Denver, Colorado 80217. 303-675-2140 or 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.: SPD, Strategic Planning Office, 4-32-1,  
Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan. 81-3-5487-8488

**Mfax™:** RMFAX0@email.sps.mot.com – TOUCHTONE 602-244-6609  
– US & Canada ONLY 1-800-774-1848

**ASIA/PACIFIC:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

**INTERNET:** <http://motorola.com/sps>

