

Programmable logic array

(22 × 42 × 10)

PLUS173–10

DESCRIPTION

The PLUS173–10 PLD is a high speed, combinatorial Programmable Logic Array. The Philips Semiconductors state-of-the-art Oxide Isolated Bipolar fabrication process is employed to produce maximum propagation delays of 10ns or less.

The 24-pin PLUS173–10 device has a programmable AND array and a programmable OR array. Unlike PAL[®] devices, 100% product term sharing is supported. Any of the 32 logic product terms can be connected to any or all of the 10 output OR gates. Most PAL ICs are limited to 7 AND terms per OR function; the PLUS173–10 device can support up to 32 input wide OR functions.

The polarity of each output is user-programmable as either Active-High or Active-Low, thus allowing AND-OR or AND-NOR logic implementation. This feature adds an element of design flexibility, particularly when implementing complex decoding functions.

The PLUS173–10 device is user-programmable using one of several commercially available, industry standard PLD programmers.


FEATURES

- I/O propagation delays
 - 10ns (worst case)
- Functional superset of 20L10 and most other 24-pin combinatorial PAL devices
- Two programmable arrays
 - Supports 32 input wide OR functions
- 12 inputs
- 10 bi-directional I/O
- 42 AND gates
 - 32 logic product terms
 - 10 direction control terms
- Programmable output polarity
 - Active-High or Active-Low
- Security fuse
- 3-State outputs
- Power dissipation: 850mW (typ.)
- TTL Compatible

APPLICATIONS

- Random logic
- Code converters
- Fault detectors
- Function generators
- Address mapping
- Multiplexing

PIN CONFIGURATIONS

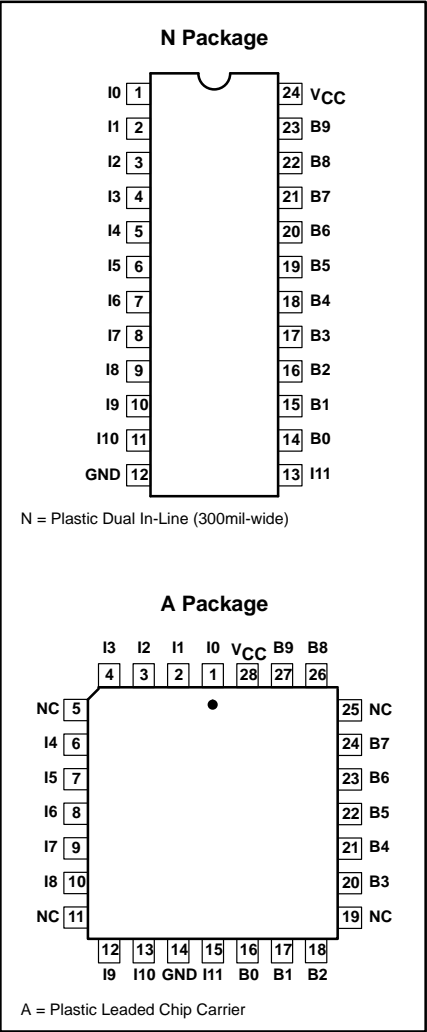


Programmable logic array

(22 × 42 × 10)

PLUS173-10


LOGIC DIAGRAM

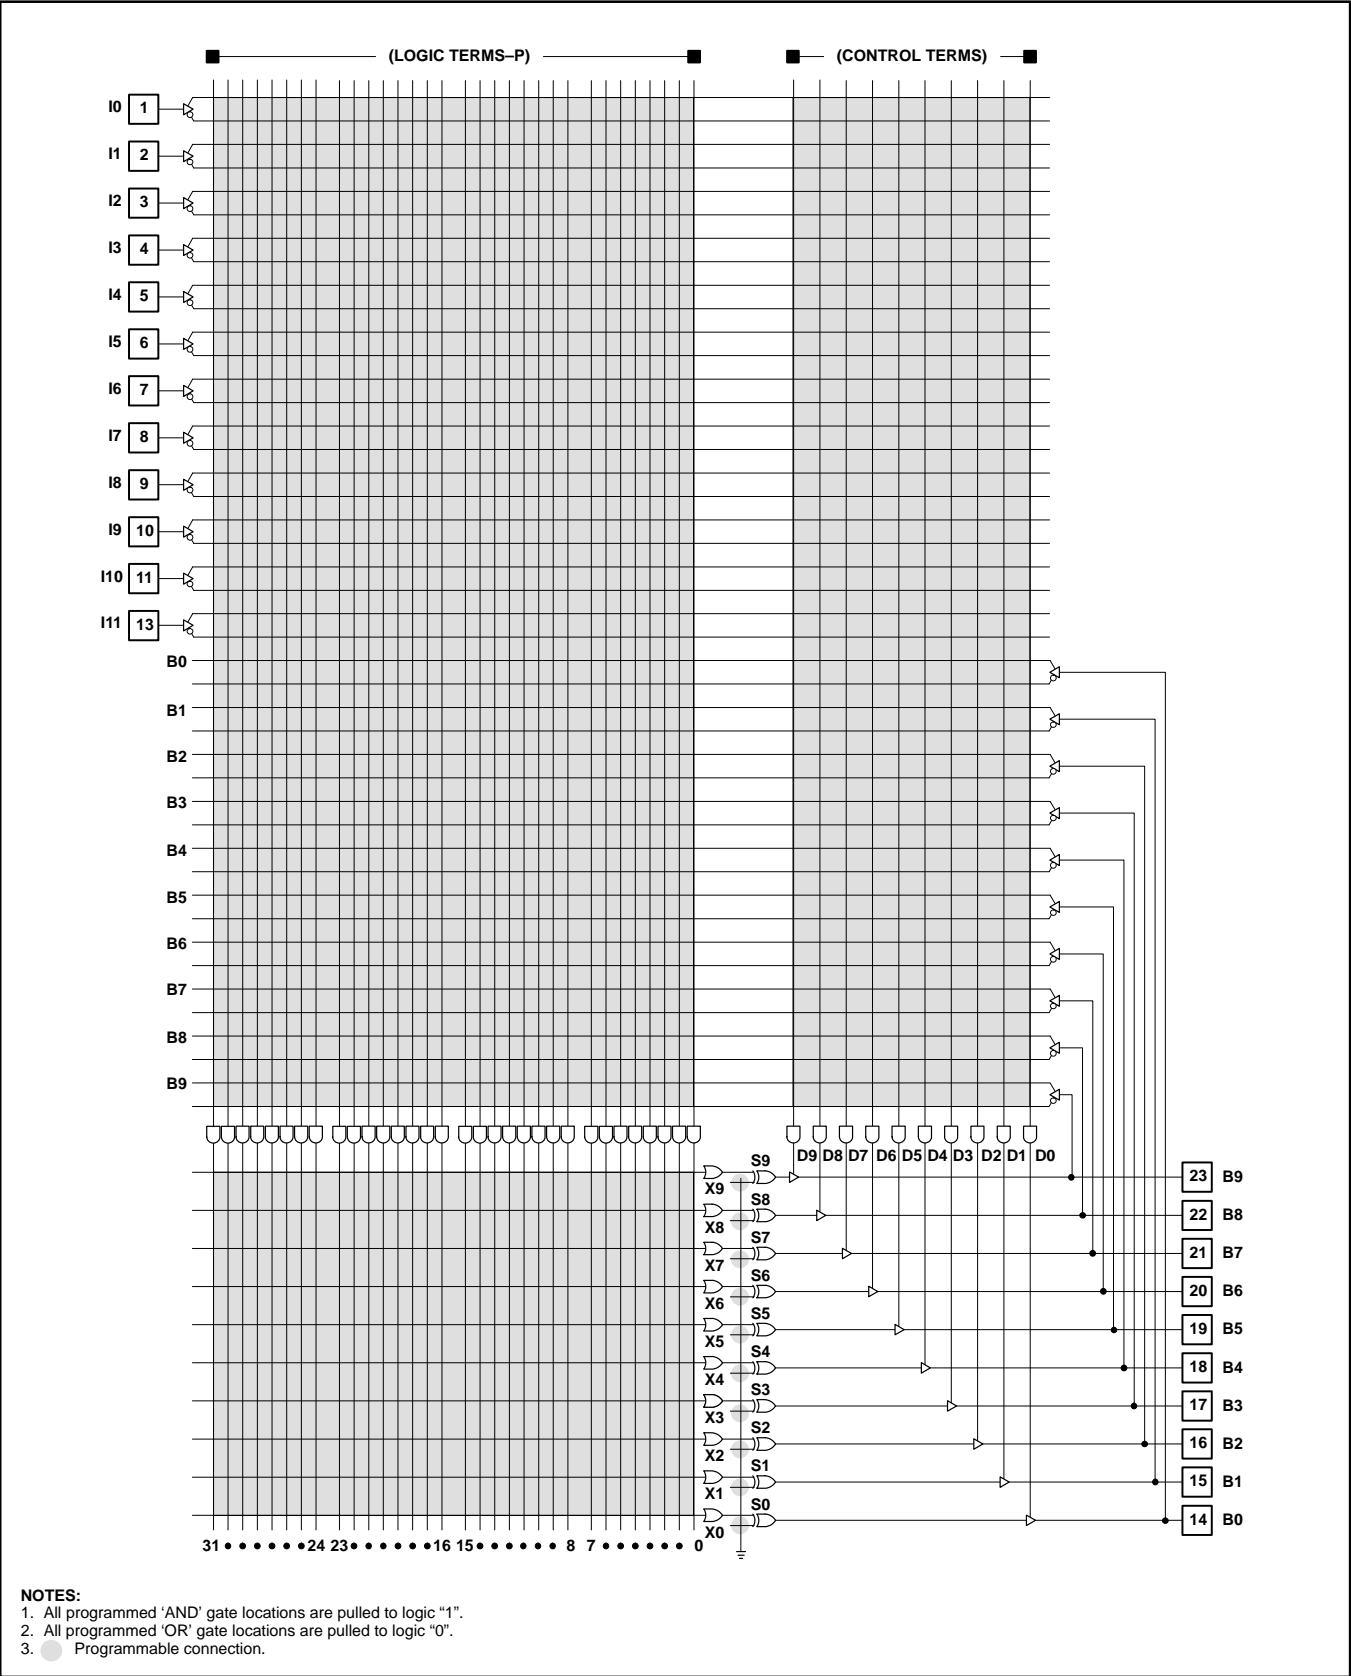

Programmable logic array
(22 × 42 × 10)

PLUS173–10

FUNCTIONAL DIAGRAM

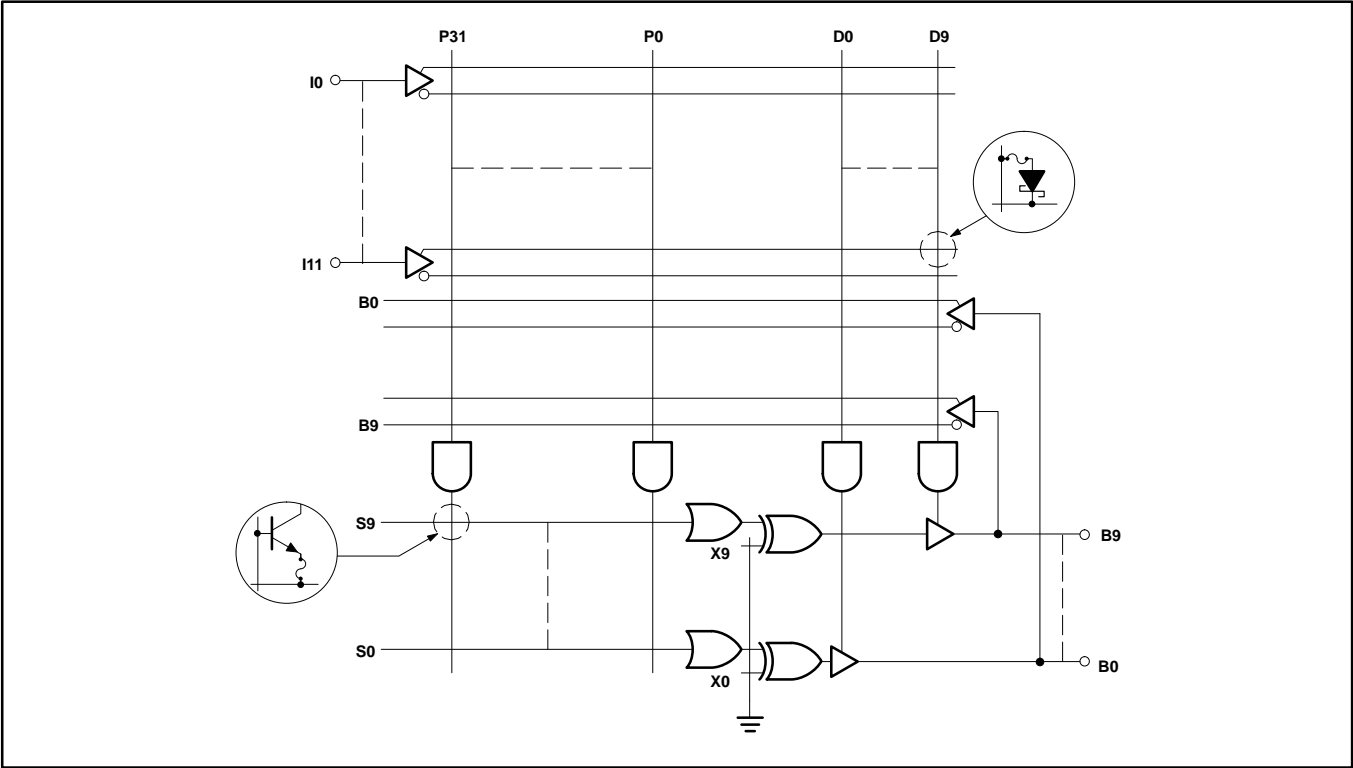

ABSOLUTE MAXIMUM RATINGS¹

| SYMBOL | PARAMETER | RATING | | UNIT |
|------------------|--------------------------------------|--------|--------|-----------------|
| | | Min | Max | |
| V _{CC} | Supply voltage | | +7 | V _{DC} |
| V _{IN} | Input voltage | | +5.5 | V _{DC} |
| V _{OUT} | Output voltage | | +5.5 | V _{DC} |
| I _{IN} | Input currents | −30 | +30 | mA |
| I _{OUT} | Output currents | | +100.0 | mA |
| T _{amb} | Operating free-air temperature range | 0 | +75 | °C |
| T _{stg} | Storage temperature range | −65 | +150 | °C |

NOTES:

1. Stresses above those listed may cause malfunction or permanent damage to the device. This is a stress rating only. Functional operation at these or any other condition above those indicated in the operational and programming specification of the device is not implied.

THERMAL RATINGS

| TEMPERATURE | |
|---|-------|
| Maximum junction | 150°C |
| Maximum ambient | 75°C |
| Allowable thermal rise ambient to junction | 75°C |

Programmable logic array (22 × 42 × 10)

PLUS173–10

DC ELECTRICAL CHARACTERISTICS

 $0^{\circ}\text{C} \leq T_{\text{amb}} \leq +75^{\circ}\text{C}$, $4.75 \leq V_{\text{CC}} \leq 5.25\text{V}$

| SYMBOL | PARAMETER | TEST CONDITIONS | LIMITS | | | UNIT |
|-----------------------------|---|--|--------|------------------|-----|------|
| | | | MIN | TYP ¹ | MAX | |
| Input voltage ² | | | | | | |
| V _{IL} | Low | V _{CC} = MIN | 2.0 | | 0.8 | V |
| V _{IH} | High | V _{CC} = MAX | | | V | |
| V _{IC} | Clamp | V _{CC} = MIN, I _{IN} = −12mA | | | V | |
| Output voltage ² | | | | | | |
| V _{OL} | Low ⁴ | V _{CC} = MIN I _{OL} = 15mA | 2.4 | | 0.4 | V |
| V _{OH} | High ⁵ | I _{OH} = −2mA | | | 0.5 | V |
| Input current ⁹ | | | | | | |
| I _{IL} | Low | V _{CC} = MAX V _{IN} = 0.45V | | | −20 | μA |
| I _{IH} | High | V _{IN} = V _{CC} | | | 1 | 40 |
| Output current | | | | | | |
| I _{O(OFF)} | Hi-Z state ⁸ | V _{CC} = MAX V _{OUT} = 2.7V V _{OUT} = 0.45V | −15 | | 0 | μA |
| I _{OS} | Short circuit ^{3, 5, 6} | V _{OUT} = 0V | | | −15 | −140 |
| I _{CC} | V _{CC} supply current ⁷ | V _{CC} = MAX | | | 170 | mA |
| Capacitance | | | | | | |
| I _{IN} | Input | V _{CC} = 5V V _{IN} = 2.0V | | | 8 | pF |
| C _B | I/O | V _B = 2.0V | | | 15 | pF |

NOTES:

1. All typical values are at $V_{\text{CC}} = 5\text{V}$, $T_{\text{amb}} = +25^{\circ}\text{C}$.
2. All voltage values are with respect to network ground terminal.
3. Test one at a time.
4. Measured with inputs $I_0 - I_4 = 0\text{V}$, inputs $I_5 - I_9 = 4.5\text{V}$, $I_{11} = 4.5\text{V}$ and $I_{10} = 10\text{V}$. For outputs $B_0 - B_4$ and for outputs $B_5 - B_9$ apply the same conditions except $I_{11} = 0\text{V}$.
5. Same conditions as Note 4 except input $I_{11} = +10\text{V}$.
6. Duration of short circuit should not exceed 1 second.
7. I_{CC} is measured with inputs $I_0 - I_{11}$ and $B_0 - B_9 = 0\text{V}$. Part in Virgin State.
8. Leakage values are a combination of input and output leakage.
9. I_{IL} and I_{IH} limits are for dedicated inputs only ($I_0 - I_{11}$).

Programmable logic array
(22 × 42 × 10)

PLUS173–10

AC ELECTRICAL CHARACTERISTICS


0°C ≤ T_{amb} ≤ +75°C, 4.75 ≤ V_{CC} ≤ 5.25V, R₁ = 300Ω, R₂ = 390Ω

| SYMBOL | PARAMETER | FROM | TO | TEST CONDITION | LIMITS | | | UNIT |
|-----------------|--------------------------------|-----------|------------|-----------------------|--------|-----|-----|------|
| | | | | | MIN | TYP | MAX | |
| t _{PD} | Propagation Delay ² | Input +/– | Output +/– | C _L = 30pF | | 8 | 10 | ns |
| t _{OE} | Output Enable ¹ | Input +/– | Output – | C _L = 30pF | | 8 | 10 | ns |
| t _{OD} | Output Disable ¹ | Input +/– | Output + | C _L = 5pF | | 8 | 10 | ns |


NOTES:

1. For 3-State outputs; output enable times are tested with C_L = 30pF to the 1.5V level, and S₁ is open for high-impedance to High tests and closed for high-impedance to Low tests. Output disable times are tested with C_L = 5pF. High-to-High impedance tests are made to an output voltage of V_T = (V_{OH} – 0.5V) with S₁ open, and Low-to-High impedance tests are made to the V_T = (V_{OL} + 0.5V) level with S₁ closed.
2. All propagation delays are measured and specified under worst case conditions.

VOLTAGE WAVEFORM

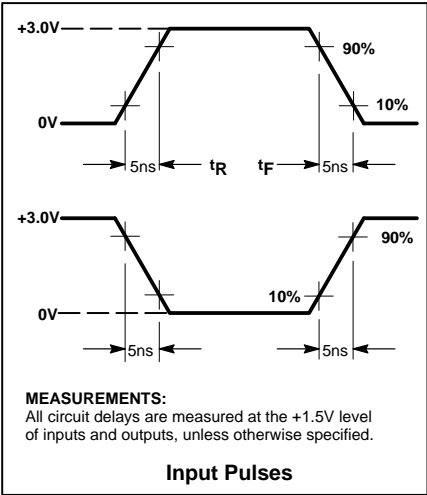


TEST LOAD CIRCUIT

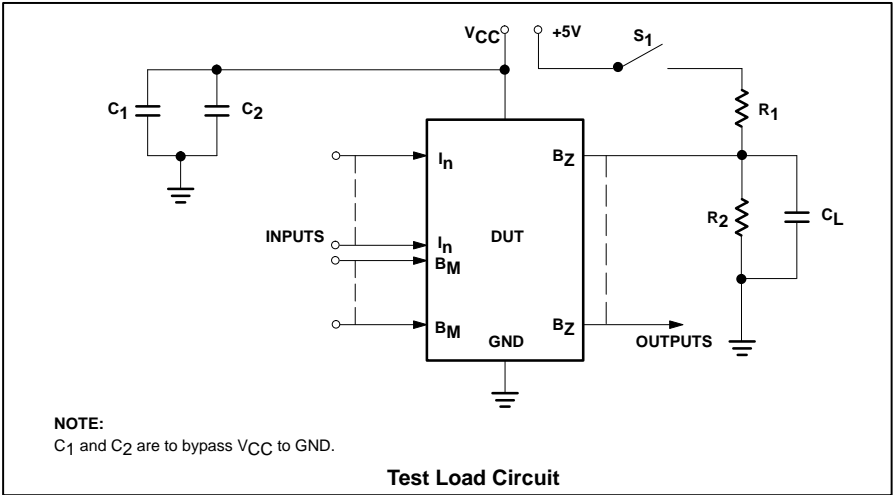

TIMING DEFINITIONS

| SYMBOL | PARAMETER |
|-----------------|---|
| t _{PD} | Propagation delay between input and output. |
| t _{OD} | Delay between input change and when output is off (Hi-Z or High). |
| t _{OE} | Delay between input change and when output reflects specified output level. |

TIMING DIAGRAM

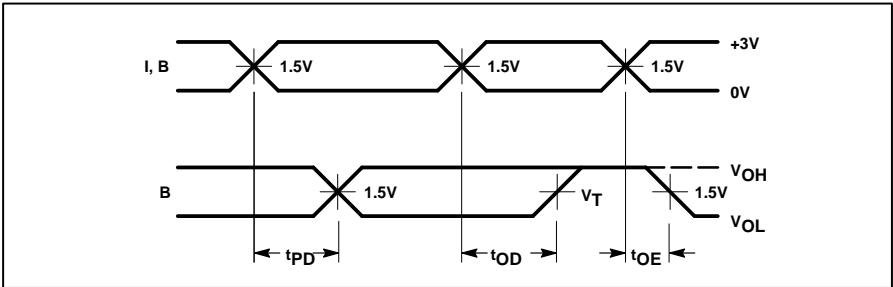

Programmable logic array

(22 × 42 × 10)

PLUS173–10

LOGIC PROGRAMMING

The PLUS173–10 is fully supported by industry standard (JEDEC compatible) PLD CAD tools, including Philips Semiconductors SNAP design software package. ABEL™ and CUPL™ design software packages also support the PLUS173–10 architecture.

All packages allow Boolean and state equation entry formats. SNAP, ABEL and CUPL also accept, as input, schematic capture format.


PLUS173–10 logic designs can also be generated using the program table entry format, which is detailed on the following page. This program table entry format is supported by SNAP only.

To implement the desired logic functions, the state of each logic variable from logic equations (I, B, O, P, etc.) is assigned a symbol. The symbols for TRUE, COMPLEMENT, INACTIVE, PRESET, etc., are defined below.


PROGRAMMING AND SOFTWARE SUPPORT

Refer to Section 9 (*Development Software*) and Section 10 (*Third-party Programmer/Software Support*) of this data handbook for additional information.

OUTPUT POLARITY – (B)

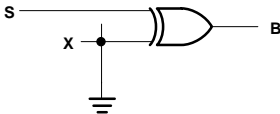


| ACTIVE LEVEL | CODE |
|--------------------------------------|------|
| HIGH ¹ (NON-INVERTING) | H |

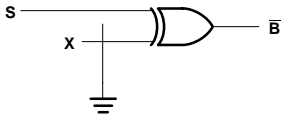


| ACTIVE LEVEL | CODE |
|--------------------|------|
| LOW (INVERTING) | L |


AND ARRAY – (I, B)




| STATE | CODE |
|--------------------------|------|
| INACTIVE ^{1, 2} | O |



| STATE | CODE |
|-------|------|
| I, B | H |




| STATE | CODE |
|-------|------|
| I, B | L |




| STATE | CODE |
|------------|------|
| DON'T CARE | – |

OR ARRAY – (B)



| P _n STATUS | CODE |
|-----------------------|------|
| ACTIVE ¹ | A |



| P _n STATUS | CODE |
|-----------------------|------|
| INACTIVE | • |

VIRGIN STATE

A factory shipped virgin device contains all fusible links intact, such that:

1. All outputs are at "H" polarity.
2. All P_n terms are disabled.
3. All P_n terms are active on all outputs.

NOTES:

1. This is the initial unprogrammed state of all link pairs. It is normally associated with all unused (inactive) AND gates P_n, D_n.
2. Any gate P_n, D_n will be unconditionally inhibited if both the true and complement of any input (I, B) are left intact.

ABEL is a trademark of Data I/O Corp.
CUPL is a trademark of Logical Devices, Inc.

Programmable logic array
(22 × 42 × 10)

PLUS173–10

PLA PROGRAM TABLE

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|----|---------|------------------|----------|----|---------|---|----------|---|-----|---|---|----|----|------|----|----|----|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|---|---|---|
| <div>CUSTOMER NAME</div> <div>PHILIPS DEVICE #</div> <div>PROGRAM TABLE # REV DATE</div> | | | T E R M | AND | | | | | | | | | | | | | | | | | | | | | | POLARITY | | | | | | | | | |
| | | | | I | | | | | | | | | | | B(I) | | | | | | | | | | | OR | | | | | | | | | |
| | | | | B(0) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 14 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 17 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 19 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 21 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 23 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 27 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 28 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 29 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PIN | 13 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | | | |
| VARIABLE NAME | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AND | | I, B(I) | | OR | | A, B(0) | | CONTROL | | POL | | | | | | | | | | | | | | | | | | | | | | | | | |
| INACTIVE | | 0 | | ACTIVE | | A | | INACTIVE | | H | | | | | | | | | | | | | | | | | | | | | | | | | |
| I, B | | H | | INACTIVE | | B(0) | | CONTROL | | L | | | | | | | | | | | | | | | | | | | | | | | | | |
| I, B | | L | | INACTIVE | | B(0) | | CONTROL | | H | | | | | | | | | | | | | | | | | | | | | | | | | |
| DON'T CARE | | — | | INACTIVE | | B(0) | | CONTROL | | L | | | | | | | | | | | | | | | | | | | | | | | | | |

Programmable logic array
(22 × 42 × 10)

PLUS173-10

SNAP RESOURCE SUMMARY DESIGNATIONS

