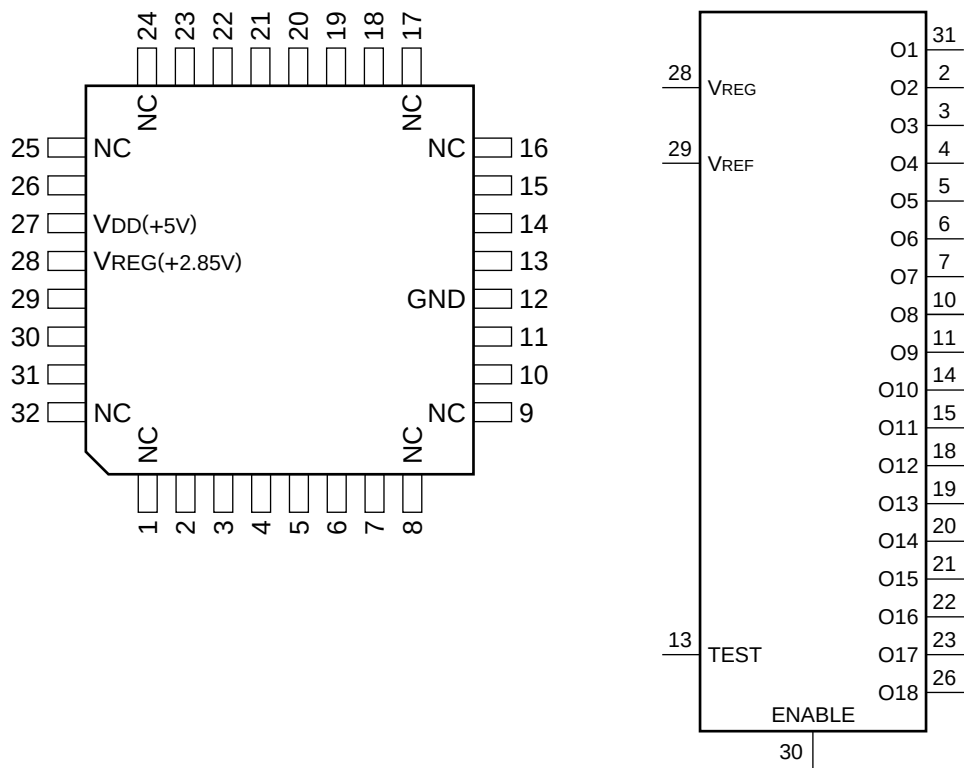

C-MOS 18-BIT SWITCHABLE ACTIVE SCSI BUS TERMINATOR

—TOP VIEW—



PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	NC (HEAT SINK)	9	—	NC (HEAT SINK)	17	—	NC (HEAT SINK)	25	—	NC (HEAT SINK)
2	O	O2	10	O	O8	18	O	O12	26	O	O18
3	O	O3	11	O	O9	19	O	O13	27	—	VDD
4	O	O4	12	—	GND	20	O	O14	28	I	VREG
5	O	O5	13	I	TEST	21	O	O15	29	I	VREF
6	O	O6	14	O	O10	22	O	O16	30	I	ENABLE
7	O	O7	15	O	O11	23	O	O17	31	O	O1
8	—	NC (HEAT SINK)	16	—	NC (HEAT SINK)	24	—	NC (HEAT SINK)	32	—	NC (HEAT SINK)

