


SN54FB2041A, SN74FB2041A 7-BIT TTL/BTL TRANSCEIVERS


SCBS172F – NOVEMBER 1991 – REVISED JUNE 1997

- Compatible With IEEE Std 1194.1-1991 (BTL)
- TTL A Port, Backplane Transceiver Logic (BTL) \bar{B} Port
- Open-Collector \bar{B} -Port Outputs Sink 100 mA
- Isolated Logic-Ground and Bus-Ground Pins Reduce Noise
- BIAS V_{CC} Pin Minimizes Signal Distortion During Live Insertion or Withdrawal
- High-Impedance State During Power Up and Power Down
- \bar{B} -Port Biasing Network Preconditions the Connector and PC Trace to the BTL High-Level Voltage
- TTL Input Structures Incorporate Active Clamping to Aid in Line Termination
- Package Options Include Plastic Quad Flat (RC) Package and Ceramic Flat (WD) Package

SN54FB2041A . . . WD PACKAGE
(TOP VIEW)

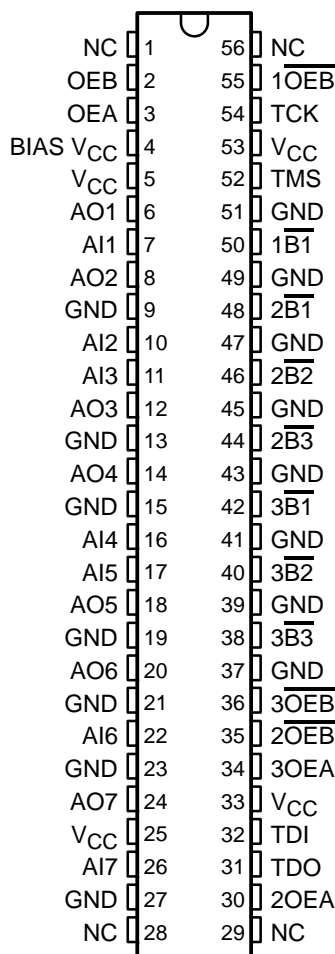

SN74FB2041A . . . RC PACKAGE
(TOP VIEW)

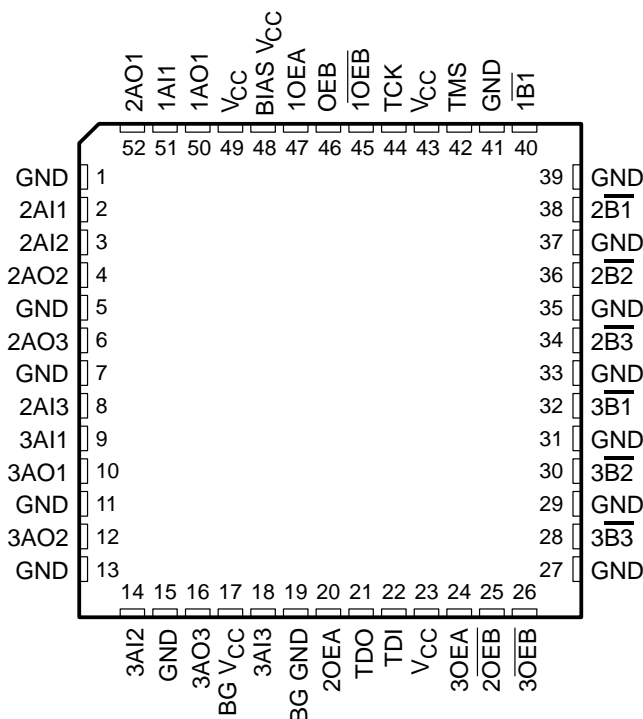

NC – No internal connection



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

UNLESS OTHERWISE NOTED this document contains PRODUCTION DATA information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1997, Texas Instruments Incorporated
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

SN54FB2041A, SN74FB2041A

7-BIT TTL/BTL TRANSCEIVERS

SCBS172F – NOVEMBER 1991 – REVISED JUNE 1997

description

The 'FB2041A are 7-bit transceivers designed to translate signals between TTL and backplane transceiver logic (BTL) environments. They are specifically designed to be compatible with IEEE Std 1194.1-1991.

The \bar{B} port operates at BTL signal levels. The open-collector \bar{B} ports are specified to sink 100 mA. Two output enables (OEB and \overline{OEB}) are provided for the \bar{B} outputs. When OEB is high and \overline{OEB} is low, the \bar{B} port is active and reflects the inverse of the data present at the A-input pins. When OEB is low, \overline{OEB} is high, or V_{CC} is less than 2.1 V, the \bar{B} port is turned off. The enable/disable logic partitions the device as two 3-bit sections and one 1-bit section.

The A port operates at TTL signal levels and has split input and output pins. The A outputs reflect the inverse of the data at the \bar{B} port when the A-port output enable (OEA) is high. When OEA is low or when V_{CC} is less than 2.1 V, the A outputs are in the high-impedance state.

Pins are allocated for the four-wire IEEE Std 1149.1 (JTAG) test bus. Currently, TMS and TCK are not connected and TDI is shorted to TDO.


BIAS V_{CC} establishes a voltage between 1.62 V and 2.1 V on the BTL outputs when V_{CC} is not connected.

The SN54FB2041A is characterized for operation over the full military temperature range of -55°C to 125°C . The SN74FB2041A is characterized for operation from 0°C to 70°C .

FUNCTION TABLE

INPUTS			FUNCTION
OEB	\overline{OEB}	OEA	
L	X	L	Isolation
X	H	L	
L	X	H	\bar{B} data to AO bus
X	H	H	
H	L	L	\bar{A} data to B bus
H	L	H	\bar{A} data to B bus, \bar{B} data to AO bus

logic symbol†

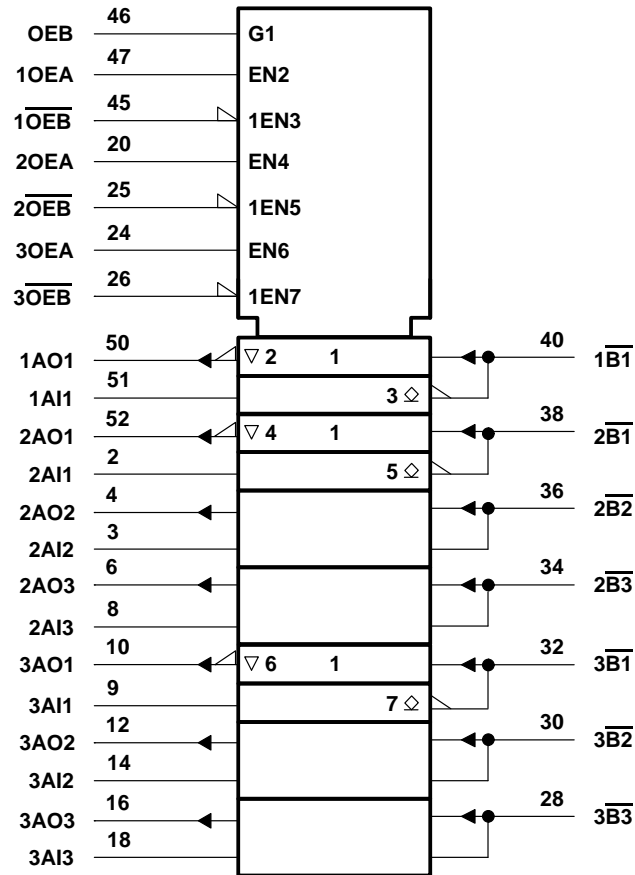


† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.
Pin numbers shown are for the RC package.

SN54FB2041A, SN74FB2041A 7-BIT TTL/BTL TRANSCEIVERS

SCBS172F – NOVEMBER 1991 – REVISED JUNE 1997

functional block diagram

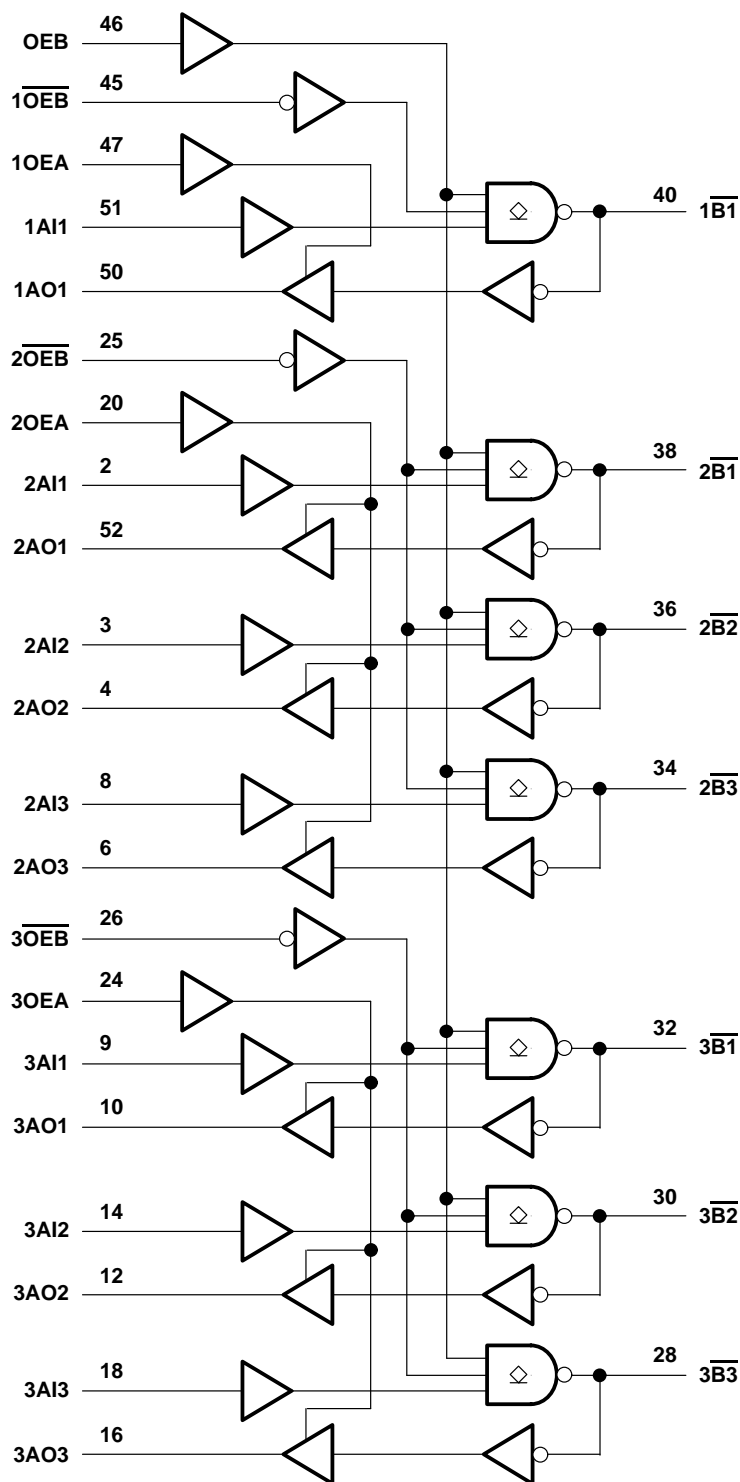

Pin numbers shown are for the RC package.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V_{CC}	–0.5 V to 7 V
Input voltage range, V_I : Except \bar{B} port	–1.2 V to 7 V
\bar{B} port	–1.2 V to 3.5 V
Voltage range applied to any \bar{B} output in the disabled or power-off state, V_O	–0.5 V to 3.5 V
Voltage range applied to any output in the high state, V_O : A port	–0.5 V to V_{CC}
Input clamp current, I_{IK} : Except \bar{B} port	–40 mA
\bar{B} port	–18 mA
Current applied to any single output in the low state, I_O : A port	48 mA
\bar{B} port	200 mA
Package thermal impedance, θ_{JA} (see Note 1): RC package	79°C/W
Storage temperature range, T_{stg}	–65°C to 150°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The package thermal impedance is calculated in accordance with JESD 51.

recommended operating conditions (see Note 2)

			SN54FB2041A			SN74FB2041A			UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	
V_{CC} , BIAS V_{CC} , BG V_{CC}	Supply voltage		4.5	5	5.5	4.5	5	5.5	V
V_{IH}	High-level input voltage	\bar{B} port	1.62		2.3	1.62		2.3	V
		Except \bar{B} port	2			2			
V_{IL}	Low-level input voltage	\bar{B} port	0.75		1.47	0.75		1.47	V
		Except \bar{B} port			0.8			0.8	
I_{IK}	Input clamp current				–18			–18	mA
I_{OH}	High-level output current	AO port			–3			–3	mA
I_{OL}	Low-level output current	AO port			24			24	mA
		\bar{B} port			100			100	
T_A	Operating free-air temperature		–55		125	0		70	°C

NOTE 2: Unused pins (input or I/O) must be held high or low to prevent them from floating.

SN54FB2041A, SN74FB2041A 7-BIT TTL/BTL TRANSCEIVERS

SCBS172F – NOVEMBER 1991 – REVISED JUNE 1997

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		SN54FB2041A			SN74FB2041A			UNIT
				MIN	TYP†	MAX	MIN	TYP†	MAX	
V_{IK}	\overline{B} port	$V_{CC} = 4.5\text{ V}$, $I_I = -18\text{ mA}$				-1.2			-1.2	V
	Except \overline{B} port	$V_{CC} = 4.5\text{ V}$, $I_I = -40\text{ mA}$				-0.5			-0.5	
V_{OH}	AO port	$V_{CC} = 4.5\text{ V}$	$I_{OH} = -1\text{ mA}$			3.2				V
			$I_{OH} = -3\text{ mA}$	2.5	3.3		2.5	3.3		
V_{OL}	AO port	$V_{CC} = 4.5\text{ V}$	$I_{OL} = 20\text{ mA}$			0.31				V
			$I_{OL} = 24\text{ mA}$			0.35	0.5		0.35	
	\overline{B} port	$V_{CC} = 4.5\text{ V}$	$I_{OL} = 80\text{ mA}$	0.75		1.1	0.75		1.1	
			$I_{OL} = 100\text{ mA}$			1.15			1.15	
I_I	Except \overline{B} port	$V_{CC} = 5.5\text{ V}$, $V_I = 5.5\text{ V}$				50			50	μA
I_{IH}^\ddagger	Except \overline{B} port	$V_{CC} = 5.5\text{ V}$, $V_I = 2.7\text{ V}$				50			50	μA
I_{IL}^\ddagger	Except \overline{B} port	$V_{CC} = 5.5\text{ V}$, $V_I = 0.5\text{ V}$				-50			-50	μA
	\overline{B} port	$V_{CC} = 5.5\text{ V}$, $V_I = 0.75\text{ V}$				-100			-100	
I_{OH}	\overline{B} port	$V_{CC} = 0\text{ to }5.5\text{ V}$, $V_O = 2.1\text{ V}$				100			100	μA
I_{OZH}	AO port	$V_{CC} = 5.5\text{ V}$, $V_O = 2.7\text{ V}$				50			50	μA
I_{OZL}	AO port	$V_{CC} = 5.5\text{ V}$, $V_O = 0.5\text{ V}$				-50			-50	μA
I_{OZPU}^\S	AO port	$V_{CC} = 0\text{ to }2.1\text{ V}$, $V_O = 0.5\text{ V to }2.7\text{ V}$				50			50	μA
I_{OZPD}^\S	AO port	$V_{CC} = 2.1\text{ V to }0$, $V_O = 0.5\text{ V to }2.7\text{ V}$				-50			-50	μA
I_{OS}^\P	AO port	$V_{CC} = 5.5\text{ V}$, $V_O = 0$		-30		-150	-30		-180	mA
I_{CC}	AI port to \overline{B} port	$V_{CC} = 5.5\text{ V}$, $I_O = 0$				45			45	mA
	\overline{B} port to AO port					65			65	
C_i	AI port	$V_I = 0.5\text{ V or }2.5\text{ V}$						3		pF
	Control inputs							3		
C_o	AO port	$V_O = 0.5\text{ V or }2.5\text{ V}$						5.5		pF
C_{io}^\S	\overline{B} port per IEEE Std 1194.1-1991	$V_{CC} = 0\text{ to }4.5\text{ V}$				6			5	pF
		$V_{CC} = 4.5\text{ V to }5.5\text{ V}$				5			5	

† All typical values are at $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$.

‡ For I/O ports, the parameters I_{IH} and I_{IL} include the off-state output current.

§ This parameter is warranted but not production tested.

¶ Not more than one output should be shorted at a time, and the duration of the short circuit should not exceed one second.

live-insertion specifications over recommended operating free-air temperature range

PARAMETER		TEST CONDITIONS		SN54FB2041A		SN74FB2041A		UNIT
				MIN	MAX	MIN	MAX	
I_{CC} (BIAS V_{CC})		$V_{CC} = 0\text{ to }4.5\text{ V}$	$V_B = 0\text{ to }2\text{ V}$, V_I (BIAS V_{CC}) = $4.5\text{ V to }5.5\text{ V}$		450		450	μA
		$V_{CC} = 4.5\text{ V to }5.5\text{ V}$			10		10	
V_O	\overline{B} port	$V_{CC} = 0$, V_I (BIAS V_{CC}) = 5 V		1.62	2.1	1.62	2.1	V
I_O	\overline{B} port	$V_{CC} = 0$, $V_B = 1\text{ V}$, V_I (BIAS V_{CC}) = $4.5\text{ V to }5.5\text{ V}$		-1		-1		μA
		$V_{CC} = 0\text{ to }5.5\text{ V}$, $OEB = 0\text{ to }0.8\text{ V}$			100		100	
		$V_{CC} = 0\text{ to }2.2\text{ V}$, $OEB = 0\text{ to }5\text{ V}$			100		100	

PRODUCT PREVIEW information concerns products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.



SN54FB2041A, SN74FB2041A 7-BIT TTL/BTL TRANSCEIVERS

SCBS172F – NOVEMBER 1991 – REVISED JUNE 1997

switching characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 1)


PARAMETER		FROM (INPUT)	TO (OUTPUT)	V _{CC} = 5 V, T _A = 25°C			SN54FB2041A		SN74FB2041A		UNIT
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t _{PLH}	AI	\overline{B}	2.3	3.9	5.1			2	5.6	ns	
t _{PHL}			2.6	4.1	5			2.5	5.3		
t _{PLH}	\overline{B}	AO	2	3.6	4.8			1.7	5.3	ns	
t _{PHL}			2.3	3.8	4.9			2	6.4		
t _{PLH}	OEB	\overline{B}	3	4.6	5.8			2.6	6.3	ns	
t _{PHL}			3.1	4.7	6			3.1	6.2		
t _{PLH}	\overline{OEB}	\overline{B}	2.7	4.3	5.6			2.6	5.8	ns	
t _{PHL}			2.7	4.2	5.3			2.5	6.4		
t _{PZH}	OEA	AO	1.5	3.2	5.2			1.5	5.2	ns	
t _{PZL}			1.1	2.8	5			1	5		
t _{PHZ}	OEA	AO	1	2.4	3.9			1	4.2	ns	
t _{PLZ}			2.2	3.8	5.6			1.7	5.8		
t _{sk(p)} [†]	Skew for any single channel, t _{PHL} – t _{PLH} AI to \overline{B} or \overline{B} to AO		0.5							ns	
t _{sk(o)} [†]	Skew between drivers in the same package, AI to \overline{B} or \overline{B} to AO		0.4							ns	
t _t	Rise time, 1.3 V to 1.8 V, \overline{B} outputs		1	1.6	2.4			1	2.5	ns	
	Fall time, 1.8 V to 1.3 V, \overline{B} outputs		1	1.4	2.3			1	2.4		
t _(pr)	\overline{B} -port input pulse rejection		1					1		ns	

[†] Skew values are applicable for through mode only.


SN54FB2041A, SN74FB2041A 7-BIT TTL/BTL TRANSCEIVERS

SCBS172F – NOVEMBER 1991 – REVISED JUNE 1997


PARAMETER MEASUREMENT INFORMATION

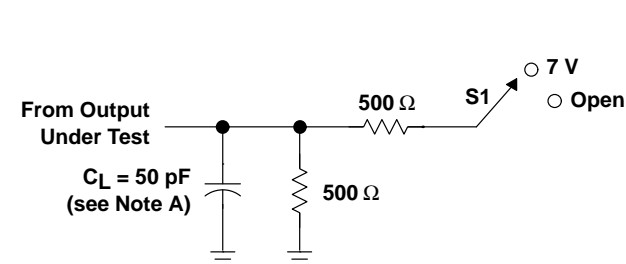


LOAD CIRCUIT FOR A OUTPUTS

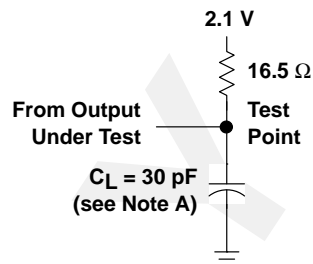


LOAD CIRCUIT FOR B OUTPUTS

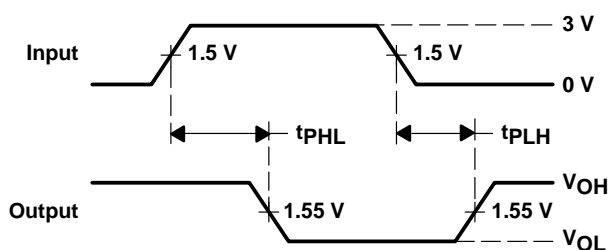

VOLTAGE WAVEFORMS
PROPAGATION DELAY TIMES (A TO B)

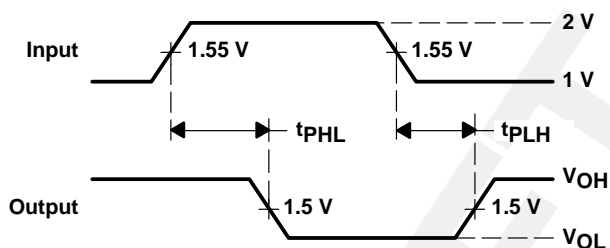

VOLTAGE WAVEFORMS
PROPAGATION DELAY TIMES (B TO A)

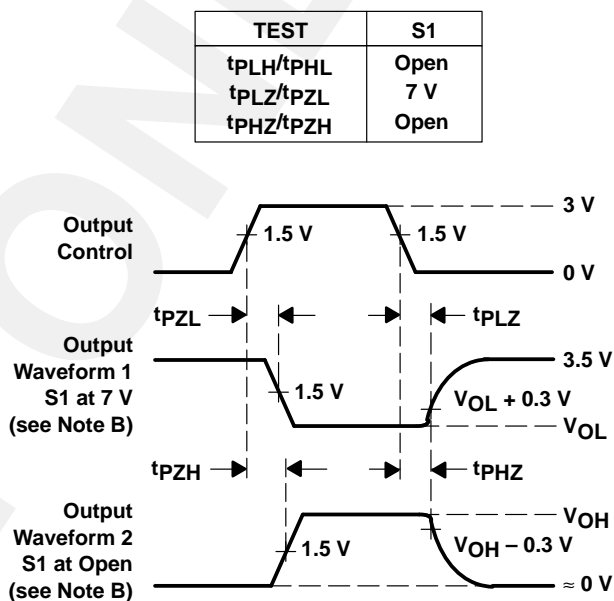

VOLTAGE WAVEFORMS
ENABLE AND DISABLE TIMES (A PORT)

- NOTES: A. C_L includes probe and jig capacitance.
- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: TTL inputs: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r \leq 2.5 \text{ ns}$, $t_f \leq 2.5 \text{ ns}$; BTL inputs: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r \leq 2.5 \text{ ns}$, $t_f \leq 2.5 \text{ ns}$.
- D. The outputs are measured one at a time with one transition per measurement.

Figure 1. Load Circuits and Voltage Waveforms

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.