


20-BIT SERIAL INPUT D/A CONVERTER

—TOP VIEW—

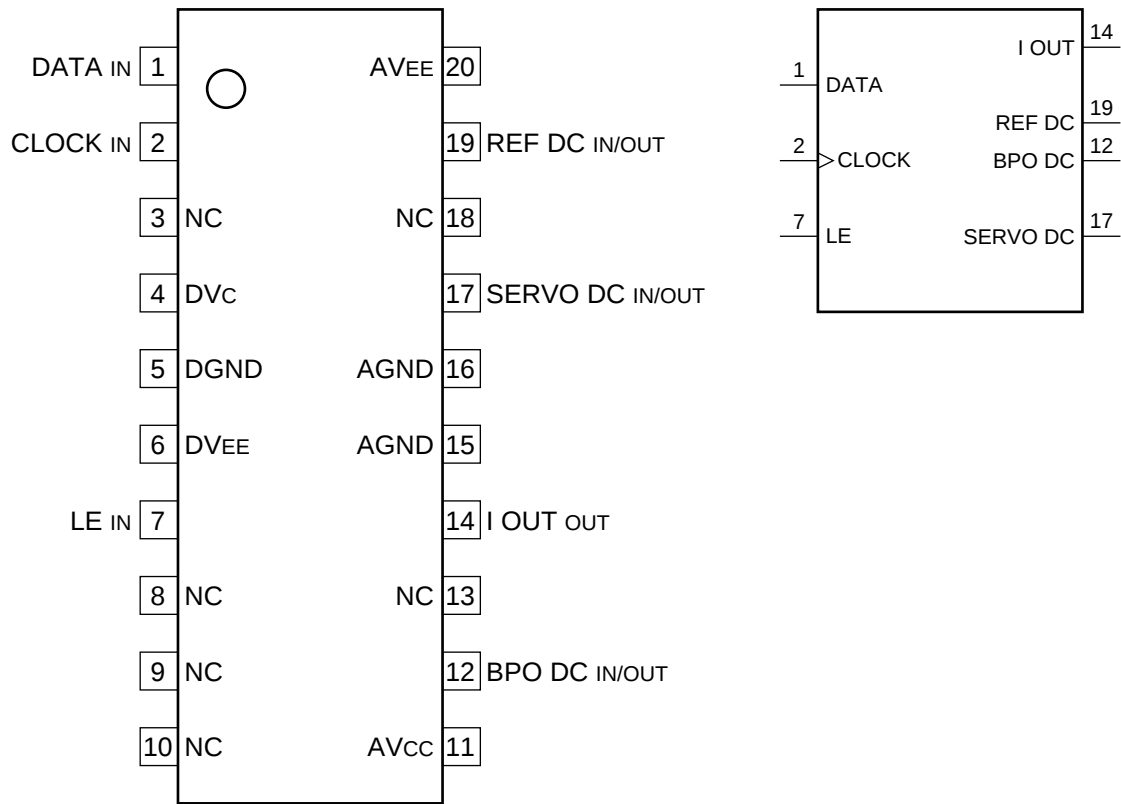

BPO DC : BIPOLAR OFFSET FILTER
 CLOCK : BIT CLOCK INPUT
 DATA : SERIAL DATA INPUT
 I OUT : CURRENT OUTPUT
 LE : LATCH ENABLE INPUT
 REF DC : REFERENCE FILTER
 SERVO DC : SERVO FILTER