

# SN54ALS323, SN74ALS323 8-BIT UNIVERSAL SHIFT/STORAGE REGISTERS WITH SYNCHRONOUS CLEAR AND 3-STATE OUTPUTS

SDAS267A – DECEMBER 1982 – REVISED DECEMBER 1994

- Multiplexed I/O Ports Provide Improved Bit Density
- Four Modes of Operation:
  - Hold (Store)
  - Shift Right
  - Shift Left
  - Load Data
- Operate With Outputs Enabled or at High Impedance
- 3-State Outputs Drive Bus Lines Directly
- Can Be Cascaded for n-Bit Word Lengths
- Synchronous Clear
- Applications:
  - Stacked or Push-Down Registers
  - Buffer Storage
  - Accumulator Registers
- Package Options Include Plastic Small-Outline (DW) Packages, Ceramic Chip Carriers (FK), and Standard Plastic (N) and Ceramic (J) 300-mil DIPs


## description

These 8-bit universal shift/storage registers feature multiplexed input/output (I/O) ports to achieve full 8-bit data handling in a 20-pin package. Two function-select ( $S_0$ ,  $S_1$ ) inputs and two output-enable ( $\overline{OE}1$ ,  $\overline{OE}2$ ) inputs can be used to choose the modes of operation listed in the function table.


Synchronous parallel loading is accomplished by taking both  $S_0$  and  $S_1$  high. This places the 3-state outputs in the high-impedance state and permits data applied on the I/O ports to be clocked into the register. Reading out of the register can be accomplished while the outputs are enabled in any mode. Clearing occurs synchronously when the clear ( $\overline{CLR}$ ) input is low. Taking either  $\overline{OE}1$  or  $\overline{OE}2$  high disables the outputs but has no effect on clearing, shifting, or storing data.

The SN54ALS323 is characterized for operation over the full military temperature range of  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The SN74ALS323 is characterized for operation from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ .

SN54ALS323 . . . J PACKAGE  
SN74ALS323 . . . DW OR N PACKAGE  
(TOP VIEW)

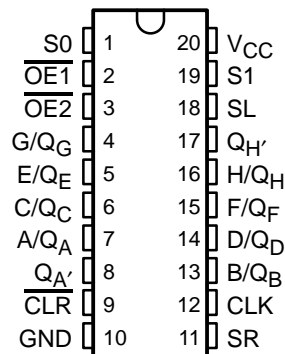

SN54ALS323 . . . FK PACKAGE  
(TOP VIEW)

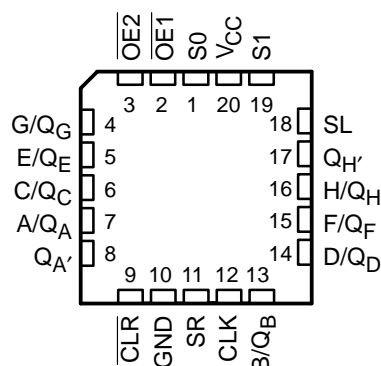

## SDAS267A – DECEMBER 1982 – REVISED DECEMBER 1994

MODE	INPUTS								I/O PORTS								OUTPUTS	
	CLR	S1	S0	OE1↑	OE2↑	CLK	SL	SR	A/QA	B/QB	C/QC	D/QD	E/QE	F/QF	G/QG	H/QH	QA'	QH'
Clear	L	X	L	L	L	↑	X	X	L	L	L	L	L	L	L	L	L	L
	L	L	X	L	L	↑	X	X	L	L	L	L	L	L	L	L	L	L
	L	H	H	X	X	↑	X	X	X	X	X	X	X	X	X	X	L	L
Hold	H	L	L	L	L	X	X	X	QA0	QB0	QC0	QD0	QE0	QF0	QG0	QH0	QA0	QH0
	H	X	X	L	L	L	X	X	QA0	QB0	QC0	QD0	QE0	QF0	QG0	QH0	QA0	QH0
Shift Right	H	L	H	L	L	↑	X	H	H	QAn	QBn	QCn	QDn	QEn	QFn	QGn	H	QGn
	H	L	H	L	L	↑	X	L	L	QAn	QBn	QCn	QDn	QEn	QFn	QGn	L	QGn
Shift Left	H	H	L	L	L	↑	H	X	QBn	QCn	QDn	QEn	QFn	QGn	QHn	H	QBn	H
	H	H	L	L	L	↑	L	X	QBn	QCn	QDn	QEn	QFn	QGn	QHn	L	QBn	L
Load	H	H	H	X	X	↑	X	X	a	b	c	d	e	f	g	h	a	h

† When one or both output-enable inputs are high, the eight I/O terminals are disabled to the high-impedance state; however, sequential operation or clearing of the register is not affected.

Pin diagram of the 74VHC163 4-bit binary counter. The diagram shows 18 pins with their functions and internal logic blocks. Pin 9 is CLR (active low). Pin 2 is OE1 (active low). Pin 3 is OE2 (active low). Pin 1 is S0. Pin 19 is S1. Pin 12 is CLK. Pin 11 is SR. Pin 7 is A/QA. Pin 13 is B/QB. Pin 6 is C/QC. Pin 14 is D/QD. Pin 5 is E/QE. Pin 15 is F/QF. Pin 4 is G/QG. Pin 16 is H/QH. Pin 18 is SL. Internal blocks include SRG8 (4R, &, 3EN13), a 4-to-1 MUX (0, 1, 0, 3), a 4-to-1 MUX (1, 4D, 3, 4D, 5, 13), a 4-to-1 MUX (3, 4D, 6, 13), and a 4-to-1 MUX (3, 4D, 12, 13).




# SN54ALS323, SN74ALS323

## 8-BIT UNIVERSAL SHIFT/STORAGE REGISTERS

### WITH SYNCHRONOUS CLEAR AND 3-STATE OUTPUTS

SDAS267A – DECEMBER 1982 – REVISED DECEMBER 1994

#### logic diagram (positive logic)

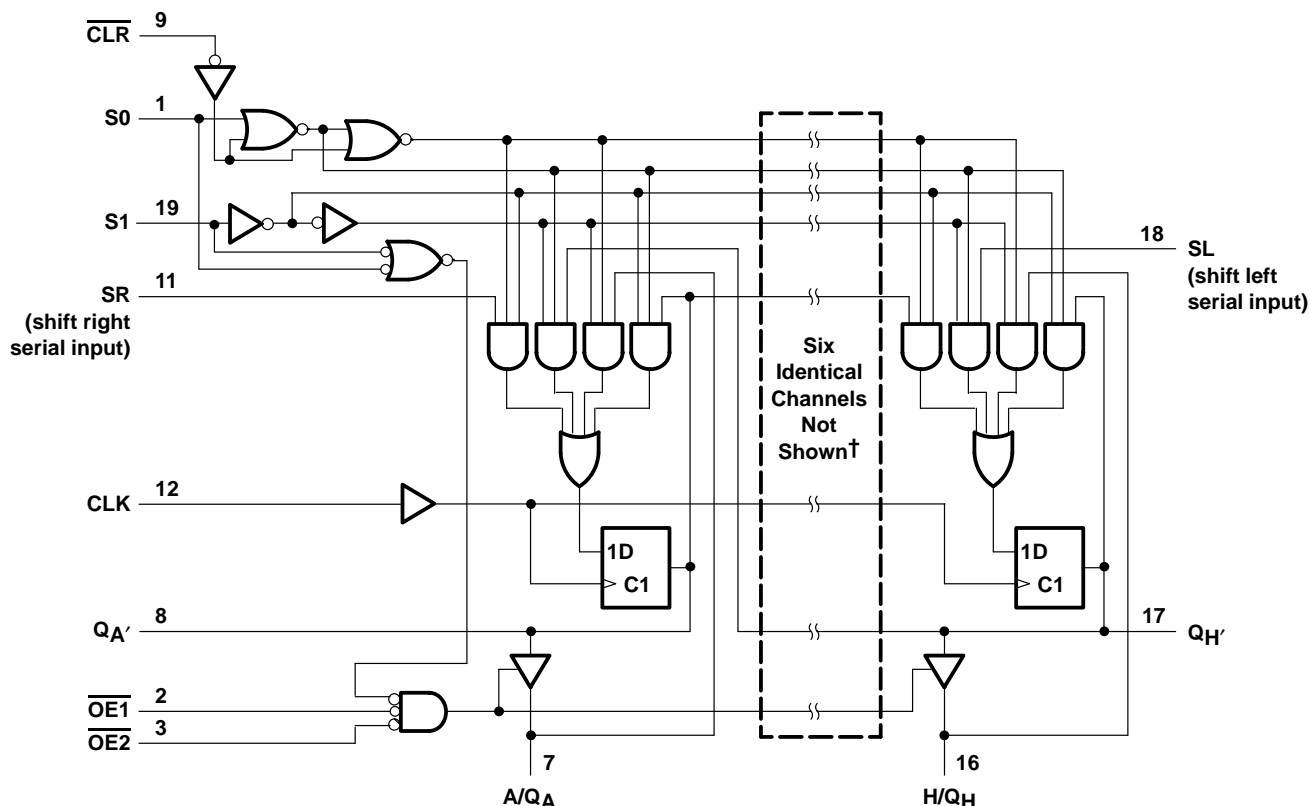

† I/O ports not shown: B/Q<sub>B</sub> (13), C/Q<sub>C</sub> (6), D/Q<sub>D</sub> (14), E/Q<sub>E</sub> (5), F/Q<sub>F</sub> (15), and G/Q<sub>G</sub> (4).

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)‡

Supply voltage, $V_{CC}$	7 V
Input voltage, $V_I$ : All inputs	7 V
I/O ports	5.5 V
Operating free-air temperature range, $T_A$ : SN54ALS323	–55°C to 125°C
SN74ALS323	0°C to 70°C
Storage temperature range	–65°C to 150°C

‡ Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

# SN54ALS323, SN74ALS323

## 8-BIT UNIVERSAL SHIFT/STORAGE REGISTERS

### WITH SYNCHRONOUS CLEAR AND 3-STATE OUTPUTS

SDAS267A – DECEMBER 1982 – REVISED DECEMBER 1994

#### recommended operating conditions

			SN54ALS323			SN74ALS323			UNIT	
			MIN	NOM	MAX	MIN	NOM	MAX		
V <sub>CC</sub>	Supply voltage		4.5	5	5.5	4.5	5	5.5	V	
V <sub>IH</sub>	High-level input voltage		2			2			V	
V <sub>IL</sub>	Low-level input voltage		0.7			0.8			V	
I <sub>OH</sub>	High-level output current	Q <sub>A</sub> ' or Q <sub>H</sub> '	−0.4			−0.4			mA	
		Q <sub>A</sub> thru Q <sub>H</sub>	−1			−2.6				
I <sub>OL</sub>	Low-level output current	Q <sub>A</sub> ' or Q <sub>H</sub> '	4			8			mA	
		Q <sub>A</sub> thru Q <sub>H</sub>	12			24				
T <sub>A</sub>	Operating free-air temperature		−55			0			70	°C

#### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		SN54ALS323			SN74ALS323			UNIT
				MIN	TYP†	MAX	MIN	TYP†	MAX	
$V_{IK}$		$V_{CC} = 4.5\text{ V}$ ,	$I_I = -18\text{ mA}$			-1.5			-1.5	V
$V_{OH}$	Any output	$V_{CC} = 4.5\text{ V to } 5.5\text{ V}$ ,	$I_{OH} = -0.4\text{ mA}$	$V_{CC} - 2$			$V_{CC} - 2$			V
	$Q_A$ thru $Q_H$	$V_{CC} = 4.5\text{ V}$	$I_{OH} = -1\text{ mA}$	2.4	3.3					
$V_{OL}$	$Q_A'$ or $Q_H'$	$V_{CC} = 4.5\text{ V}$	$I_{OL} = 4\text{ mA}$	0.25	0.4		0.25	0.4		V
			$I_{OL} = 8\text{ mA}$				0.35	0.5		
	$Q_A$ thru $Q_H$	$V_{CC} = 4.5\text{ V}$	$I_{OL} = 12\text{ mA}$	0.25	0.4		0.25	0.4		
			$I_{OL} = 24\text{ mA}$				0.35	0.5		
$I_I$	A thru H	$V_{CC} = 5.5\text{ V}$	$V_I = 5.5\text{ V}$			0.1			0.1	mA
	Any others		$V_I = 7\text{ V}$			0.1			0.1	
$I_{IH}^\ddagger$		$V_{CC} = 5.5\text{ V}$ ,	$V_I = 2.7\text{ V}$			20			20	µA
$I_{IL}^\ddagger$	S0, S1, SR, SL	$V_{CC} = 5.5\text{ V}$ ,	$V_I = 0.4\text{ V}$			-0.2			-0.2	mA
	Any others					-0.1			-0.1	
$I_{OS}^\S$	$Q_A'$ or $Q_H'$	$V_{CC} = 5.5\text{ V}$ ,	$V_O = 2.25\text{ V}$	-15		-70	-15		-70	mA
	$Q_A$ thru $Q_H$			-20		-112	-30		-112	
$I_{CC}$		$V_{CC} = 5.5\text{ V}$	Outputs high	15	28		15	28		mA
			Outputs low	22	38		22	38		
			Outputs disabled	23	40		23	40		

† All typical values are at  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

‡ For I/O ports ( $Q_A$  thru  $Q_H$ ), the parameters  $I_{IH}$  and  $I_{IL}$  include the off-state output current.

§ The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current,  $I_{OS}$ .

**SN54ALS323, SN74ALS323**  
**8-BIT UNIVERSAL SHIFT/STORAGE REGISTERS**  
**WITH SYNCHRONOUS CLEAR AND 3-STATE OUTPUTS**

SDAS267A – DECEMBER 1982 – REVISED DECEMBER 1994

**timing requirements over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)**

				SN54ALS323		SN74ALS323		UNIT
				MIN	MAX	MIN	MAX	
f <sub>clock</sub>	Clock frequency (at 50% duty cycle)			0	17	0	17	MHz
t <sub>w</sub>	Pulse duration		CLK high or low	22		16.5		ns
t <sub>su</sub>	Setup time before CLK↑	S0 or S1		25		20		ns
		Serial or parallel data	High	18		16		
			Low	15		6		
		CLR active		25		20		
	Inactive-state setup time before CLK↑†	CLR		18		16		
t <sub>h</sub>	Hold time after CLK↑		S0 or S1		0		ns	
			Serial or parallel data		0			

<sup>†</sup> Inactive-state setup time is also referred to as recovery time.

**switching characteristics (see Figure 1)**

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub> = 4.5 V to 5.5 V, C <sub>L</sub> = 50 pF, R <sub>1</sub> = 500 Ω, R <sub>2</sub> = 500 Ω, T <sub>A</sub> = MIN to MAX‡				UNIT
			SN54ALS323		SN74ALS323		
			MIN	MAX	MIN	MAX	
f <sub>max</sub>			17		17		MHz
t <sub>PLH</sub>	CLK	Q <sub>A</sub> thru Q <sub>H</sub>	2	19	4	13	ns
t <sub>PHL</sub>			4	25	7	19	
t <sub>PLH</sub>	CLK	Q <sub>A</sub> ' or Q <sub>H</sub> '	2	21	5	15	ns
t <sub>PHL</sub>			4	25	8	18	
t <sub>PZH</sub>	$\overline{\text{OE1}}, \overline{\text{OE2}}$	Q <sub>A</sub> thru Q <sub>H</sub>	5	22	6	16	ns
t <sub>PZL</sub>			6	27	8	22	
t <sub>PZH</sub>	S0, S1	Q <sub>A</sub> thru Q <sub>H</sub>	5	27	7	17	ns
t <sub>PZL</sub>			6	27	8	22	
t <sub>PHZ</sub>	$\overline{\text{OE1}}, \overline{\text{OE2}}$	Q <sub>A</sub> thru Q <sub>H</sub>	1	15	1	8	ns
t <sub>PLZ</sub>			4	38	5	15	
t <sub>PHZ</sub>	S0, S1	Q <sub>A</sub> thru Q <sub>H</sub>	1	16	1	12	ns
t <sub>PLZ</sub>			4	34	8	25	

<sup>‡</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

# SN54ALS323, SN74ALS323


## 8-BIT UNIVERSAL SHIFT/STORAGE REGISTERS

### WITH SYNCHRONOUS CLEAR AND 3-STATE OUTPUTS

SDAS267A – DECEMBER 1982 – REVISED DECEMBER 1994

#### PARAMETER MEASUREMENT INFORMATION

#### SERIES 54ALS/74ALS AND 54AS/74AS DEVICES

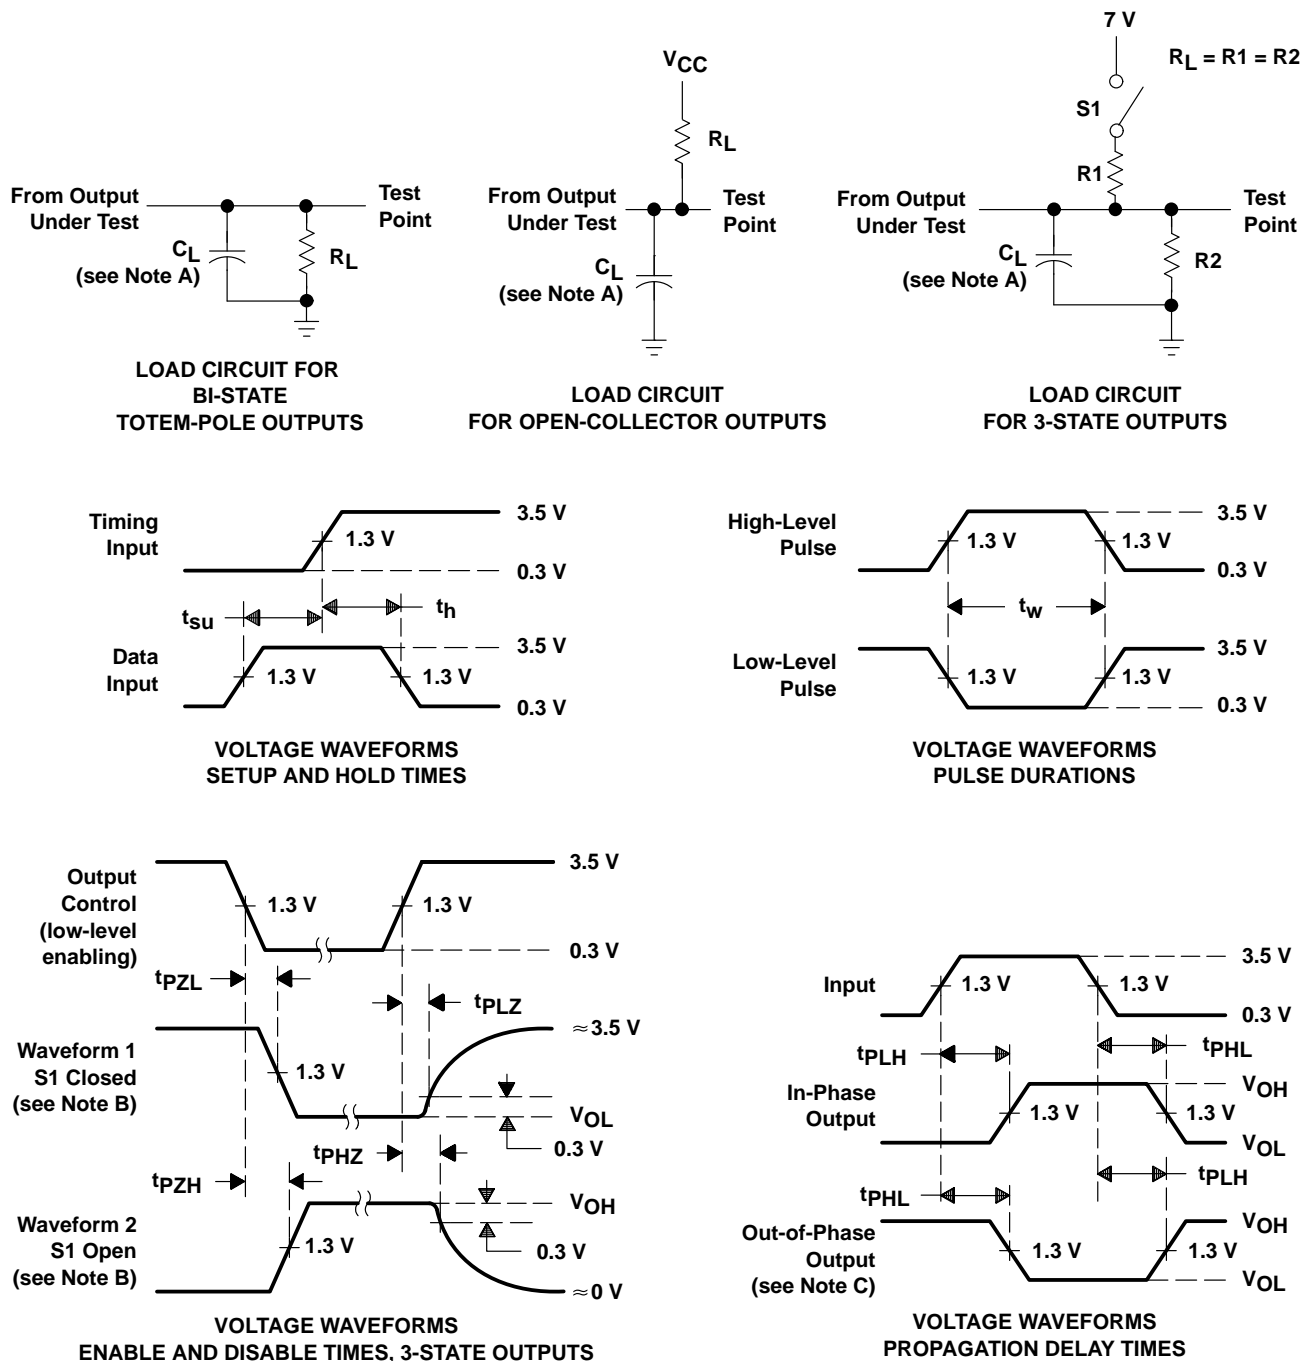

- NOTES:
- A.  $C_L$  includes probe and jig capacitance.
  - B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
  - C. When measuring propagation delay items of 3-state outputs, switch S1 is open.
  - D. All input pulses have the following characteristics:  $PRR \leq 1$  MHz,  $t_r = t_f = 2$  ns, duty cycle = 50%.
  - E. The outputs are measured one at a time with one transition per measurement.

Figure 1. Load Circuits and Voltage Waveforms

## **IMPORTANT NOTICE**

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

**TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.**

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.