

SN74F2244

25-Ω OCTAL BUFFER/DRIVER WITH 3-STATE OUTPUTS

SDFS095B – NOVEMBER 1993 – REVISED JANUARY 1996

- 3-State Outputs Drive Bus Lines or Buffer-Memory Address Registers
- Package Options Include Plastic Small-Outline (DW) Packages and Standard Plastic (N) 300-mil DIPs


description

This octal buffer and line driver is designed specifically to improve both the performance and density of 3-state memory address drivers, clock drivers, and bus-oriented receivers and transmitters.

The 25-Ω resistors in the lower output circuit reduce ringing and eliminate the need for external resistors.

The SN74F2244 is characterized for operation from 0°C to 70°C.

DW OR N PACKAGE
(TOP VIEW)

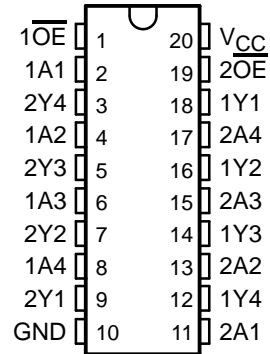

FUNCTION TABLE
(each buffer)

| INPUTS | | OUTPUT Y |
|------------------------|---|-------------|
| $\overline{\text{OE}}$ | A | |
| L | H | H |
| L | L | L |
| H | X | Z |



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.


PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


Copyright © 1996, Texas Instruments Incorporated

logic symbol†

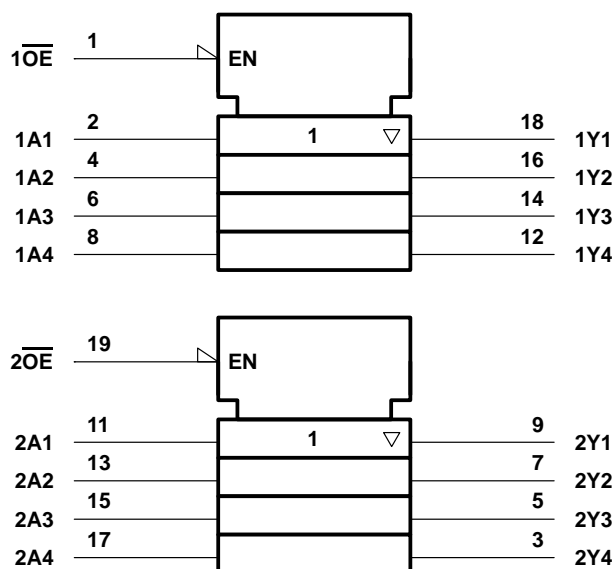

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagram (positive logic)

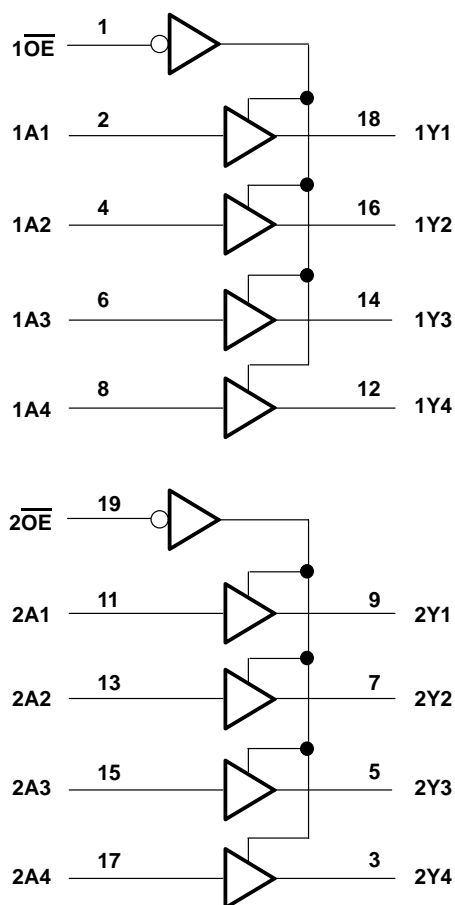

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)‡

| | |
|---|--------------------|
| Supply voltage range, V_{CC} | –0.5 V to 7 V |
| Input voltage range, V_I (see Note 1) | –1.2 V to 7 V |
| Input current range, I_I | –30 mA to 5 mA |
| Voltage range applied to any output in the disabled or power-off state, V_O | –0.5 V to 5.5 V |
| Voltage range applied to any output in the high state, V_O | –0.5 V to V_{CC} |
| Current into any output in the low state, I_O | 30 mA |
| Operating free-air temperature range, T_A | 0°C to 70°C |
| Storage temperature range, T_{stg} | –65°C to 150°C |

‡ Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The input voltage ratings may be exceeded if the input current ratings are observed.

SN74F2244
25-Ω OCTAL BUFFER/DRIVER
WITH 3-STATE OUTPUTS

SDFS095B – NOVEMBER 1993 – REVISED JANUARY 1996

recommended operating conditions

| | | MIN | NOM | MAX | UNIT |
|-----------------|--------------------------------|-----|-----|------|------|
| V _{CC} | Supply voltage | 4.5 | 5 | 5.5 | V |
| V _{IH} | High-level input voltage | 2 | | | V |
| V _{IL} | Low-level input voltage | | | 0.8 | V |
| I _{IK} | Input clamp current | | | – 18 | mA |
| I _{OH} | High-level output current | | | – 15 | mA |
| I _{OL} | Low-level output current | | | 12 | mA |
| T _A | Operating free-air temperature | 0 | | 70 | °C |

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | TEST CONDITION† | MIN | TYP† | MAX | UNIT |
|-------------------|--|------------------|------|-------|------|
| V _{IK} | V _{CC} = 4.5 V, I _I = – 18 mA | | | – 1.2 | V |
| V _{OH} | V _{CC} = 4.5 V, I _{OH} = – 3 mA | 2.4 | 2.8 | | V |
| | V _{CC} = 4.5 V, I _{OH} = – 15 mA | 2 | 2.3 | | |
| | V _{CC} = 4.75 V, I _{OH} = – 3 mA | 2.7 | | | |
| V _{OL} | V _{CC} = 4.5 V, I _{OL} = 1 mA | 0.2 | 0.5 | | V |
| | V _{CC} = 4.5 V, I _{OL} = 12 mA | 0.5 | 0.75 | | |
| I _I | V _{CC} = 5.5 V, V _I = 0.5 V | | | 0.1 | mA |
| I _{OZH} | V _{CC} = 5.5 V, V _O = 7 V | | | 50 | μA |
| I _{OZL} | V _{CC} = 5.5 V, V _O = 2.7 V | | | – 50 | μA |
| I _{IH} | V _{CC} = 5.5 V, V _I = 2.7 V | | | 20 | μA |
| I _{IL} | Any $\overline{\text{OE}}$ input | | | – 1 | mA |
| | Any A input | | | – 1.6 | |
| I _{OS} ‡ | V _{CC} = 5.5 V, V _O = 0 | – 100 | | – 225 | mA |
| I _{CC} | V _{CC} = 5.5 V, Outputs open | Outputs high | | 40 | mA |
| | | Outputs low | | 60 | |
| | | Outputs disabled | | 60 | |

† All typical values are at V_{CC} = 5 V, T_A = 25°C.


‡ Not more than one output should be shorted at a time, and the duration of the short circuit should not exceed one second.

switching characteristics (see Figure 1)


| PARAMETER | FROM (INPUT) | TO (OUTPUT) | V _{CC} = 5 V, C _L = 50 PF, R ₁ = 500 Ω, R ₂ = 500 Ω, T _A = 25°C | | V _{CC} = 4.5 V TO 5.5 V, C _L = 50 PF, R ₁ = 500 Ω, R ₂ = 500 Ω, T _A = MIN TO MAX§ | | UNIT |
|------------------|------------------------|-------------|--|------|--|-----|------|
| | | | MIN | MAX | MIN | MAX | |
| t _{PLH} | A | Y | 1.5 | 7 | 1.5 | 7 | ns |
| t _{PHL} | | | 2.5 | 8 | 2 | 8 | |
| t _{PZH} | $\overline{\text{OE}}$ | Y | 1.5 | 9 | 1 | 9.5 | ns |
| t _{PZL} | | | 2.5 | 11.5 | 2.5 | 12 | |
| t _{PHZ} | $\overline{\text{OE}}$ | Y | 1.5 | 9 | 1 | 9.5 | ns |
| t _{PLZ} | | | 1.5 | 8.5 | 1.5 | 9.5 | |

§ For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.


PARAMETER MEASUREMENT INFORMATION

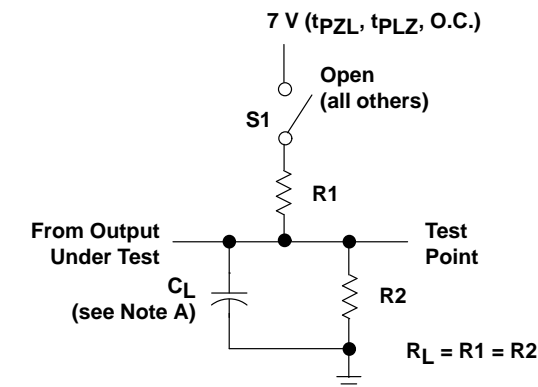


LOAD CIRCUIT FOR 3-STATE AND OPEN-COLLECTOR OUTPUTS

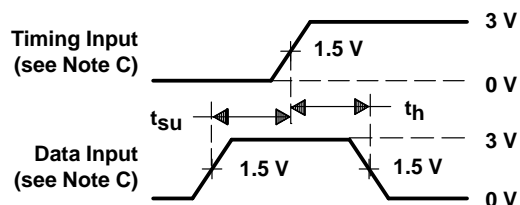


VOLTAGE WAVEFORMS SETUP AND HOLD TIMES

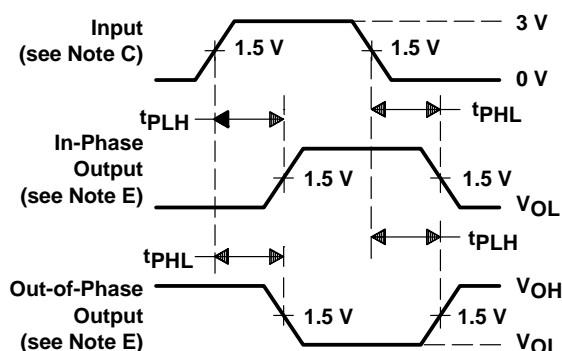


VOLTAGE WAVEFORMS PROPAGATION DELAY TIMES (see Note D)

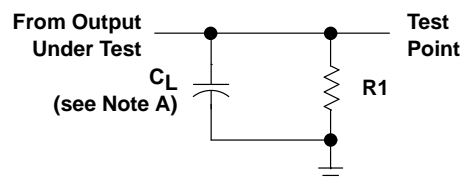

LOAD CIRCUIT FOR TOTEM-POLE OUTPUTS

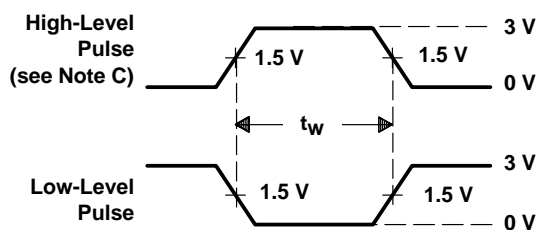

VOLTAGE WAVEFORMS PULSE DURATION

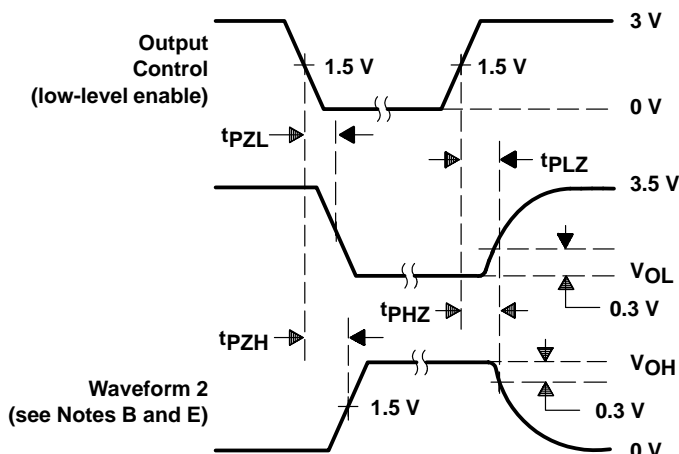

VOLTAGE WAVEFORMS ENABLE AND DISABLE TIMES, 3-STATE OUTPUTS

- NOTES: A. C_L includes probe and jig capacitance.
 B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
 C. All input pulses are supplied by generators having the following characteristics: $PRR \leq 1$ MHz, $t_r = t_f \leq 2.5$ ns, duty cycle = 50%.
 D. When measuring propagation delay times of 3-state outputs, switch S1 is open.
 E. The outputs are measured one at a time with one transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.