

**ST1803DHI**

HIGH VOLTAGE FAST-SWITCHING NPN POWER TRANSISTOR



- NEW SERIES, ENHANCED PERFORMANCE
- FULLY INSULATED PACKAGE FOR EASY MOUNTING
- INTEGRATED FREE WHEELING DIODE
- HIGH VOLTAGE CAPABILITY
- HIGH SWITCHING SPEED
- TIGHTER h_{FE} CONTROL
- IMPROVED RUGGEDNESS

APPLICATIONS:

- HORIZONTAL DEFLECTION FOR COLOR TV

DESCRIPTION

The ST1803DHI is manufactured using collector diffused technology for more stable operation Vs base drive circuit variations resulting in very low worst case dissipation.

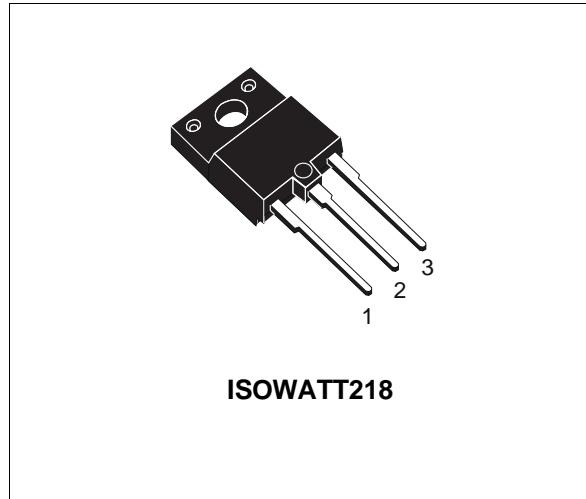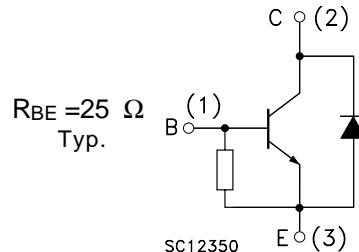**INTERNAL SCHEMATIC DIAGRAM****ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage ($I_E = 0$)	1500	V
V_{CEO}	Collector-Emitter Voltage ($I_B = 0$)	600	V
V_{EBO}	Emitter-Base Voltage ($I_C = 0$)	7	V
I_C	Collector Current	8	A
I_{CM}	Collector Peak Current ($t_p < 5 \text{ ms}$)	15	A
I_B	Base Current	4	A
P_{tot}	Total Dissipation at $T_c = 25^\circ\text{C}$	50	W
T_{stg}	Storage Temperature	-65 to 150	°C
T_j	Max. Operating Junction Temperature	150	°C

ST1803DHI

THERMAL DATA


$R_{thj-case}$	Thermal Resistance Junction-case	Max	2.5	$^{\circ}\text{C/W}$
----------------	----------------------------------	-----	-----	----------------------

ELECTRICAL CHARACTERISTICS ($T_{case} = 25 \text{ }^{\circ}\text{C}$ unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CES}	Collector Cut-off Current ($V_{BE} = 0$)	$V_{CE} = 1500 \text{ V}$ $V_{CE} = 1500 \text{ V}$ $T_j = 125 \text{ }^{\circ}\text{C}$			1 2	mA mA
I_{EBO}	Emitter Cut-off Current ($I_C = 0$)	$V_{EB} = 4 \text{ V}$	130		400	mA
$V_{CE(sat)*}$	Collector-Emitter Saturation Voltage	$I_C = 4 \text{ A}$ $I_B = 0.8 \text{ A}$ $I_C = 4 \text{ A}$ $I_B = 1.2 \text{ A}$		3	5 1.5	V
$V_{BE(sat)*}$	Base-Emitter Saturation Voltage	$I_C = 4 \text{ A}$ $I_B = 0.8 \text{ A}$			1.2	V
$h_{FE}*$	DC Current Gain	$I_C = 4.5 \text{ A}$ $V_{CE} = 5 \text{ V}$ $I_C = 1 \text{ A}$ $V_{CE} = 5 \text{ V}$	4 10	15	9 20	
V_F	Diode Forward Voltage	IF = 5 A		1.5	2	V
BV_{EB0}	Emitter-Breakdown Voltage	IE = 700 mA	7			V
t_s t_f	INDUCTIVE LOAD Storage Time Fall Time	$I_C = 4 \text{ A}$ $I_{BON(END)} = 0.8 \text{ A}$ $L_B = 5 \mu\text{H}$ $V_{BB} = -2.5 \text{ V}$ $f = 16 \text{ KHz}$		5 0.3	6 0.6	μs μs

* Pulsed: Pulse duration = 300 μs , duty cycle 1.5 %


Safe Operating Areas

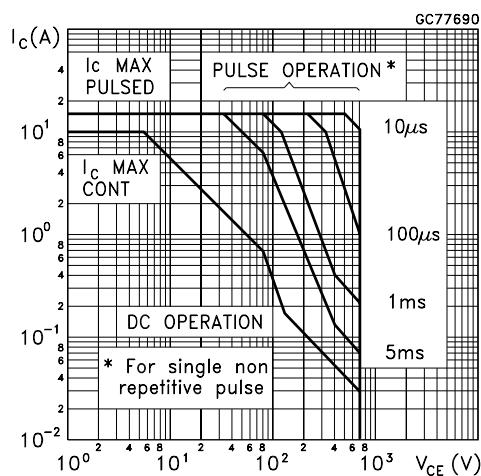


Thermal Impedance

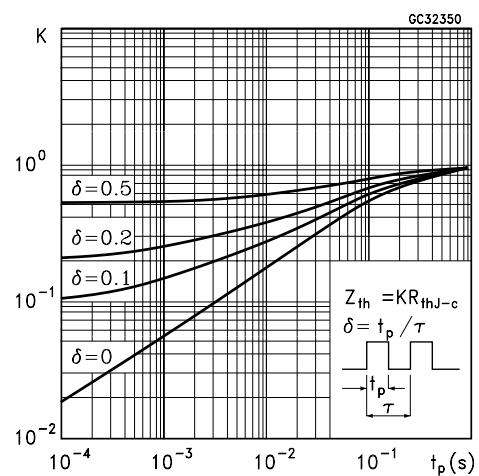


Derating Curve

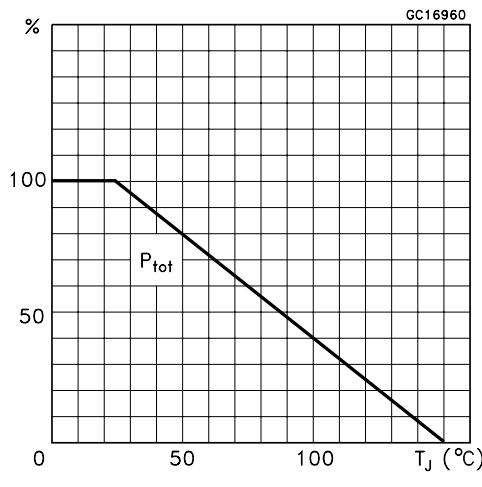


Biase Emitter Saturation Voltage

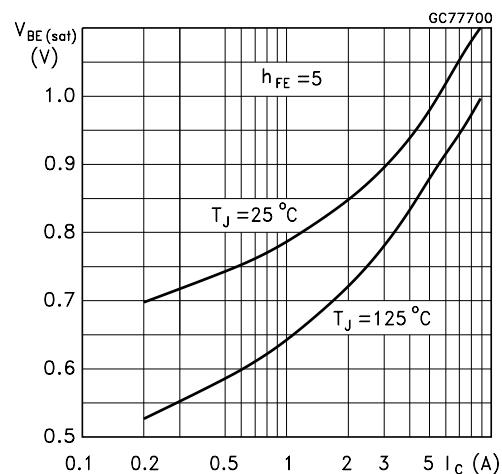


Collector Emitter Saturation Voltage

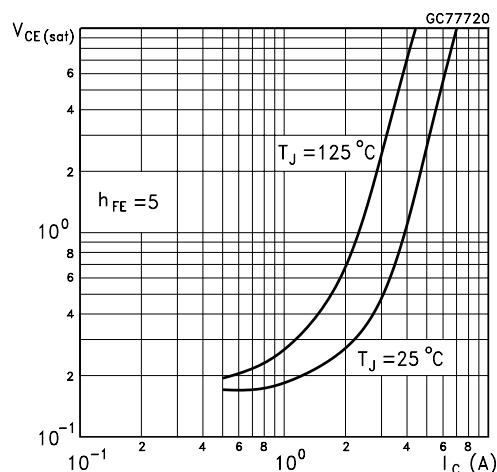


DC Current Gain

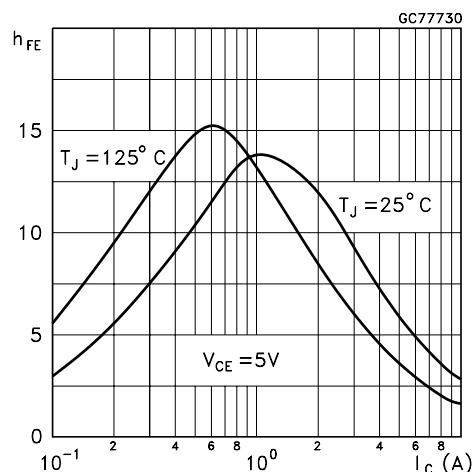

Power Losses At 16 KHz

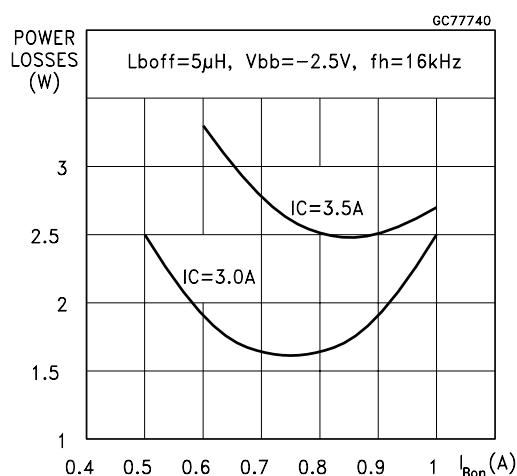


Switching Time Inductive Load

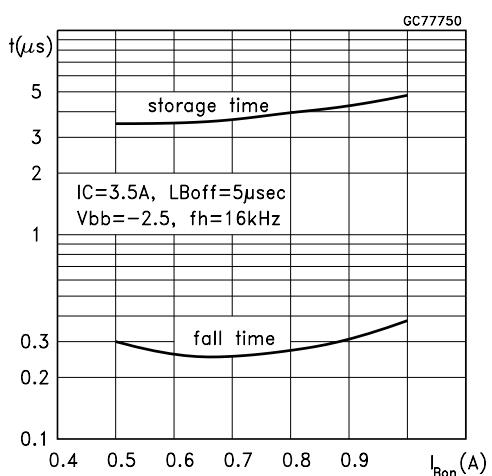


ST1803DHI

Reverse Biased SOA

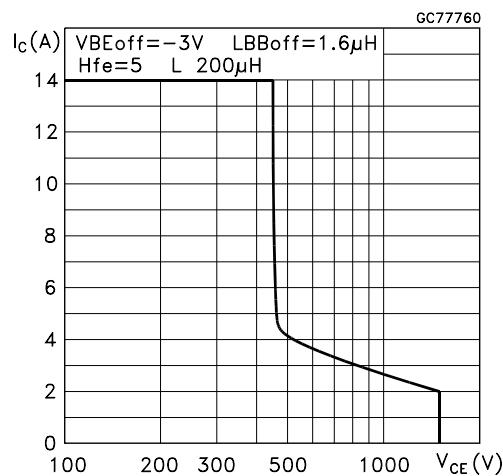


Inductive Load Switching Test Circuits.

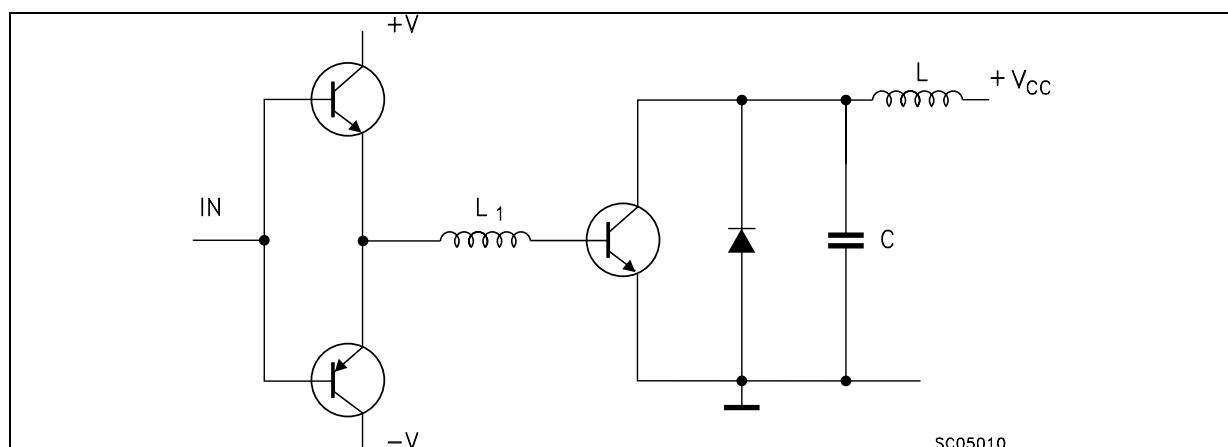

ISOWATT218 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	5.35		5.65	0.210		0.222
C	3.3		3.8	0.130		0.149
D	2.9		3.1	0.114		0.122
D1	1.88		2.08	0.074		0.081
E	0.75		1	0.029		0.039
F	1.05		1.25	0.041		0.049
G	10.8		11.2	0.425		0.441
H	15.8		16.2	0.622		0.637
L1	20.8		21.2	0.818		0.834
L2	19.1		19.9	0.752		0.783
L3	22.8		23.6	0.897		0.929
L4	40.5		42.5	1.594		1.673
L5	4.85		5.25	0.190		0.206
L6	20.25		20.75	0.797		0.817
M	3.5		3.7	0.137		0.145
N	2.1		2.3	0.082		0.090
U		4.6			0.181	

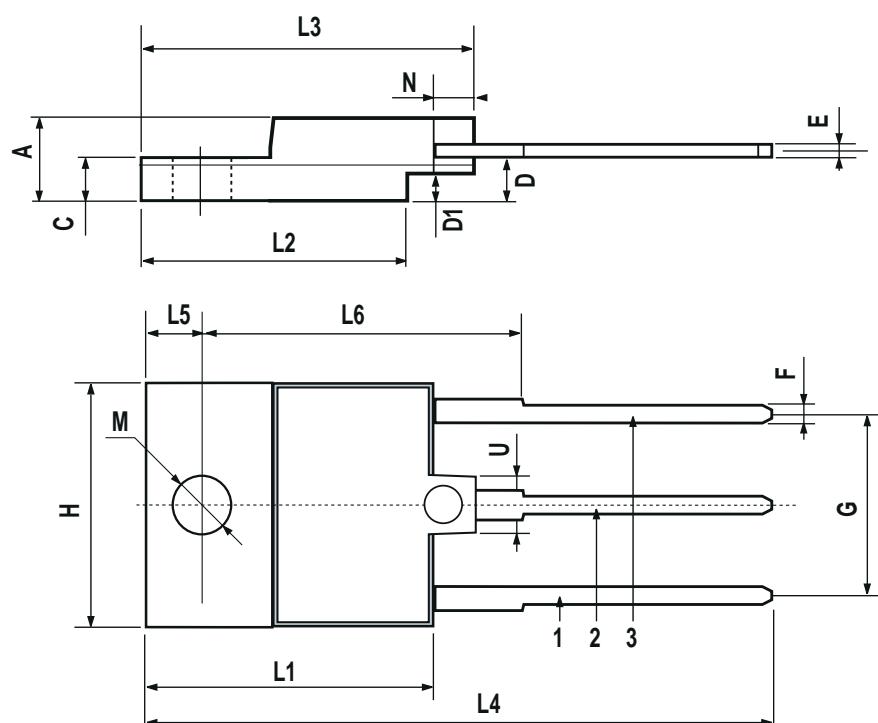

P025C

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 1998 STMicroelectronics – Printed in Italy – All Rights Reserved
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.