# **5-Bit Magnitude Comparator**

The MC10166 is a high speed expandable 5—bit comparator for comparing the magnitude of two binary words. Two outputs are provided: A < B and A > B. A = B can be obtained by NORing the two outputs with an additional gate. A high level on the enable function forces both outputs low. Multiple MC10166s may be used for larger word comparisons.


 $P_D = 440$  mW typ/pkg (No Load)  $t_{pd} = \underline{D}$ ata to output 6.0 ns typ E to output 2.5 ns typ  $t_r$ ,  $t_f = 2.0$  ns typ (20%–80%)

# A4 9 B4 10 A3 12 B3 11 A2 13 B2 14 A1 6 B1 7 A0 5 B0 4 E 15


### **TRUTH TABLE**

	Inputs	Outputs			
E	АВ		A < B	A > B	
Н	Х	Х	L	L	
L	Word A =	Word B	L	L	
L	Word A >	Word B	L	Н	
L	Word A <	Word B	Н	L	

# MC10166



### DIP PIN ASSIGNMENT



Pin assignment is for Dual–in–Line Package.
For PLCC pin assignment, see the Pin Conversion
Tables on page 6–11 of the Motorola MECL Data
Book (DL122/D).

# **ELECTRICAL CHARACTERISTICS**

			Test Limits							
		Pin Under Test	-30°C		+25°C			+85°C		1
Characteristic	Symbol		Min	Max	Min	Тур	Max	Min	Max	Unit
Power Supply Drain Current	ΙΕ	8		117		85	106		117	mAdc
Input Current	l <sub>inH</sub>	5		350			220		220	μAdc
	l <sub>inL</sub>	5	0.5		0.5			0.3		μAdc
Output Voltage Logic 1	Vон	2 3	-1.060 -1.060	-0.890 -0.890	-0.960 -0.960		-0.810 -0.810	-0.890 -0.890	-0.700 -0.700	Vdc
Output Voltage Logic 0	VOL	2 3	-1.890 -1.890	-1.675 -1.675	-1.850 -1.850		-1.650 -1.650	-1.825 -1.825	-1.615 -1.615	Vdc
Threshold Voltage Logic 1	VOHA	2 3	-1.080 -1.080		-0.980 -0.980			-0.910 -0.910		Vdc
Threshold Voltage Logic 0	VOLA	2 3		-1.655 -1.655			-1.630 -1.630		-1.595 -1.595	Vdc
Switching Times (50Ω Load)										ns
Propagation Data to Output Delay	t9+2+ t9-2- t11-2+ t11+2- t7+3+ t7-3-	2 2 2 2 2 3 3	1.0 1.0 1.0 1.0 1.0	8.0 8.0 8.0 8.0 8.0	1.0 1.0 1.0 1.0 1.0	6.0 6.0 6.0 6.0 6.0	7.6 7.6 7.6 7.6 7.6 7.6	1.0 1.0 1.0 1.0 1.0	8.4 8.4 8.4 8.4 8.4	
Enable to Output	t <sub>15-3+</sub> t <sub>15+3-</sub>	3 3	1.0 1.0	3.8 3.8	1.0 1.0	2.5 2.5	3.6 3.6	1.0 1.0	4.0 4.0	
Rise Time (20 to 80%)	t <sub>2+</sub>	2	1.0	3.6	1.1	2.0	3.5	1.1	3.8	
Fall Time (20 to 80%)	t <sub>2</sub> _	2	1.0	3.6	1.1	2.0	3.5	1.1	3.8	

MOTOROLA 3–94

## **ELECTRICAL CHARACTERISTICS** (continued)

		TEST VOLTAGE VALUES (Vo			ES (Volts)				
		@ Test Te	mperature	V <sub>IHmax</sub>	V <sub>ILmin</sub>	VIHAmin	V <sub>ILAmax</sub>	VEE	
			–30°C	-0.890	-1.890	-1.205	-1.500	-5.2	
			+25°C	-0.810	-1.850	-1.105	-1.475	-5.2	
			+85°C	-0.700	-1.825	-1.035	-1.440	-5.2	
			Pin	TEST	TEST VOLTAGE APPLIED TO PINS LISTED BELOW				
Characteristic		Symbol	Under Test	V <sub>IHmax</sub>	V <sub>ILmin</sub>	V <sub>IHAmin</sub>	V <sub>ILAmax</sub>	VEE	(V <sub>CC</sub> ) Gnd
Power Supply Drain	Current	ΙE	8		4,7,10,11,14			8	1, 16
Input Current		linH	5	5				8	1, 16
		l <sub>inL</sub>	5		5			8	1, 16
Output Voltage	Logic 1	Voн	2 3	5 4				8 8	1, 16 1, 16
Output Voltage	Logic 0	VOL	2 3	5, 15 4, 15				8 8	1, 16 1, 16
Threshold Voltage	Logic 1	Vона	2 3	5 4			15 15	8 8	1, 16 1, 16
Threshold Voltage	Logic 0	VOLA	2 3	5 4		15 15		8 8	1, 16 1, 16
Switching Times	(50Ω Load)			+1.11V		Pulse In	Pulse Out	-3.2 V	+2.0
Propagation Delay	Data to Output	t9+2+ t9-2- t11-2+ t11+2- t7+3+ t7-3-	2 2 2 2 3 3	12 12 6 6		9 9 11 11 7 7	2 2 2 2 3 3	8 8 8 8 8	1, 16 1, 16 1, 16 1, 16 1, 16 1, 16
	Enable to Output	t <sub>15-3+</sub> t <sub>15+3-</sub>	3 3	10 10		15 15	3 3	8 8	1, 16 1, 16
Rise Time	(20 to 80%)	t <sub>2+</sub>	2			9	2	8	1, 16
Fall Time	(20 to 80%)	t <sub>2-</sub>	2			9	2	8	1, 16

Each MECL 10,000 series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear fpm is maintained. Outputs are terminated through a 50–ohm resistor to –2.0 volts. Test procedures are shown for only one gate. The other gates are tested in the same manner.

3–95 MOTOROLA

### **APPLICATION INFORMATION**

### FIGURE 1 — 9-BIT MAGNITUDE **COMPARATOR** A2 B2 A3 B3 A4 B4 B5 A6 B6 A7 B7 A8 B8 B24 B4 A4 B3 АЗ B0 В1 B2 ВЗ В1 B2 ВЗ B23 A3 A < B A23 MC10166 MC10166 B22 B<sub>2</sub> A22 A2 A > BA < BA > BA < BB21 B1 A > BA21 Α1 B20 B0 A20 B19 B4 A19 B18 **B**3 A < BA18 A3 A>R A<B B17 B2 A17 A2 For 9-Bit Word B16 B1 A > BA16 Α1 B15 RΩ A15 A0 B14 B4 B4 A14 -B13 A4 A = BA4 B3 В3 А3 A13 A < BA3 A < B A < BB12 B2 B2 A12 Α2 A2 A > BB11 B1 A > BB1 A > B A11 Α1 Α1 B10 B0 B0 A10 Α0 A0 Α9 A4 В3 Α8 A3 A < B B2 Α7 A2 A > BB6 B1 A6 B0 A5 For longer word lengths, the MC10166 can be serially A4 A4 В3 АЗ A3 A < BB2 B2 A2 A2 B1 A > BB1 Α1

FIGURE 2 — 25-BIT MAGNITUDE COMPARATOR

B0

A0


The MC10166 compares the magnitude of two 5-bit words. Two outputs are provided which give a high level for A > B and A < B. The A = B function can be obtained by wire-ORing these outputs (a low level indicates A = B) or by NORing the outputs (a high level indicates A = B).

expanded or cascaded. Figure 1 shows two devices in a serial expansion for a 9-bit word length. The A > B and A < B outputs are fed to the A0 and B0 inputs respectively of the next device. The connection for an A = B output is also shown. The worst case delay time of serial expansion is equal to the number of comparators times the data-to-output delay.


For shorter delay times than possible with serial expansion, devices can be cascaded. Figure 2 shows a 25-bit cascaded comparator whose worst case delay is two data-to-output delays. The cascaded scheme can be extended to longer word lengths.

MOTOROLA 3-96

### **OUTLINE DIMENSIONS**

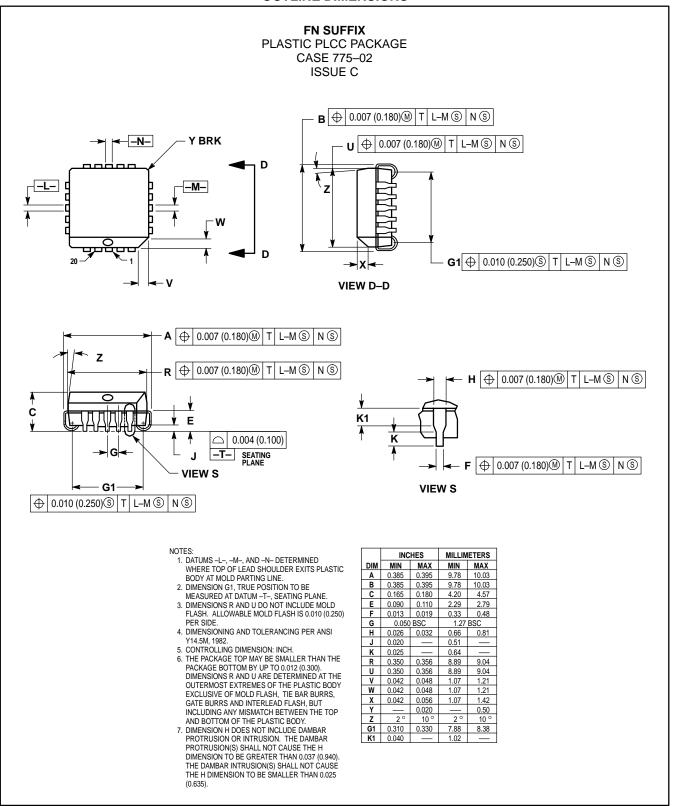


### **OUTLINE DIMENSIONS**

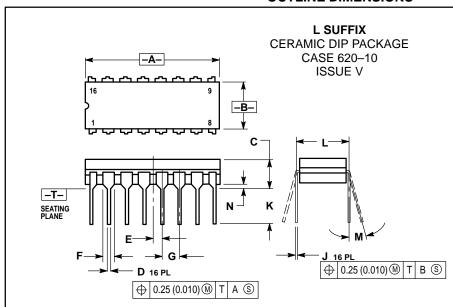

### NOTES:

- DIMENSIONING AND TOLERANCING PER
- ANSI Y14.5M, 1982. CONTROLLING DIMENSION: INCH.
- DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
- DIMENSION F MAY NARROW TO 0.76 (0.030) WHERE THE LEAD ENTERS THE CERAMIC

	INC	HES	MILLIMETERS		
DIM	MIN MAX		MIN	MAX	
Α	0.750	0.785	19.05	19.93	
В	0.240	0.295	6.10	7.49	
С		0.200		5.08	
D	0.015 0.020		0.39	0.50	
Е	0.050	BSC	1.27 BSC		
F	0.055	0.065	1.40	1.65	
G	0.100 BSC		2.54 BSC		
Н	0.008	0.015	0.21	0.38	
K	0.125	0.170	3.18	4.31	
L	0.300	BSC	7.62 BSC		
M	0°	15°	0 °	15°	
N	0.020	0.040	0.51	1.01	

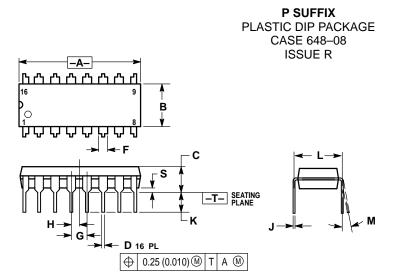

- NOTES:
  1. DIMENSIONING AND TOLERANCING PER ANSI
- Y14.5M, 1982. CONTROLLING DIMENSION: INCH.
- DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL
- DIMENSION B DOES NOT INCLUDE MOLD FLASH.
- ROUNDED CORNERS OPTIONAL

	INC	HES	MILLIMETERS			
DIM	MIN MAX		MIN	MAX		
Α	0.740	0.770	18.80	19.55		
В	0.250	0.270	6.35	6.85		
С	0.145	0.175	3.69	4.44		
D	0.015	0.021	0.39	0.53		
F	0.040	0.70	1.02	1.77		
G	0.100 BSC		2.54 BSC			
Н	0.050 BSC		1.27 BSC			
J	0.008	0.015	0.21	0.38		
K	0.110	0.130	2.80	3.30		
L	0.295	0.305	7.50	7.74		
М	0°	10 °	0°	10 °		
S	0.020	0.040	0.51	1.01		

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typical parameters, including or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and (A) are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

### How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 5405, Denver, Colorado 80217. 303-675-2140 or 1-800-441-2447

Mfax™: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609 INTERNET: http://Design-NET.com

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 81-3-3521-8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298



MC10166/D