

The RF Line

750 MHz CATV


Feedforward Amplifier

Designed for broadband applications requiring low-distortion amplification. Specifically intended for CATV market requirements. Two hybrid amplifiers along with couplers and delay lines are packaged together to provide extremely low distortion products at conventional CATV amplifier output levels.

- Specifically Designed to Provide Improved Performance in 750 MHz CATV Applications
- Distortion Components Reduced more than 20 dB from Conventional CATV Hybrid Amplifiers
- Specified for 110 Channel Performance
- Fully Shielded Metal Package

MFF424B

24 dB
40–750 MHz
110 CHANNEL
CATV FEEDFORWARD
AMPLIFIER



CASE 825A-03, STYLE 2

MAXIMUM RATINGS


Rating	Symbol	Value	Unit
Supply Voltage	V_{CC}	28	V
RF Input Power	P_{in}	+55	dBmV
Storage Temperature Range	T_{stg}	–40 to +100	°C
Operating Case Temperature Range	T_C	–20 to +100	°C

ELECTRICAL CHARACTERISTICS ($T_C = 50^\circ\text{C}$, $V_{CC} = 24\text{ V}$, 75 Ω System)

Characteristic	Symbol	Min	Typ	Max	Unit
Frequency Range	BW	40	—	750	MHz
Power Gain — 50 MHz	G_p	23.4	24	24.6	dB
Slope	S	+0.4	+0.9	+1.4	dB
Gain Flatness	—	—	—	± 0.3	dB
Return Loss — Input	IRL	18	—	—	dB
Return Loss — Output	ORL	18	—	—	dB
Composite Triple Beat ($V_{out} = +44\text{ dBmV}$ at ch. 2 to ch. M73) (9 dB Up slope, $V_{out} = +46\text{ dBmV}$ at ch. M73)	CTB ₁₁₀ flat CTB ₁₁₀ slope	— —	— –70	–68 —	dB
Composite Second Order Beat ($V_{out} = +44\text{ dBmV}$ at ch. 2 to ch. M73) (9 dB Up slope, $V_{out} = +46\text{ dBmV}$ at ch. M73)	CSO ₁₁₀ flat CSO ₁₁₀ slope	— —	— –72	–70 —	dB
Noise Figure (f = 50 MHz) (f = 750 MHz)	NF	—	—	9.0 13.0	dB
DC Current	I_{DC}	—	660	725	mA

PERFORMANCE DERATE versus TEMPERATURE (TYP)

Symbol	Characteristic	Test Conditions	–20 + 80°C	–20 + 100°C
ΔG_p	Change in Gain w/Temp.	50 MHz	$\pm 0.5\text{ dB}$	$\pm 0.6\text{ dB}$

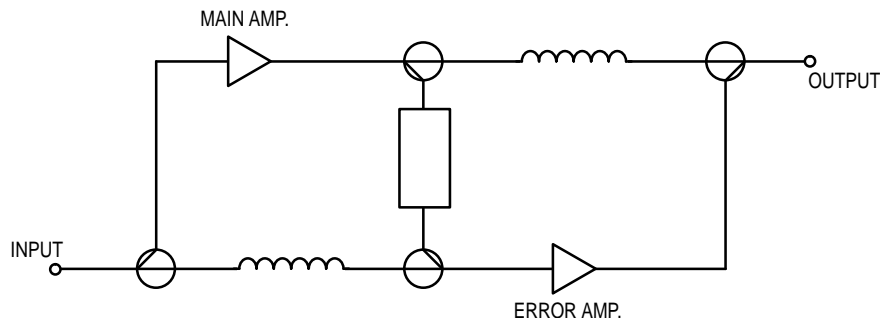


PERFORMANCE MEASUREMENT

Motorola test fixture: P/N FF124BTF is necessary for accurate measurement.

Figure 1. Block Diagram of Circuit

PACKAGE DIMENSIONS

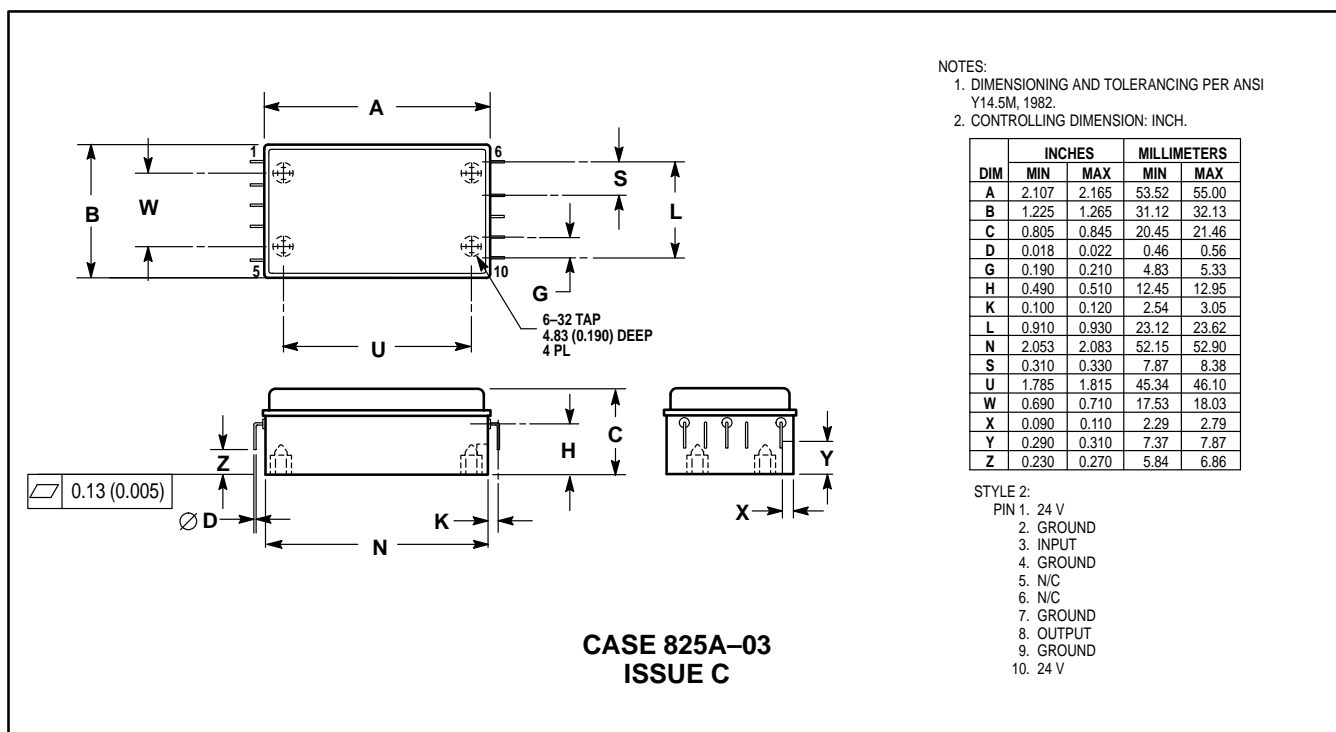

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447 or 602-303-5454

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609
INTERNET: <http://Design-NET.com>

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center,
3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-81-3521-8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298



MOTOROLA



MFF424B/D

