


### GENERAL PURPOSE J-FET SINGLE OPERATIONAL AMPLIFIER

- WIDE COMMON-MODE (UP TO  $V_{CC}^+$ ) AND DIFFERENTIAL VOLTAGE RANGE
- LOW INPUT BIAS AND OFFSET CURRENT
- OUTPUT SHORT-CIRCUIT PROTECTION
- HIGH INPUT IMPEDANCE J-FET INPUT STAGE
- INTERNAL FREQUENCY COMPENSATION
- LATCH UP FREE OPERATION
- HIGH SLEW RATE :  $16V/\mu s$  (typ)

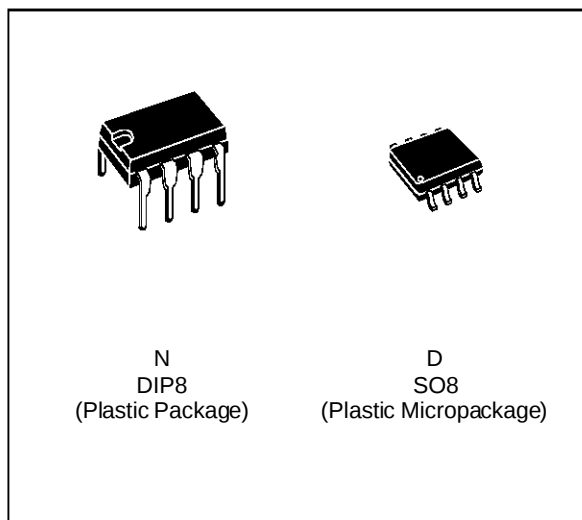

#### DESCRIPTION


The TL081, TL081A and TL081B are high speed J-FET input single operational amplifiers incorporating well matched, high voltage J-FET and bipolar transistors in a monolithic integrated circuit.

The devices feature high slew rates, low input bias and offset currents, and low offset voltage temperature coefficient.


#### ORDER CODES

| Part Number                 | Temperature Range | Package |   |
|-----------------------------|-------------------|---------|---|
|                             |                   | N       | D |
| TL081M/AM/BM                | -55°C, +125°C     | •       | • |
| TL081I/AI/BI                | -40°C, +105°C     | •       | • |
| TL081C/AC/BC                | 0°C, +70°C        | •       | • |
| Examples : TL081CD, TL081IN |                   |         |   |


#### PIN CONNECTIONS (top view)

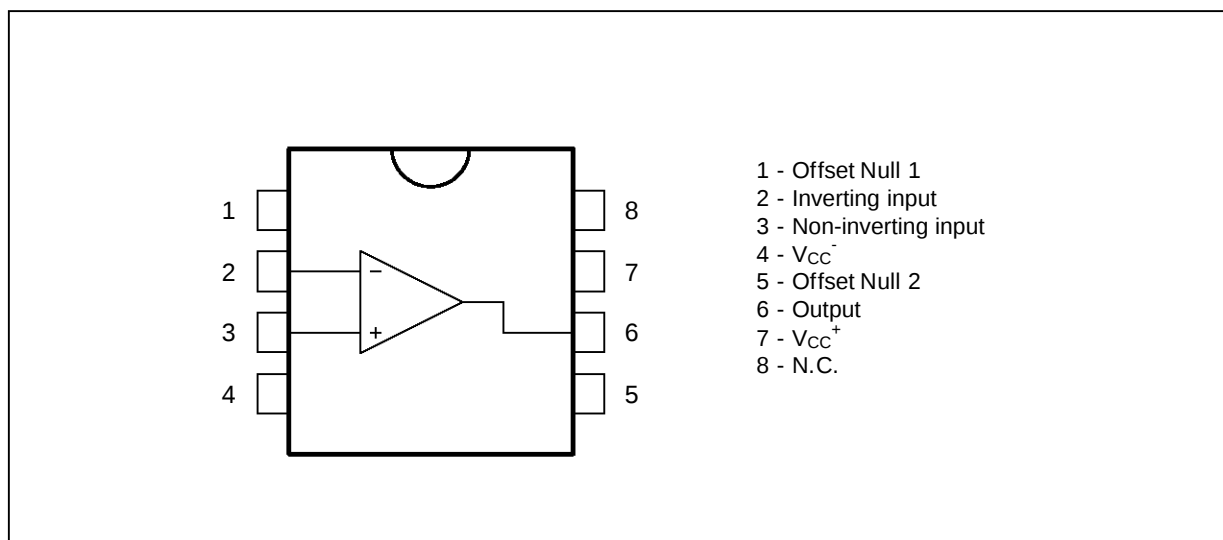

SCHEMATIC DIAGRAM

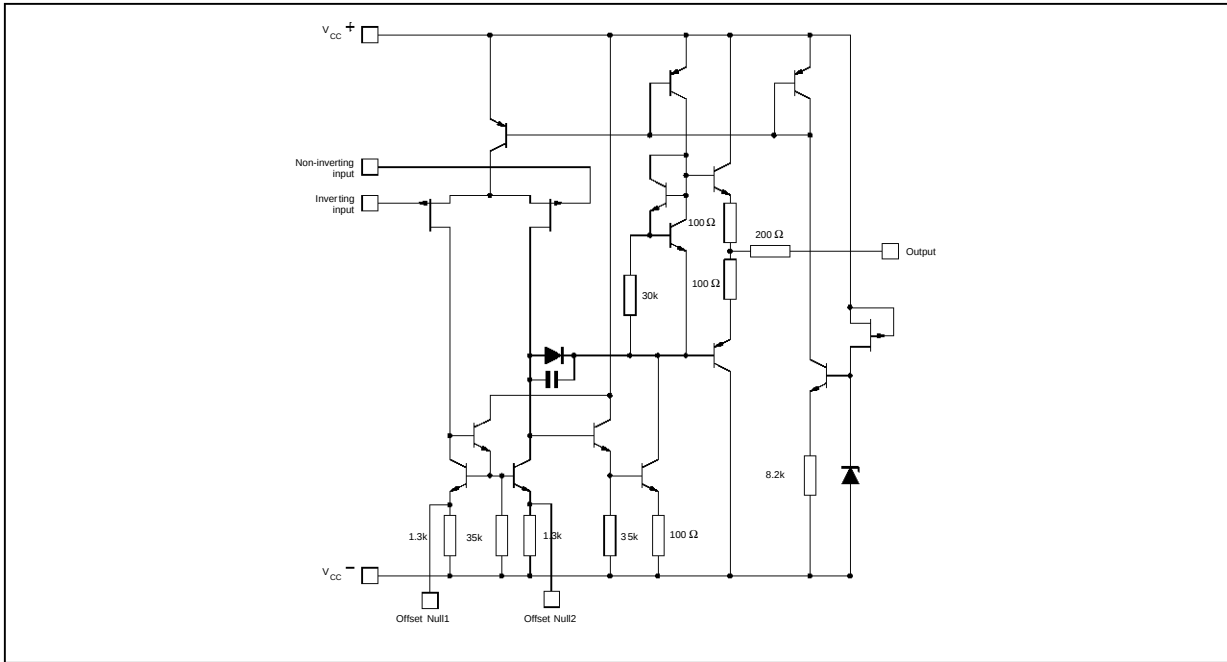

INPUT OFFSET VOLTAGE NULL CIRCUITS

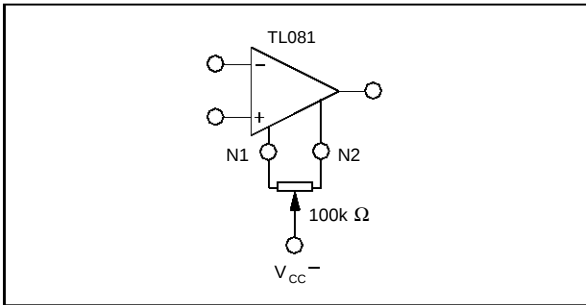

ABSOLUTE MAXIMUM RATINGS

| Symbol     | Parameter                                | Value                                                                               | Unit               |
|------------|------------------------------------------|-------------------------------------------------------------------------------------|--------------------|
| $V_{CC}$   | Supply Voltage - (note 1)                | $\pm 18$                                                                            | V                  |
| $V_i$      | Input Voltage - (note 3)                 | $\pm 15$                                                                            | V                  |
| $V_{id}$   | Differential Input Voltage - (note 2)    | $\pm 30$                                                                            | V                  |
| $P_{tot}$  | Power Dissipation                        | 680                                                                                 | mW                 |
|            | Output Short-circuit Duration - (note 4) | Infinite                                                                            |                    |
| $T_{oper}$ | Operating Free Air Temperature Range     | TL081C,AC,BC<br>TL081I,AI,BI<br>TL081M,AM,BM<br>0 to 70<br>-40 to 105<br>-55 to 125 | $^{\circ}\text{C}$ |
| $T_{stg}$  | Storage Temperature Range                | -65 to 150                                                                          | $^{\circ}\text{C}$ |


- Notes :
1. All voltage values, except differential voltage, are with respect to the zero reference level (ground) of the supply voltages where the zero reference level is the midpoint between  $V_{CC}^{+}$  and  $V_{CC}^{-}$ .
  2. Differential voltages are at the non-inverting input terminal with respect to the inverting input terminal.
  3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 volts, whichever is less.
  4. The output may be shorted to ground or to either supply. Temperature and /or supply voltages must be limited to ensure that the dissipation rating is not exceeded.

**ELECTRICAL CHARACTERISTICS**
 $V_{CC} = \pm 15V$ ,  $T_{amb} = 25^{\circ}C$  (unless otherwise specified)


| Symbol        | Parameter                                                                                                                                                                  | TL081,M,AC,AI,<br>AM,BC,BI,BM |            |                  | TL081C               |            |            | Unit                   |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|------------|------------------|----------------------|------------|------------|------------------------|
|               |                                                                                                                                                                            | Min.                          | Typ.       | Max.             | Min.                 | Typ.       | Max.       |                        |
| $V_{io}$      | Input Offset Voltage ( $R_S = 50\Omega$ )<br>$T_{amb} = 25^{\circ}C$<br>$T_{min.} \leq T_{amb} \leq T_{max.}$<br>TL081BC,BI,BM<br>TL081BC,BI,BM                            |                               | 3<br>1     | 6<br>3<br>7<br>5 |                      | 3          | 10<br>13   | mV                     |
| $DV_{io}$     | Input Offset Voltage Drift                                                                                                                                                 |                               | 10         |                  |                      | 10         |            | $\mu V/^{\circ}C$      |
| $I_{io}$      | Input Offset Current *<br>$T_{amb} = 25^{\circ}C$<br>$T_{min.} \leq T_{amb} \leq T_{max.}$                                                                                 |                               | 5          | 100<br>4         |                      | 5          | 100<br>4   | pA<br>nA               |
| $I_{ib}$      | Input Bias Current *<br>$T_{amb} = 25^{\circ}C$<br>$T_{min.} \leq T_{amb} \leq T_{max.}$                                                                                   |                               | 20         | 200<br>20        |                      | 20         | 400<br>20  | pA<br>nA               |
| $A_{vd}$      | Large Signal Voltage Gain ( $R_L = 2k\Omega$ , $V_O = \pm 10V$ )<br>$T_{amb} = 25^{\circ}C$<br>$T_{min.} \leq T_{amb} \leq T_{max.}$                                       | 50<br>25                      | 200        |                  | 25<br>15             | 200        |            | V/mV                   |
| SVR           | Supply Voltage Rejection Ratio ( $R_S = 50\Omega$ )<br>$T_{amb} = 25^{\circ}C$<br>$T_{min.} \leq T_{amb} \leq T_{max.}$                                                    | 80<br>80                      | 86         |                  | 70<br>70             | 86         |            | dB                     |
| $I_{CC}$      | Supply Current, no Load<br>$T_{amb} = 25^{\circ}C$<br>$T_{min.} \leq T_{amb} \leq T_{max.}$                                                                                |                               | 1.4        | 2.5<br>2.5       |                      | 1.4        | 2.5<br>2.5 | mA                     |
| $V_{icm}$     | Input Common Mode Voltage Range                                                                                                                                            | $\pm 11$                      | +15<br>-12 |                  | $\pm 11$             | +15<br>-12 |            | V                      |
| CMR           | Common Mode Rejection Ratio ( $R_S = 50\Omega$ )<br>$T_{amb} = 25^{\circ}C$<br>$T_{min.} \leq T_{amb} \leq T_{max.}$                                                       | 80<br>80                      | 86         |                  | 70<br>70             | 86         |            | dB                     |
| $I_{os}$      | Output Short-circuit Current<br>$T_{amb} = 25^{\circ}C$<br>$T_{min.} \leq T_{amb} \leq T_{max.}$                                                                           | 10<br>10                      | 40         | 60<br>60         | 10<br>10             | 40         | 60<br>60   | mA                     |
| $\pm V_{OPP}$ | Output Voltage Swing<br>$T_{amb} = 25^{\circ}C$<br>$T_{min.} \leq T_{amb} \leq T_{max.}$<br>$R_L = 2k\Omega$<br>$R_L = 10k\Omega$<br>$R_L = 2k\Omega$<br>$R_L = 10k\Omega$ | 10<br>12<br>10<br>12          | 12<br>13.5 |                  | 10<br>12<br>10<br>12 | 12<br>13.5 |            | V                      |
| SR            | Slew Rate ( $V_{in} = 10V$ , $R_L = 2k\Omega$ , $C_L = 100pF$ ,<br>$T_{amb} = 25^{\circ}C$ , unity gain)                                                                   | 8                             | 16         |                  | 8                    | 16         |            | V/ $\mu s$             |
| $t_r$         | Rise Time ( $V_{in} = 20mV$ , $R_L = 2k\Omega$ , $C_L = 100pF$ ,<br>$T_{amb} = 25^{\circ}C$ , unity gain)                                                                  |                               | 0.1        |                  |                      | 0.1        |            | $\mu s$                |
| $K_{OV}$      | Overshoot ( $V_{in} = 20mV$ , $R_L = 2k\Omega$ , $C_L = 100pF$ ,<br>$T_{amb} = 25^{\circ}C$ , unity gain)                                                                  |                               | 10         |                  |                      | 10         |            | %                      |
| GBP           | Gain Bandwidth Product ( $f = 100kHz$ ,<br>$T_{amb} = 25^{\circ}C$ , $V_{in} = 10mV$ , $R_L = 2k\Omega$ , $C_L = 100pF$ )                                                  | 2.5                           | 4          |                  | 2.5                  | 4          |            | MHz                    |
| $R_i$         | Input Resistance                                                                                                                                                           |                               | $10^{12}$  |                  |                      | $10^{12}$  |            | $\Omega$               |
| THD           | Total Harmonic Distortion ( $f = 1kHz$ , $A_V = 20dB$ ,<br>$R_L = 2k\Omega$ , $C_L = 100pF$ , $T_{amb} = 25^{\circ}C$ , $V_O = 2V_{PP}$ )                                  |                               | 0.01       |                  |                      | 0.01       |            | %                      |
| $e_n$         | Equivalent Input Noise Voltage<br>( $f = 1kHz$ , $R_S = 100\Omega$ )                                                                                                       |                               | 15         |                  |                      | 15         |            | $\frac{nV}{\sqrt{Hz}}$ |
| $\phi_m$      | Phase Margin                                                                                                                                                               |                               | 45         |                  |                      | 45         |            | Degrees                |

\* The input bias currents are junction leakage currents which approximately double for every  $10^{\circ}C$  increase in the junction temperature.


MAXIMUM PEAK-TO-PEAK OUTPUT  
VOLTAGE VERSUS FREQUENCY

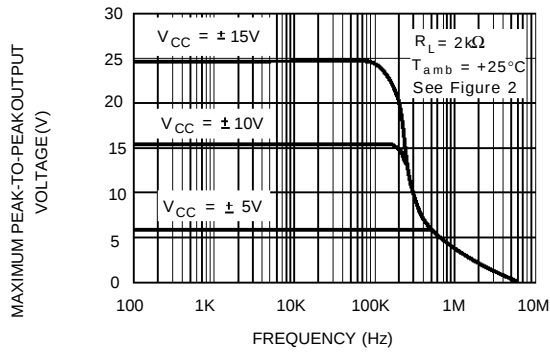


MAXIMUM PEAK-TO-PEAK OUTPUT  
VOLTAGE VERSUS FREQUENCY

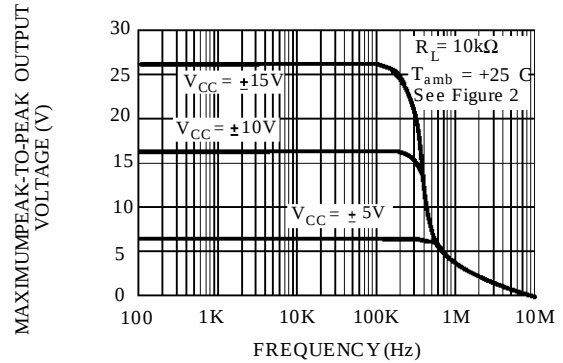


MAXIMUM PEAK-TO-PEAK OUTPUT  
VOLTAGE VERSUS FREQUENCY

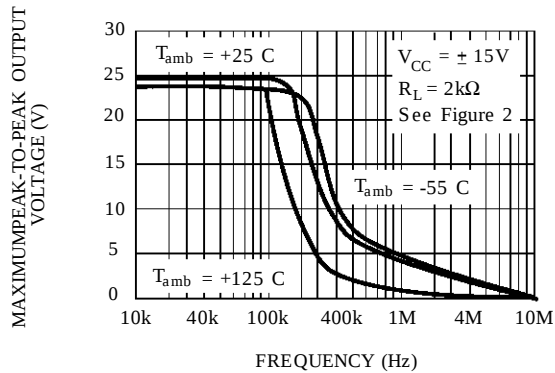


MAXIMUM PEAK-TO-PEAK OUTPUT  
VOLTAGE VERSUS FREE AIR TEMP.

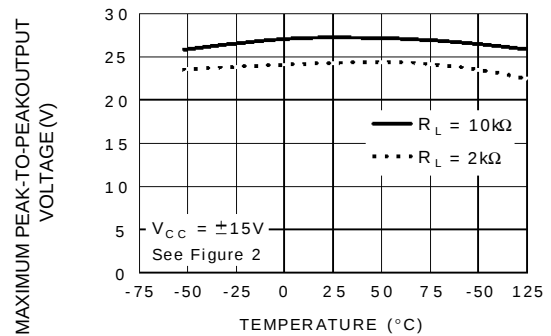


MAXIMUM PEAK-TO-PEAK OUTPUT  
VOLTAGE VERSUS LOAD RESISTANCE

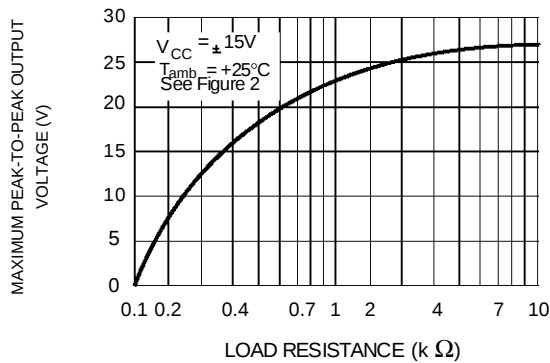


MAXIMUM PEAK-TO-PEAK OUTPUT  
VOLTAGE VERSUS SUPPLY VOLTAGE

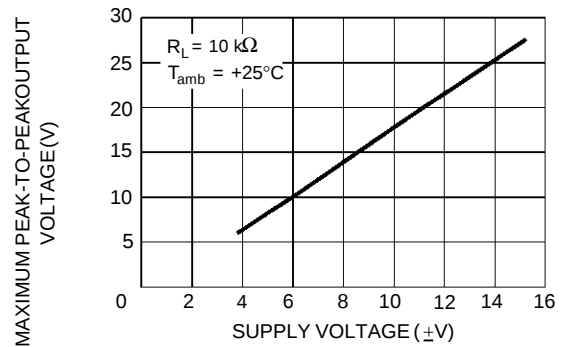


**INPUT BIAS CURRENT VERSUS  
FREE AIR TEMPERATURE**

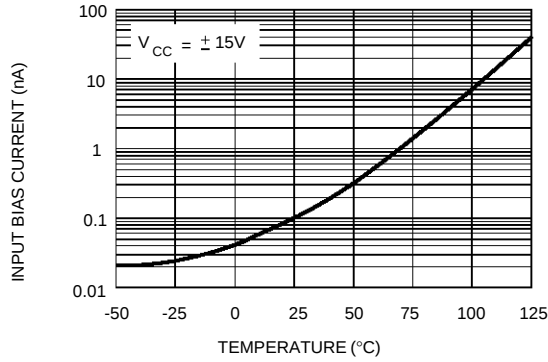


**LARGE SIGNAL DIFFERENTIAL  
VOLTAGE AMPLIFICATION VERSUS  
FREE AIR TEMPERATURE**

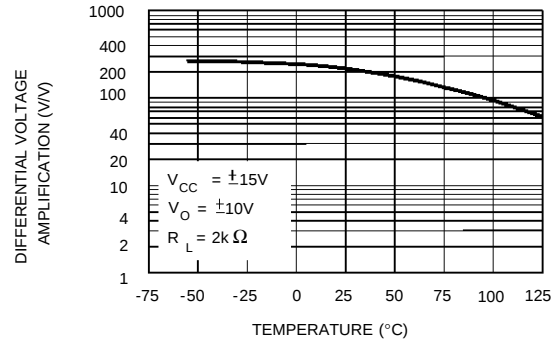


**LARGE SIGNAL DIFFERENTIAL  
VOLTAGE AMPLIFICATION AND PHASE  
SHIFT VERSUS FREQUENCY**

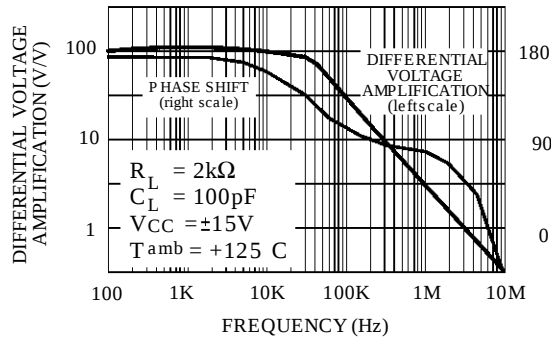


**TOTAL POWER DISSIPATION VERSUS  
FREE AIR TEMPERATURE**

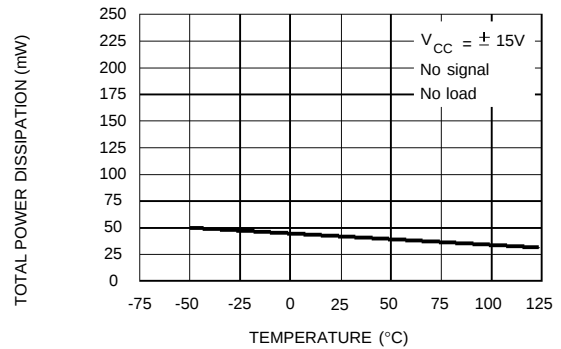


**SUPPLY CURRENT PER AMPLIFIER  
VERSUS FREE AIR TEMPERATURE**

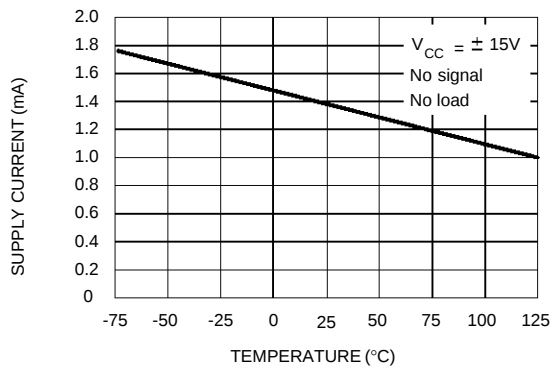


**SUPPLY CURRENT PER AMPLIFIER  
VERSUS SUPPLY VOLTAGE**

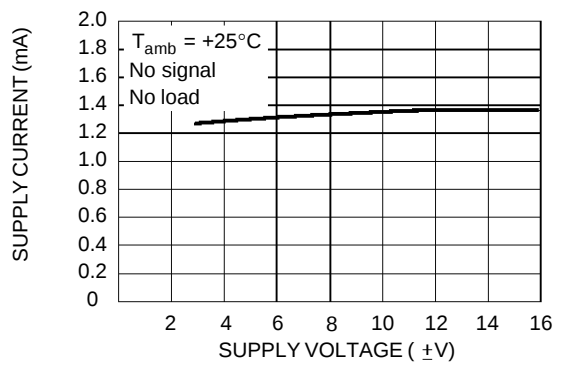


COMMON MODE REJECTION RATIO  
VERSUS FREE AIR TEMPERATURE

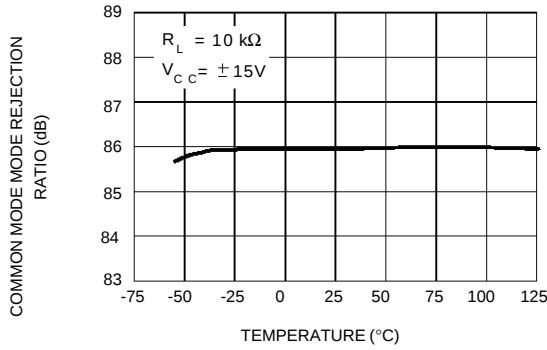


VOLTAGE FOLLOWER LARGE SIGNAL  
PULSE RESPONSE

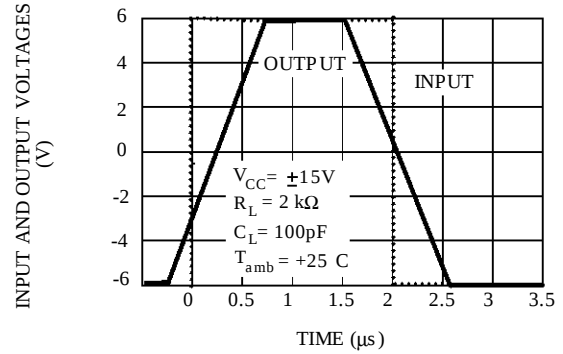


OUTPUT VOLTAGE VERSUS  
ELAPSED TIME

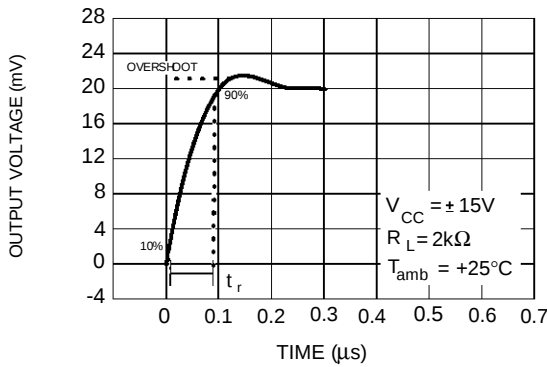

EQUIVALENT INPUT NOISE VOLTAGE  
VERSUS FREQUENCY

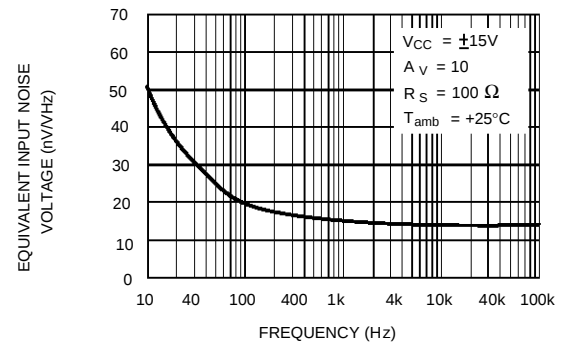

TOTAL HARMONIC DISTORTION VERSUS  
FREQUENCY

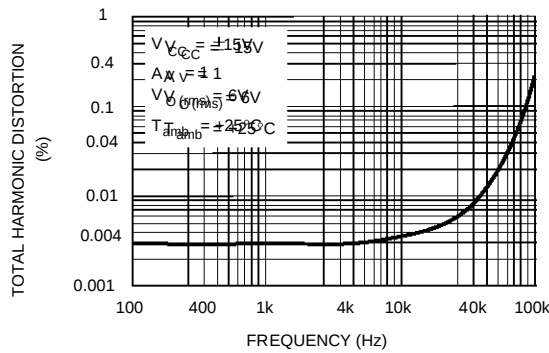

## PARAMETER MEASUREMENT INFORMATION

Figure 1 : Voltage Follower



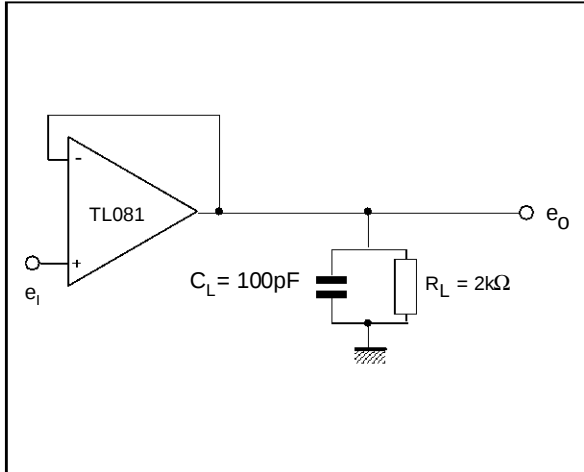


Figure 2 : Gain-of-10 Inverting Amplifier

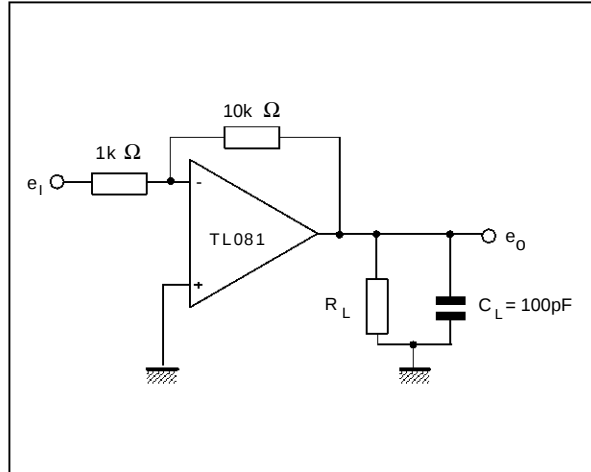


## TYPICAL APPLICATIONS


### (0.5Hz) SQUARE WAVE OSCILLATOR

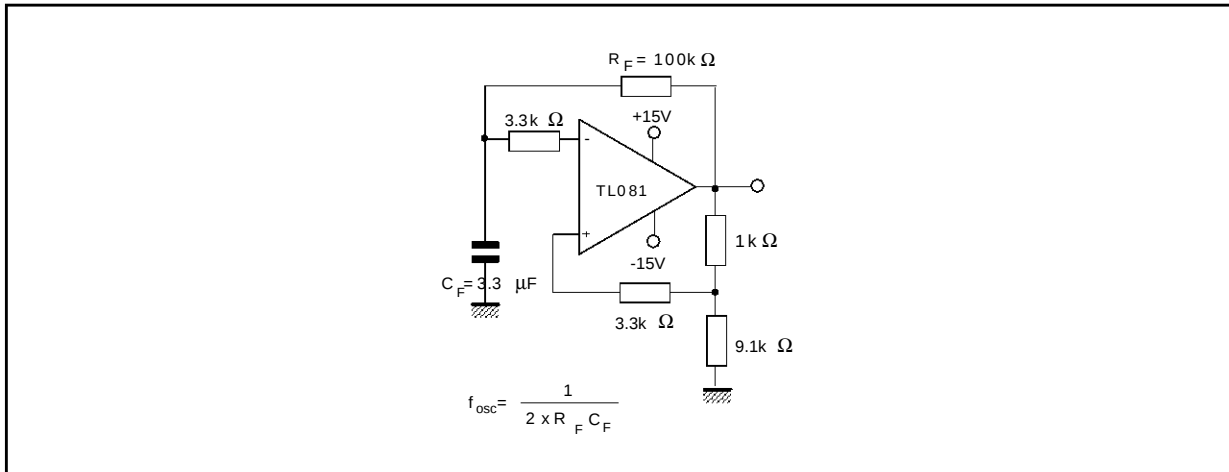

### HIGH Q NOTCH FILTER

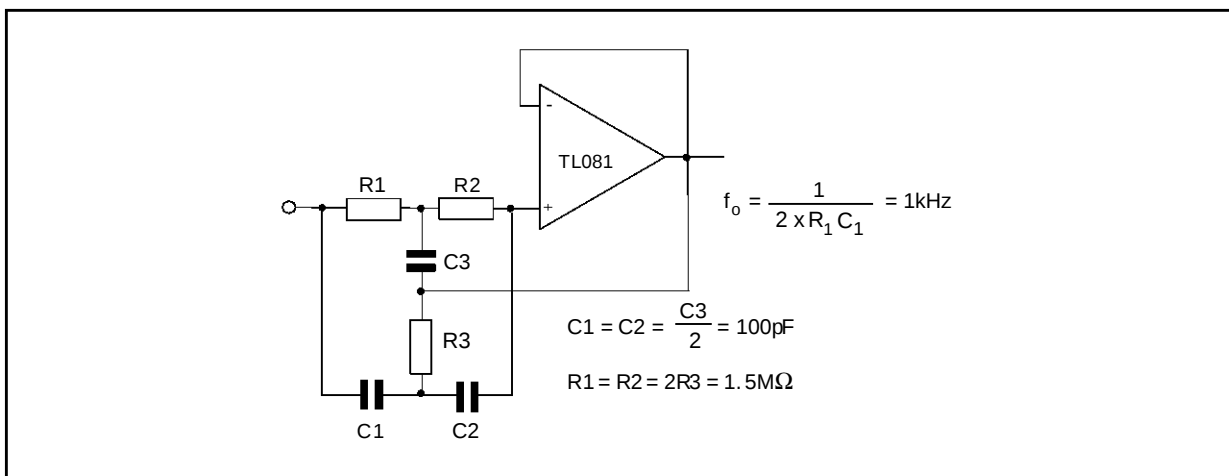

PACKAGE MECHANICAL DATA  
8 PINS - PLASTIC DIP

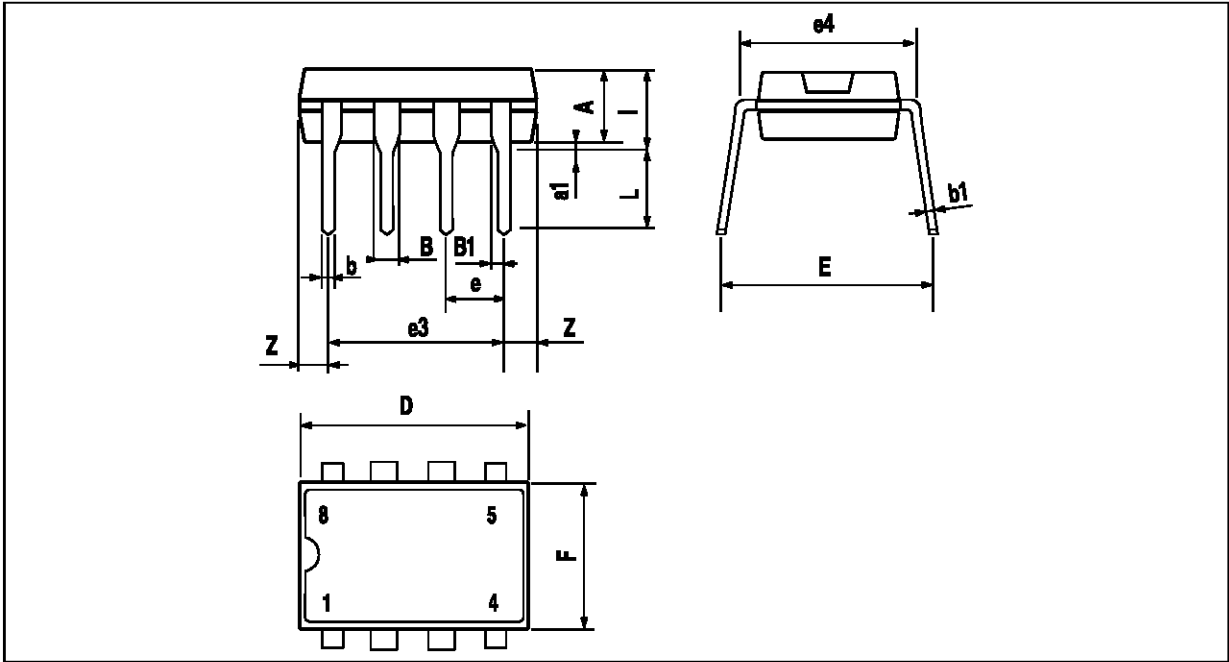


PM-DIP8.EPS

| Dimensions | Millimeters |      |       | Inches |       |       |
|------------|-------------|------|-------|--------|-------|-------|
|            | Min.        | Typ. | Max.  | Min.   | Typ.  | Max.  |
| A          |             | 3.32 |       |        | 0.131 |       |
| a1         | 0.51        |      |       | 0.020  |       |       |
| B          | 1.15        |      | 1.65  | 0.045  |       | 0.065 |
| b          | 0.356       |      | 0.55  | 0.014  |       | 0.022 |
| b1         | 0.204       |      | 0.304 | 0.008  |       | 0.012 |
| D          |             |      | 10.92 |        |       | 0.430 |
| E          | 7.95        |      | 9.75  | 0.313  |       | 0.384 |
| e          |             | 2.54 |       |        | 0.100 |       |
| e3         |             | 7.62 |       |        | 0.300 |       |
| e4         |             | 7.62 |       |        | 0.300 |       |
| F          |             |      | 6.6   |        |       | 0.260 |
| i          |             |      | 5.08  |        |       | 0.200 |
| L          | 3.18        |      | 3.81  | 0.125  |       | 0.150 |
| Z          |             |      | 1.52  |        |       | 0.060 |

DIP8.TBL

**PACKAGE MECHANICAL DATA**  
8 PINS - PLASTIC MICROPACKAGE (SO)

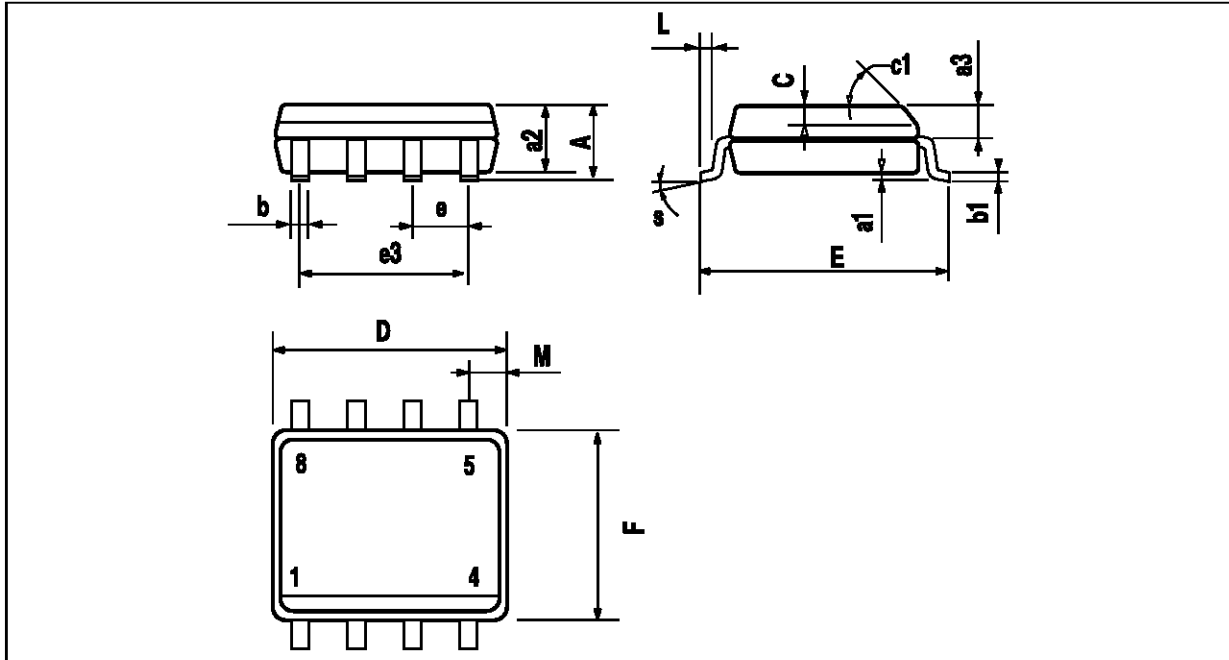

| Dimensions | Millimeters |      |      | Inches |       |       |
|------------|-------------|------|------|--------|-------|-------|
|            | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A          |             |      | 1.75 |        |       | 0.069 |
| a1         | 0.1         |      | 0.25 | 0.004  |       | 0.010 |
| a2         |             |      | 1.65 |        |       | 0.065 |
| a3         | 0.65        |      | 0.85 | 0.026  |       | 0.033 |
| b          | 0.35        |      | 0.48 | 0.014  |       | 0.019 |
| b1         | 0.19        |      | 0.25 | 0.007  |       | 0.010 |
| C          | 0.25        |      | 0.5  | 0.010  |       | 0.020 |
| c1         | 45° (typ.)  |      |      |        |       |       |
| D          | 4.8         |      | 5.0  | 0.189  |       | 0.197 |
| E          | 5.8         |      | 6.2  | 0.228  |       | 0.244 |
| e          |             | 1.27 |      |        | 0.050 |       |
| e3         |             | 3.81 |      |        | 0.150 |       |
| F          | 3.8         |      | 4.0  | 0.150  |       | 0.157 |
| L          | 0.4         |      | 1.27 | 0.016  |       | 0.050 |
| M          |             |      | 0.6  |        |       | 0.024 |
| S          | 8° (max.)   |      |      |        |       |       |

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1997 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco  
The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.