

2-INPUT 3CHANNEL VIDEO SWITCH

■ GENERAL DESCRIPTION

NJM2283 is a switching IC for switching over from one audio or video input signal to another. Internalizing 2 inputs and 1 output, and then each set of 3 can be operated independently. It is a higher efficiency video switch, featuring the supply voltage range 4.75 to 13.0V, the frequency feature 10MHz, and then Crosstalk 75dB (at 4.43MHz).


■ FEATURES

- 2 Input-1 Output 3 Circuits internalizing
- Wide Operating Voltage (4.75 ~ 13.0V)
- Crosstalk 75dB(at 4.43MHz)
- Wide Operating Supply Range 10MHz(2V_{P-P} Input)
- Wide Bandwidth Frequency
- Package Outline DIP16, DMP16, SSOP16


■ APPLICATIONS

VCR, Video Camera, AV-TV, Video Disk Player.

■ PACKAGE OUTLINE



NJM2283D




NJM2283M



NJM2283V

■ BLOCK DIAGRAM

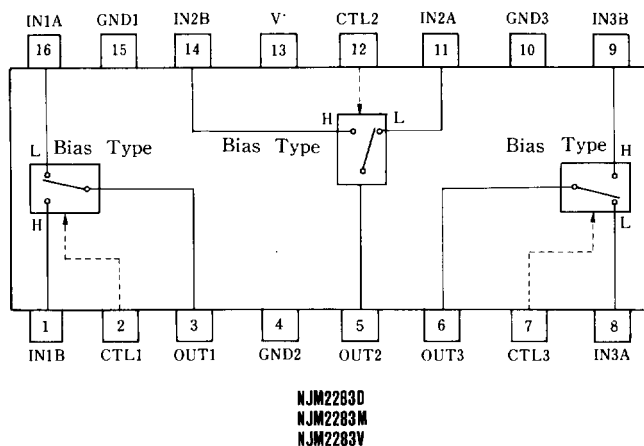



■ MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V*	14	V
Power Dissipation	Pd	(DIP16) 700	mW
		(DMP16) 350	mW
		(SSOP16) 300	mW
Operating Temperature Range	Topr	-20~+75	°C
Storage Temperature Range	Tstg	-40~+125	°C

■ ELECTRICAL CHARACTERISTICS

(V*=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current (1)	ICC1	V*=5V (Note1)	8.3	11.8	15.3	mA
Operating Current (2)	ICC2	V*=9V (Note1)	10.4	14.8	19.2	mA
Voltage Gain	Gv	V _i = 100kHz, 2V _{P-P} , V _O /V _i	-0.6	-0.1	+0.4	dB
Frequency Gain	G _F	V _i = 2V _{P-P} , V _O (10MHz)/V _O (100kHz)	-1.0	0	+1.0	dB
Differential Gain	DG	V _i = 2V _{P-P} , Standard Staircase Signal	—	0.3	—	%
Differential Phase	DP	V _i = 2V _{P-P} , Standard Staircase Signal	—	0.3	—	deg
Output Offset Voltage	V _{OS}	(Note2)	-10	0	+10	mV
Crosstalk	CT	V _i = 2V _{P-P} , 4.43MHz, V _O /V _i	—	-75	—	dB
Switch Change Over Voltage	V _{CH}	All inside switch ON	2.5	—	—	V
Switch Change Over Voltage	V _{CL}	All inside switch OFF	—	—	1.0	V


(Note1) S1=S2=S3=S4=S5=S6=S7=1

(Note2) S1=S2=S3=S4=S5=S6=1, S7=1→2 Measure the output DC voltage difference

**■ TERMINAL EXPLANATION**

PIN No.	PIN NAME	VOLTAGE	INSIDE EQUIVALENT CIRCUIT
16 1 11 14 8 9	IN 1 A IN 1 B IN 2 A IN 2 B IN 3 A IN 3 B [Input]	2.5V	
2 12 7	CTL 1 CTL 2 CTL 3 [Switching]		
3 5 6	OUT 1 OUT 2 OUT 3 [Output]	1.8 V	
13	V+	5 V	
15 4 10	GND 1 GND 2 GND 3		

■ TEST CIRCUIT






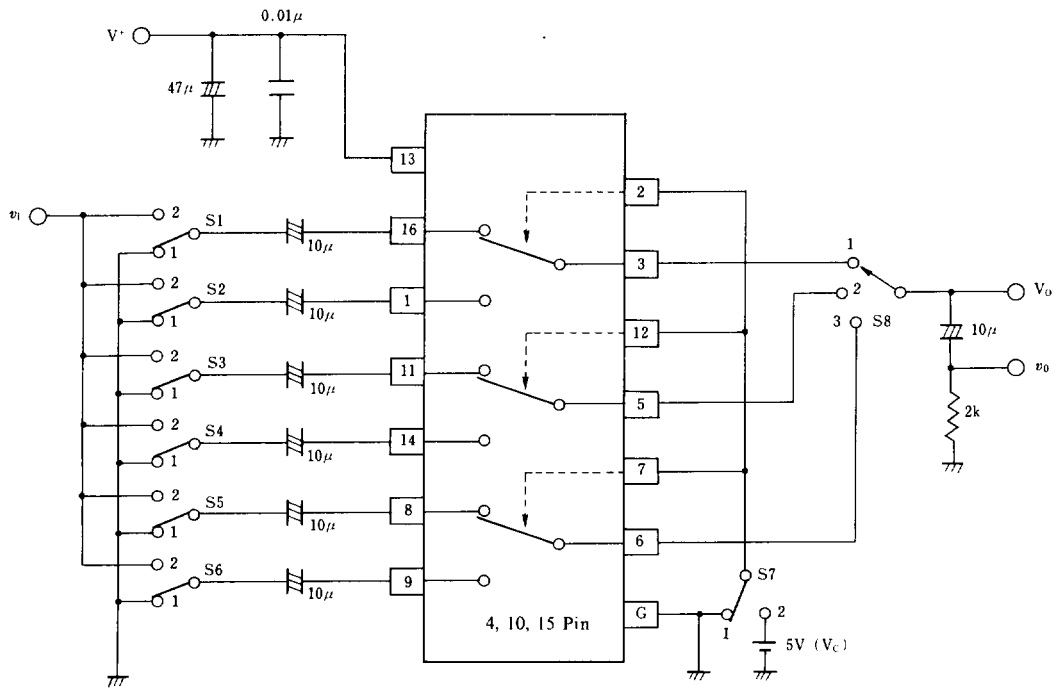


5

[illegible]









■ TYPICAL CHARACTERISTICS

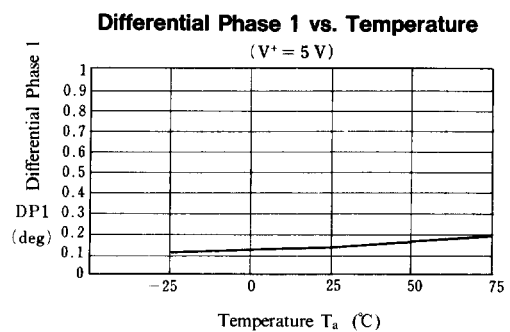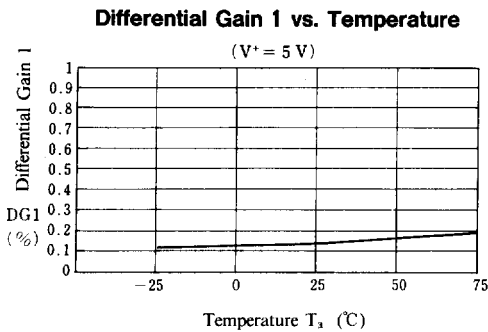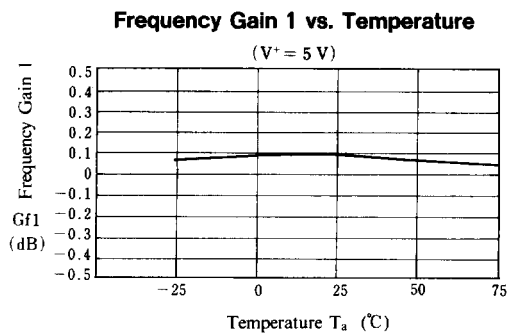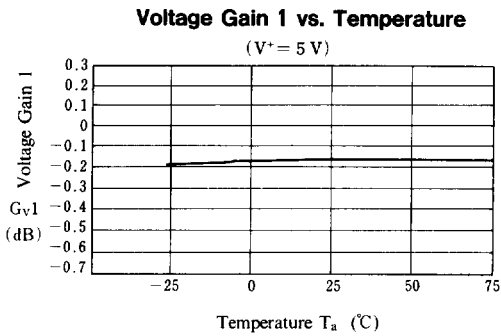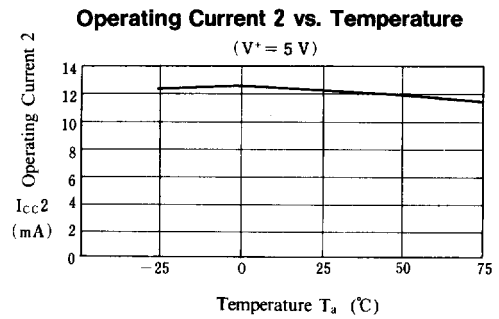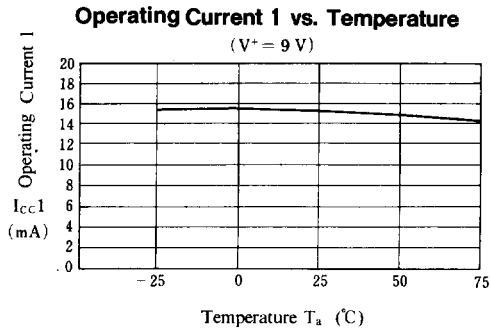




■ TYPICAL CHARACTERISTICS

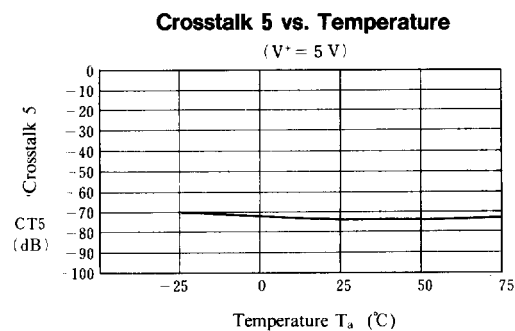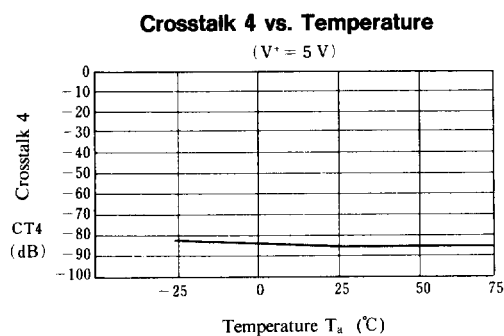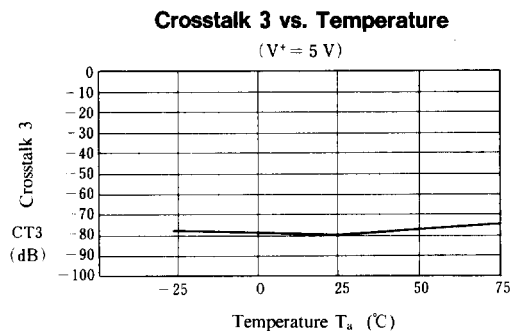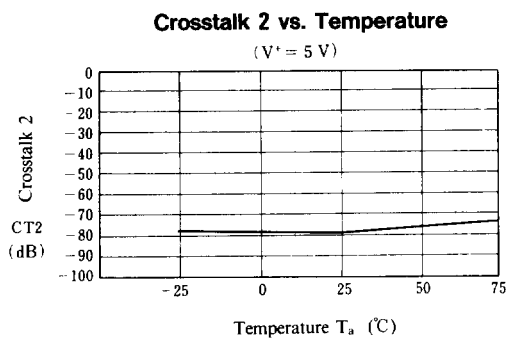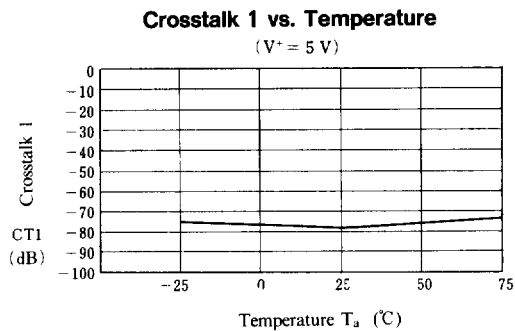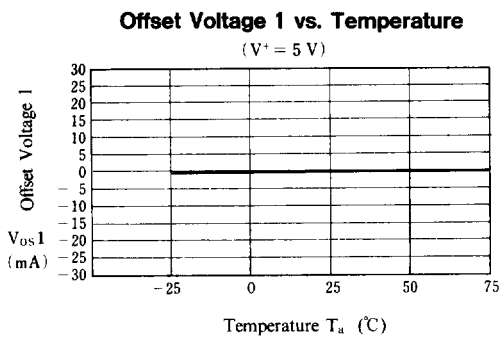

■ TYPICAL CHARACTERISTICS


Crosstalk 6 vs. Temperature

($V^+ = 5\text{ V}$)

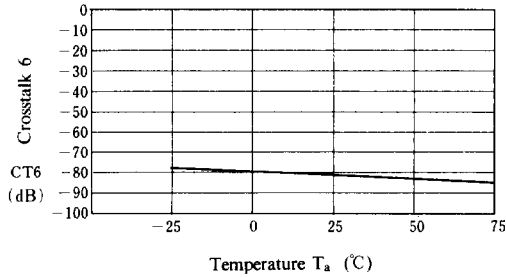


Switch Change Over 1 vs. Operating Voltage

($V^+ = 5\text{ V}$)

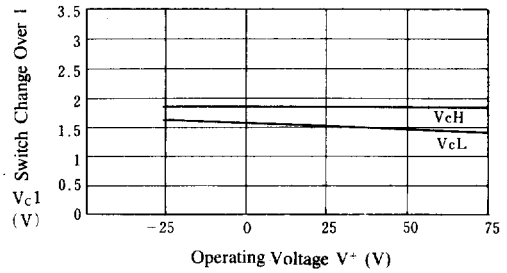


Operating Current vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

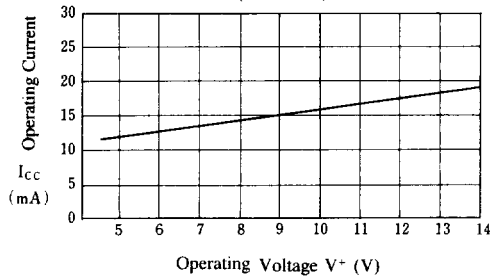


Voltage Gain 1 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

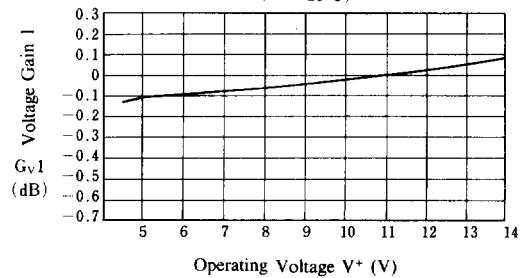


Frequency Gain 1 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

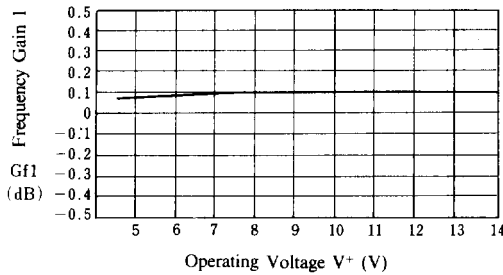

Differential Gain 1 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

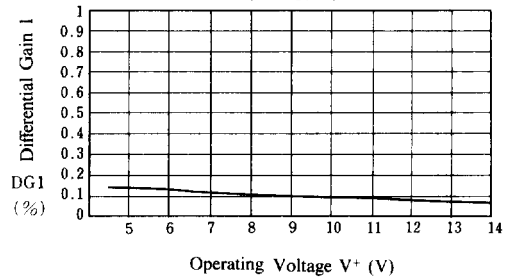




TYPICAL CHARACTERISTICS


Differential Phase 1 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

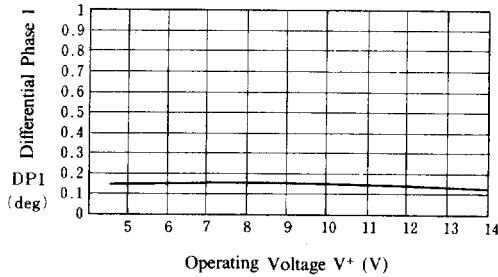


Offset Voltage 1 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

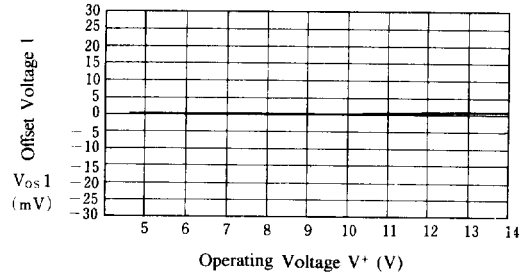


Crosstalk 1 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

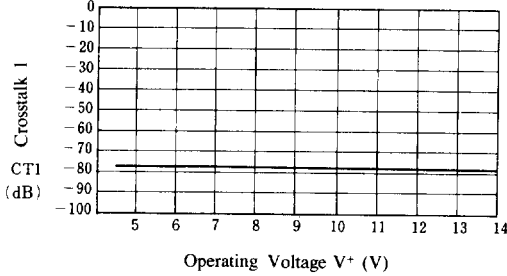


Crosstalk 2 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

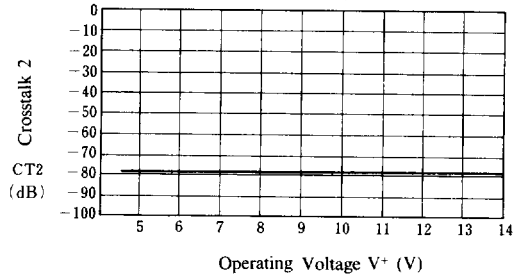


Crosstalk 3 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

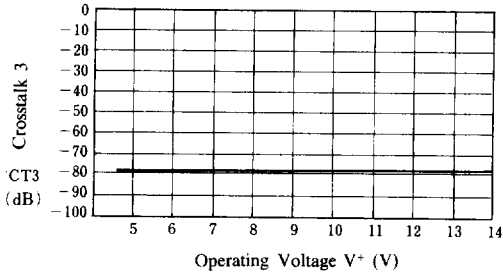


Crosstalk 4 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

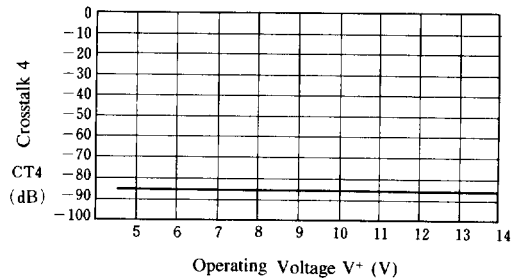


**■ TYPICAL CHARACTERISTICS****Crosstalk 5 vs. Operating Voltage**


(Ta=25°C)

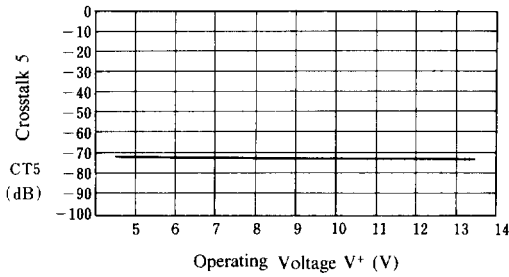**Crosstalk 6 vs. Operating Voltage**


(Ta=25°C)

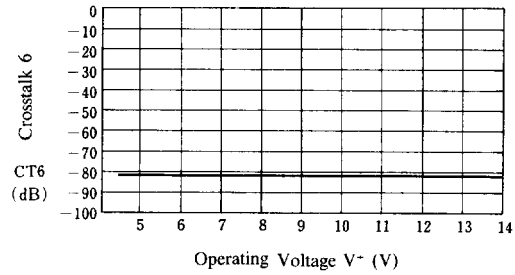**Switch Change Over 1 vs. Operating Voltage**


(Ta=25°C)

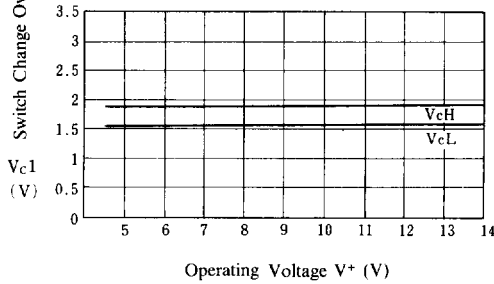**Voltage Gain 1 vs. Frequency Feature**


(Ta=25°C)

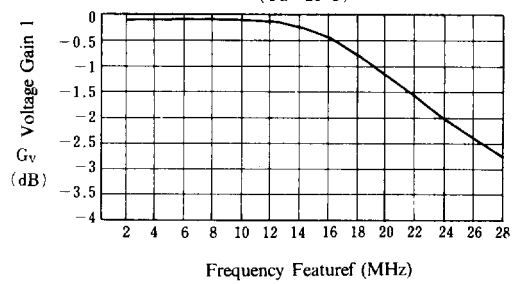**Differential Gain 1 vs. Load Resistor**

(Ta=25°C)

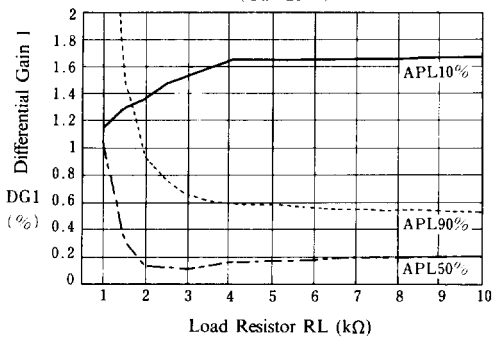**Differential Phase 1 vs. Load Resistor**

(Ta=25°C)

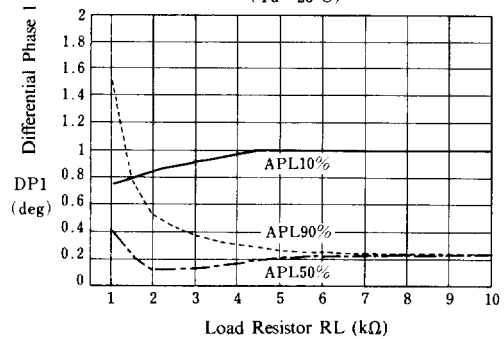




■ TYPICAL CHARACTERISTICS


Differential Gain 1 vs. APL

($T_a = 25^\circ\text{C}$)

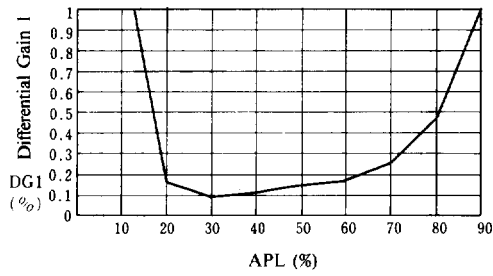

Differential Phase 1 vs. APL

($T_a = 25^\circ\text{C}$)

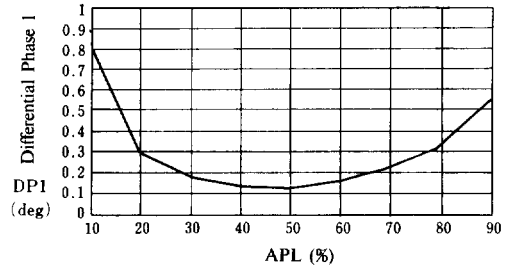

Total Harmonic Distortion vs. Load Resistor

($T_a = 25^\circ\text{C}$)

