




## 3-INPUT/2-INPUT VIDEO SWITCH

### ■ GENERAL DESCRIPTION

The NJM2508 is video switch for video and audio signal. It contains 3 input-1 output and 2 input-1 output video switch. One input terminal has clamp function and so is applied to fixed DC level of video signal. Its operating voltage is 4.75 to 13V and bandwidth is 10MHz. Crosstalk is 75dB (at f=4.43MHz).

### ■ PACKAGE OUTLINE

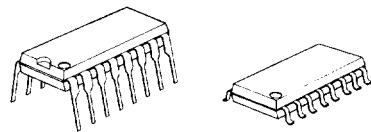

NJM2508D

NJM2508M



NJM2508V

### ■ FEATURES

- Operating Voltage (+4.75V ~ +13V)
- 3 Input-1 Output and 2 Input-1 Output
- Crosstalk 75dB(at 4.43MHz)
- Wide Frequency Range 10MHz(2V<sub>P-P</sub> Input)
- Package Outline DIP16, DMP16, SSOP16
- Bipolar Technology


### ■ RECOMMENDED OPERATING CONDITION

- Operating Voltage V<sup>+</sup> 4.75~13.0V

### ■ APPLICATION

- VTR, Video Camera, AV-TV, Video Disk Player.

### ■ BLOCK DIAGRAM

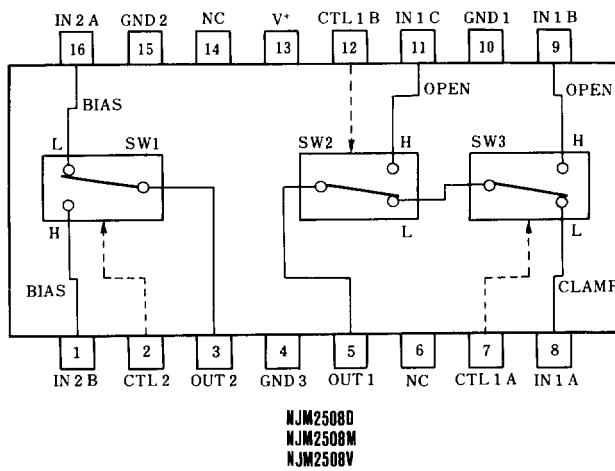

NJM2508D

NJM2508M

NJM2508V



## ■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER                   | SYMBOL           | RATINGS                                    | UNIT |
|-----------------------------|------------------|--|------|
| Supply Voltage              | V <sup>+</sup>   | 14   | V    |
| Power Dissipation           | P <sub>D</sub>   | (DIP16) 700<br>(DMP16) 350<br>(SSOP16) 300 | mW   |
| Operating Temperature Range | T <sub>opr</sub> | -20 ~ +75                                  | °C   |
| Storage Temperature Range   | T <sub>stg</sub> | -40 ~ +125                                 | °C   |

## ■ ELECTRICAL CHARACTERISTICS

(V<sup>+</sup>=5V, Ta=25°C)


| PARAMETER             | SYMBOL           | TEST CONDITION  | MIN. | TYP. | MAX. | UNIT |
|-----------------------|------------------|---|------|------|------|------|
| Operating Current 1   | I <sub>CC1</sub> | V <sup>+</sup> =5V (Note1)  | 6.6  | 9.4  | 12.3 | mA   |
| Operating Current 2   | I <sub>CC2</sub> | V <sup>+</sup> =9V (Note1)  | 8.0  | 11.5 | 15.0 | mA   |
| Voltage Gain          | G <sub>V</sub>   | V <sub>I</sub> =2V <sub>P-P</sub> /100kHz, V <sub>O</sub> /V <sub>I</sub>   | -0.6 | -0.1 | +0.4 | dB   |
| Frequency Response    | G <sub>f</sub>   | V <sub>I</sub> =2V <sub>P-P</sub> , V <sub>O</sub> (10MHz/100MHz)           | -1.0 | 0    | +1.0 | dB   |
| Differential Gain     | D <sub>G</sub>   | V <sub>I</sub> =2V <sub>P-P</sub> Staircase Signal                          | —    | 0.3  | —    | %    |
| Differential Phasa    | D <sub>P</sub>   | V <sub>I</sub> =2V <sub>P-P</sub> Staircase Signal                          | —    | 0.3  | —    | deg  |
| Output Offset Voltage | V <sub>OS</sub>  | (Note2)   | -10  | 0    | +10  | mV   |
| Crosstalk             | C <sub>T</sub>   | V <sub>I</sub> =2V <sub>P-P</sub> , 4.43MHz, V <sub>O</sub> /V <sub>I</sub> | —    | -75  | —    | dB   |
| Switch Change Voltage | V <sub>CH</sub>  | All inside SW: ON   | 2.5  | —    | —    | V    |
| Switch Change Voltage | V <sub>CL</sub>  | All inside SW: OFF  | —    | —    | 1.0  | V    |

(Note1) S1=S2=S3=S4=S5=S6=S7=1

(Note2) Output DC Voltage Difference is tested on S6=1→2, S1=S2=S3=S4=S5=1, S8=2 and S7=1

5

## ■ TEST CIRCUIT

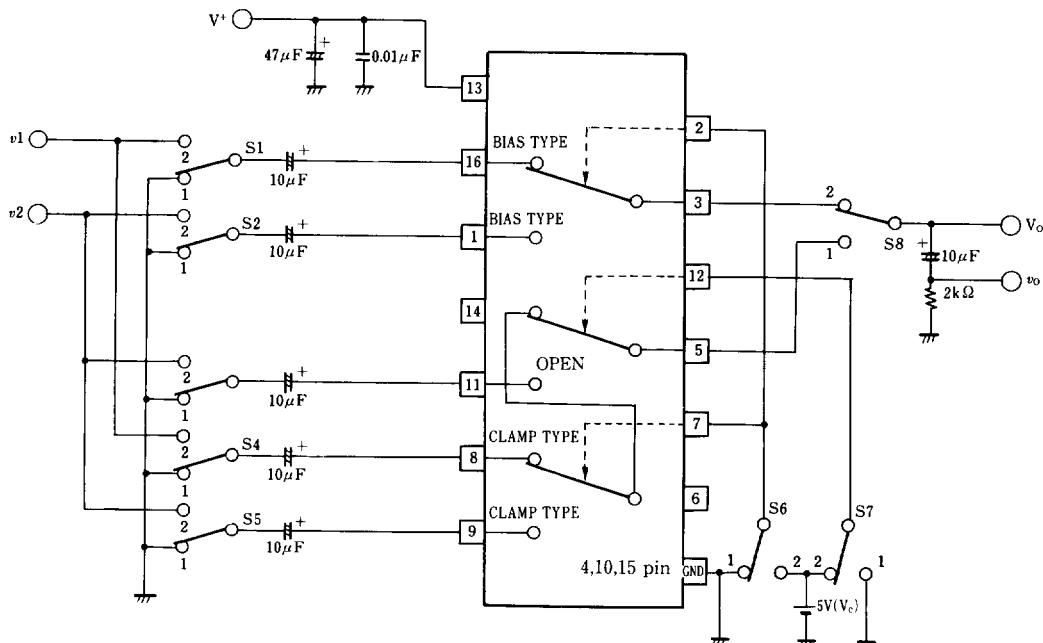



# NJM2508


## ■ PIN FUNCTION

| PIN NO.       | PIN NAME                                 | DC VOLTAGE | INSIDE EQUIVALENT CIRCUIT |
|---------------|--|------------|---------------------------|
| 16<br>1       | IN 2 A<br>IN 2 B<br>(Input)              | 2.5V       |                           |
| 8             | IN 1 A<br>(Input)                        | 1.5V       |                           |
| 9<br>11       | IN 1 B<br>IN 1 C<br>(Input)              |            |                           |
| 7<br>12<br>2  | CTL 1 A<br>CTL 1 B<br>CTL 2<br>(Control) |            |                           |
| 5             | OUT 1<br>(Output)                        | 1.8V       |                           |
| 3             | OUT 2<br>(Output)                        | 0.8V       |                           |
| 13            | V <sup>+</sup>                           | 5V         |                           |
| 15<br>4<br>10 | GND 1<br>GND 2<br>GND 3                  |            |                           |


5

■ TYPICAL CHARACTERISTICS ( $T_a = +25^\circ\text{C}$ )


**Operating Current vs. Operating Voltage**

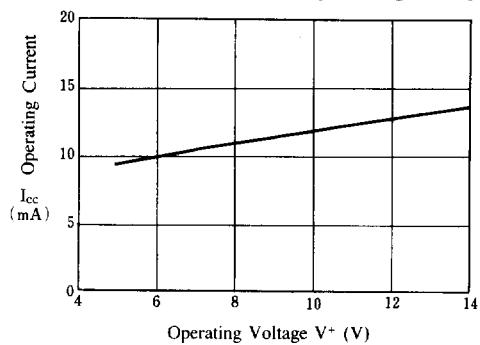


**Operating Current vs. Ambient Temperature**

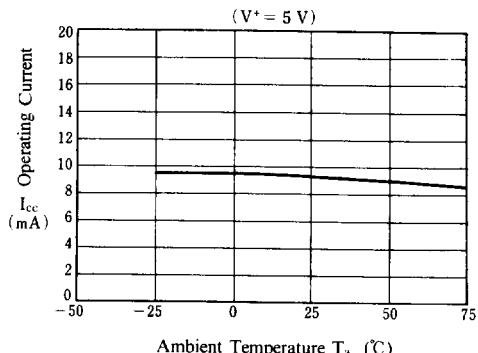


**Operating Current vs. Ambient Temperature**

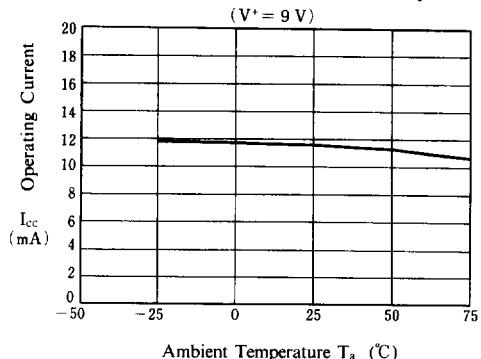


**Voltage Gain vs. Operating Voltage**

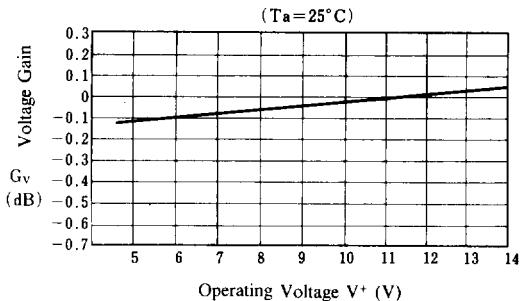

**Voltage Gain vs. Frequency**






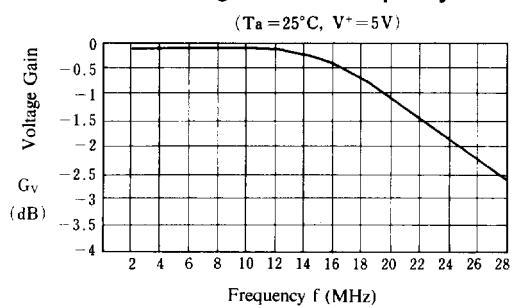


**Voltage Gain vs. Ambient Temperature**






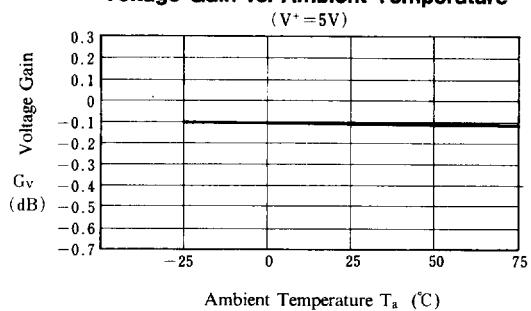




## ■ TYPICAL CHARACTERISTICS ( $T_a = +25^\circ\text{C}$ )

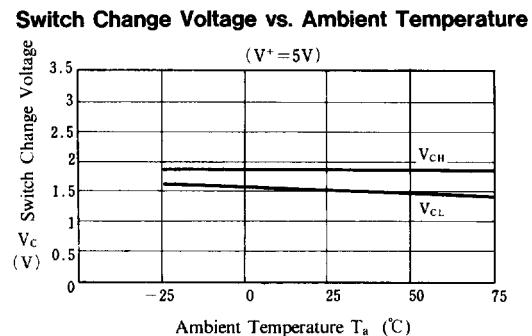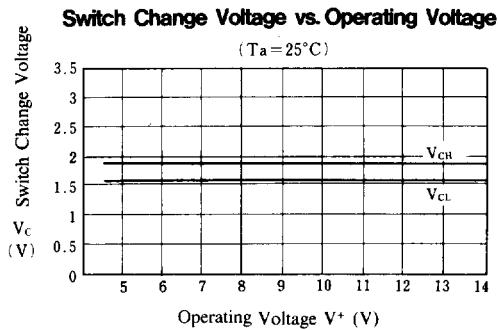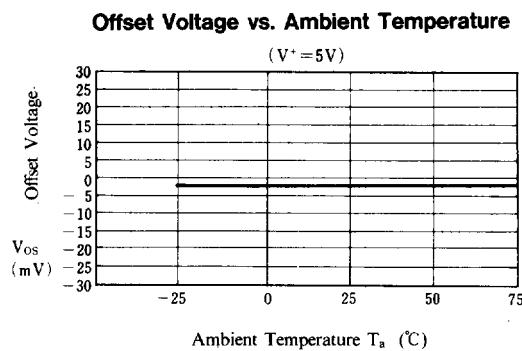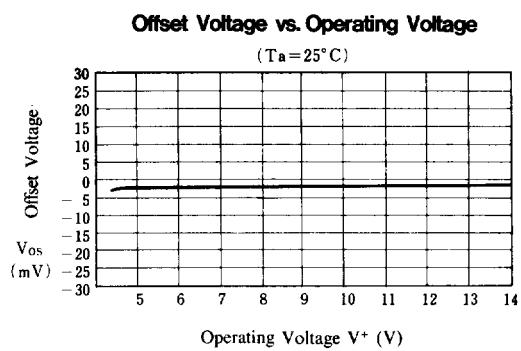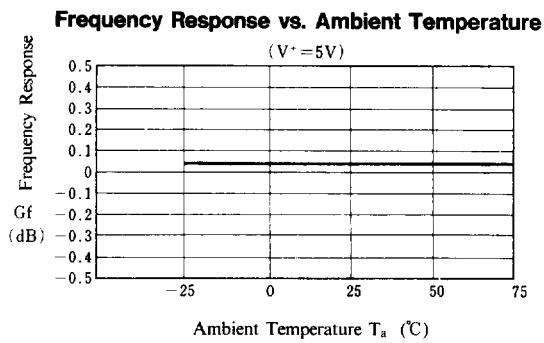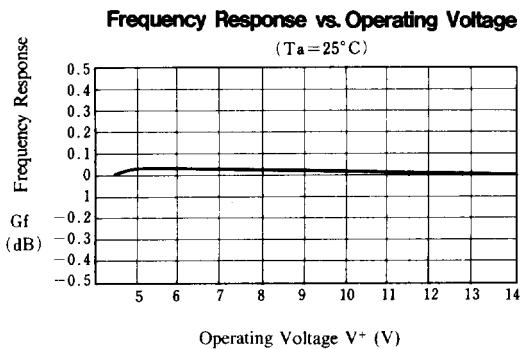


■ TYPICAL CHARACTERISTICS ( $T_a = +25^\circ\text{C}$ )

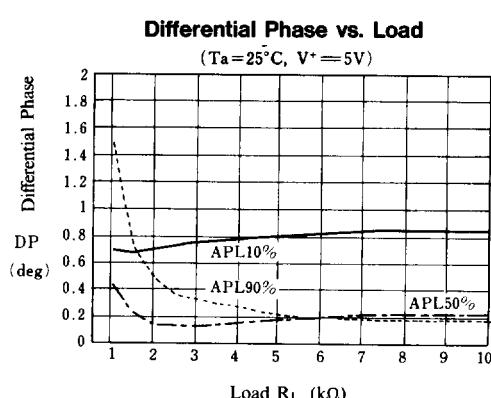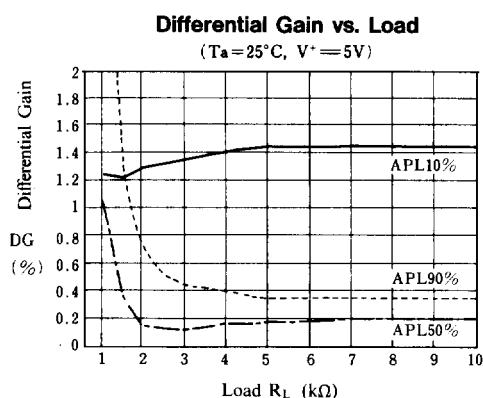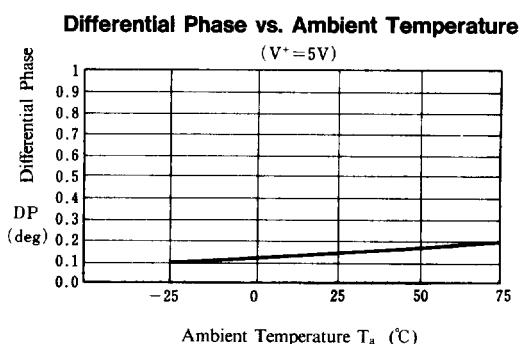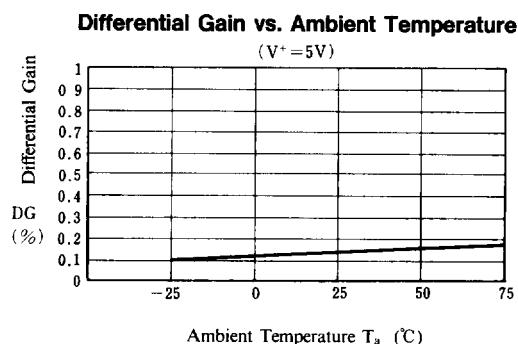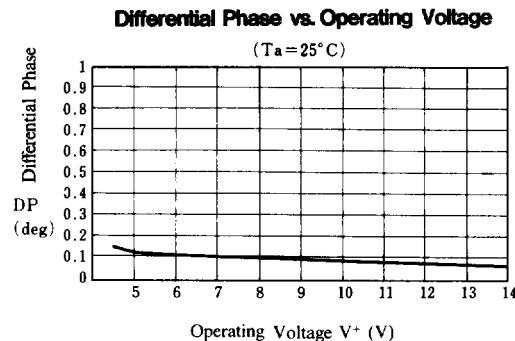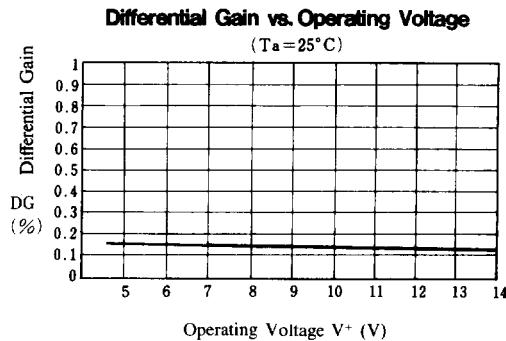




■ TYPICAL CHARACTERISTICS ( $T_a = +25^\circ\text{C}$ )


Differential Gain vs. APL

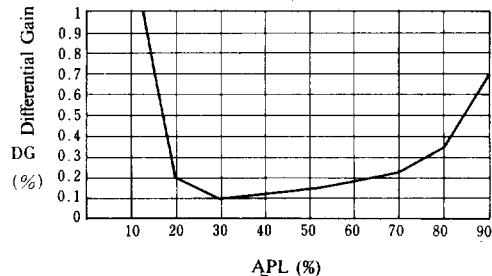 $(T_a = 25^\circ\text{C}, V^+ = 5\text{V})$ 


Differential Phase vs. APL

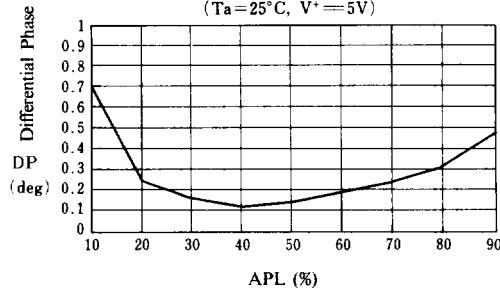 $(T_a = 25^\circ\text{C}, V^+ = 5\text{V})$ 


Differential Gain vs. Load

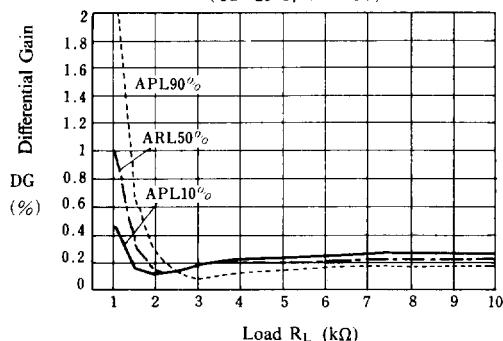 $(T_a = 25^\circ\text{C}, V^+ = 5\text{V})$ 


Differential Phase vs. Load

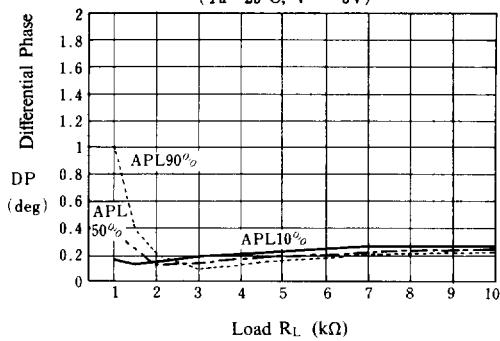 $(T_a = 25^\circ\text{C}, V^+ = 5\text{V})$ 







Differential Gain vs. APL

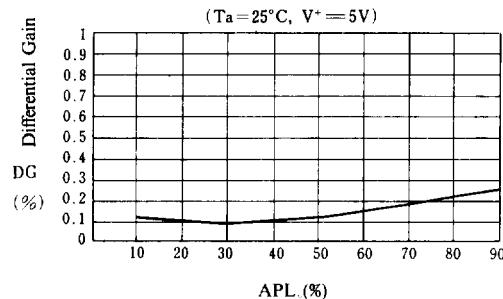 $(T_a = 25^\circ\text{C}, V^+ = 5\text{V})$ 

Differential Phase vs. APL

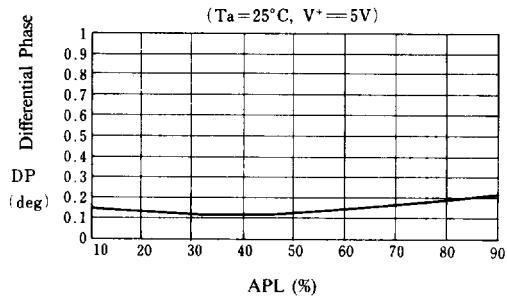 $(T_a = 25^\circ\text{C}, V^+ = 5\text{V})$ 

■ TYPICAL CHARACTERISTICS ( $T_a = +25^\circ\text{C}$ )

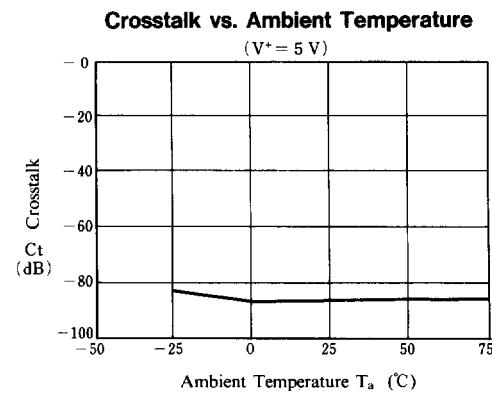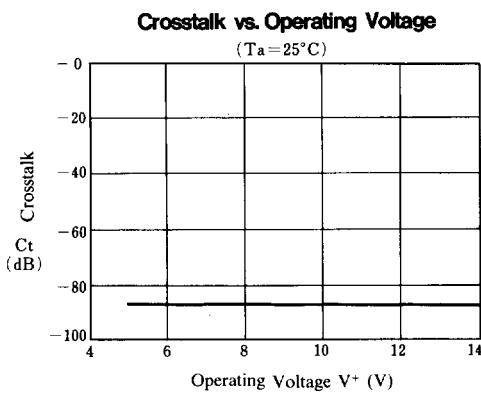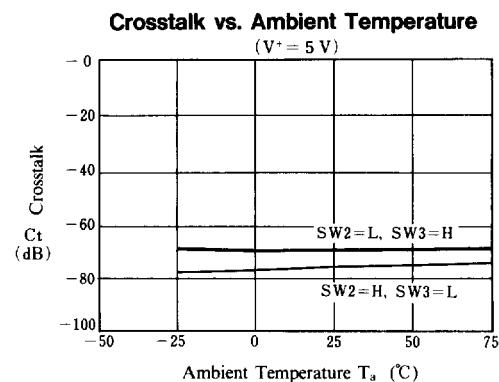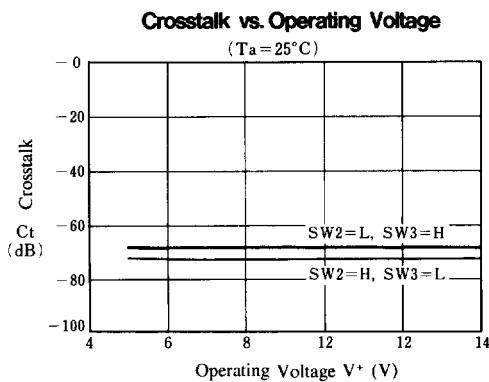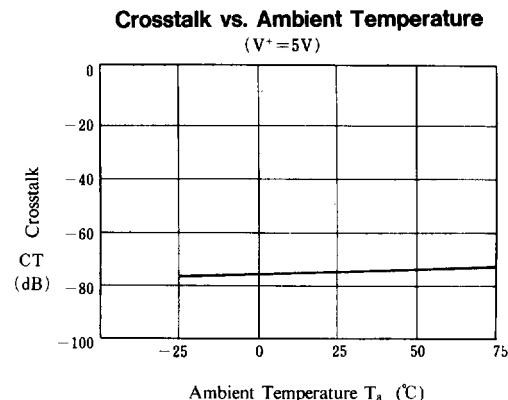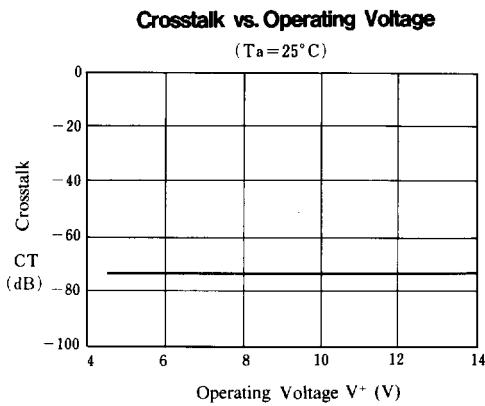



## ■ TYPICAL CHARACTERISTICS ( $T_a = +25^\circ\text{C}$ )

