



## SINGLE-SUPPLY DUAL OPERATIONAL AMPLIFIER

### ■ GENERAL DESCRIPTION


The NJM3404A is high performance single supply dual operational amplifier. The NJM3404A is a half type of the NJM3403A, quad operational amplifier.

The NJM3404A is improved version of the NJM2904 on slew rate & cross-over distortion.

### ■ FEATURES

- Single Supply
- Operating Voltage      (+4V ~ +36V)
- Low Operating Current      (2.0mA typ.)
- Slew Rate      (1.2V/  $\mu$ s typ.)
- Package Outline      DIP8, DMP8, SIP8, SSOP8
- Bipolar Technology

### ■ PACKAGE OUTLINE




NJM3404AD



NJM3404AM




NJM3404AV




NJM3404AL

\*S-Type (SIP-9) available

### ■ PIN CONFIGURATION



NJM3404AD  
NJM3404AM  
NJM3404AV




NJM3404AL

#### PIN FUNCTION

1. A OUTPUT
2. A-INPUT
3. A+ INPUT
4. V-
5. B+ INPUT
6. B-INPUT
7. B OUTPUT
8. V'

4

### ■ EQUIVALENT CIRCUIT (1/2 Shown)

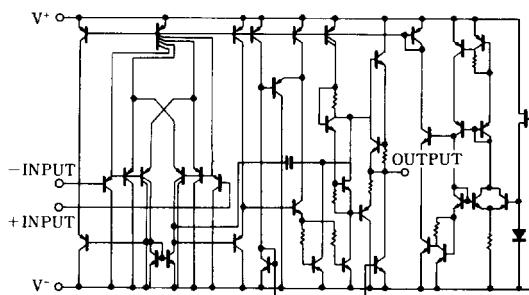



## ■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER                   | SYMBOL   | RATINGS     | UNIT |
|-----------------------------|--|-------------|------|
| Supply Voltage              | V <sup>+</sup> (V <sup>+</sup> /V <sup>-</sup> ) | 36V(or ±18) | V    |
| Differential Input Voltage  | V <sub>ID</sub>                                  | 36          | V    |
| Input Voltage               | V <sub>I</sub>                                   | -0.3~36     | V    |
|                             |  | (DIP8) 500  | mW   |
| Power Dissipation           | P <sub>D</sub>                                   | (DMP8) 300  | mW   |
|                             |  | (SSOP8) 250 | mW   |
|                             |  | (SIP8) 800  | mW   |
| Operating Temperature Range | T <sub>opr</sub>                                 | -20~+75     | °C   |
| Storage Temperature Range   | T <sub>stg</sub>                                 | -40~+125    | °C   |


## ■ ELECTRICAL CHARACTERISTICS

(Ta=25°C, V<sup>+</sup>/V<sup>-</sup>=±15V)


| PARAMETER                       | SYMBOL              | TEST CONDITION   | MIN.    | TYP. | MAX. | UNIT |
|---------------------------------|---------------------|--|---------|------|------|------|
| Input Offset Voltage            | V <sub>IO</sub>     | R <sub>S</sub> =0Ω   | —       | 2    | 5    | mV   |
| Input Offset Current            | I <sub>IO</sub>     |  | —       | 5    | 50   | nA   |
| Input Bias Current              | I <sub>B</sub>      |  | —       | 70   | 200  | nA   |
| Large Signal Voltage Gain       | A <sub>V</sub>      | R <sub>L</sub> >2kΩ  | 88      | 100  | —    | dB   |
| Maximum Output Voltage Swing    | V <sub>OM</sub>     | R <sub>L</sub> =2kΩ  | ±13     | ±14  | —    | V    |
| Input Common Mode Voltage Range | V <sub>ICM</sub>    |  | -15~+13 | —    | —    | V    |
| Common Mode Rejection Ratio     | CMR                 | DC   | 70      | 90   | —    | dB   |
| Supply Voltage Rejection Ratio  | SVR                 |  | 80      | 94   | —    | dB   |
| Operating Current               | I <sub>CC</sub>     | R <sub>L</sub> =∞  | —       | 2.0  | 3.5  | mA   |
| Output Source Current           | I <sub>SOURCE</sub> | V <sub>IN</sub> <sup>+</sup> =1V, V <sub>IN</sub> <sup>-</sup> =0V | 20      | 30   | —    | mA   |
| Output Sink Current             | I <sub>SINK</sub>   | V <sub>IN</sub> <sup>+</sup> =0V, V <sub>IN</sub> <sup>-</sup> =1V | 10      | 20   | —    | mA   |
| Slew Rate                       | SR                  |  | —       | 1.2  | —    | v/μs |
| Unity Gain Bandwidth            | f <sub>T</sub>      | —  | —       | 1.2  | —    | MHz  |

## ■ TYPICAL CHARACTERISTICS


### Voltage Gain vs. Frequency

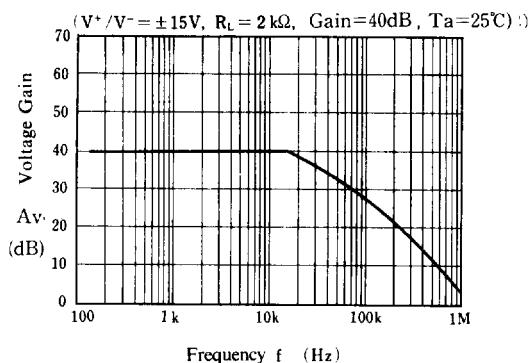


### Maximum Output Voltage Swing vs. Load Resistance

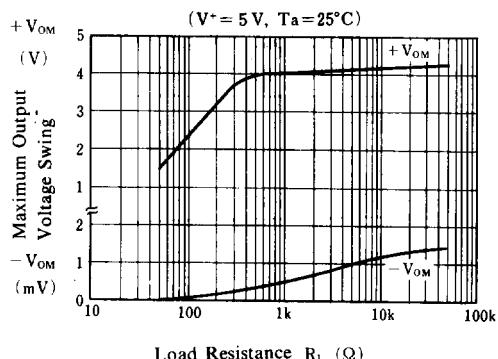


### Operating Current vs. Temperature

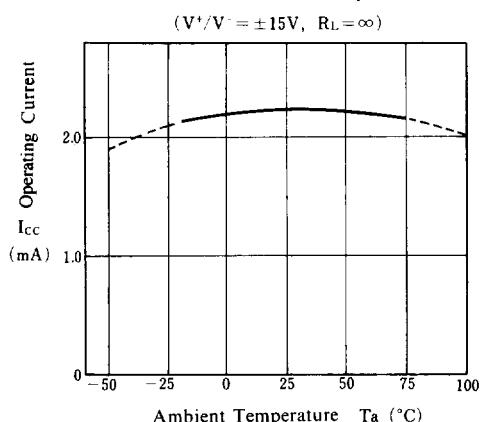


### Output Source Current vs. Temperature

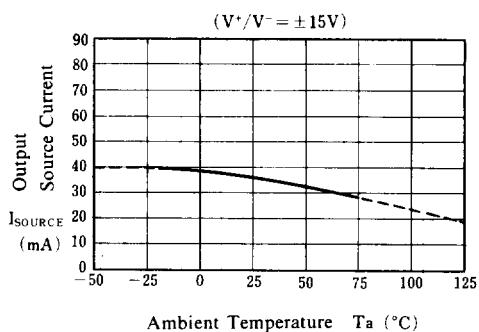

### Input Offset Voltage vs. Temperature

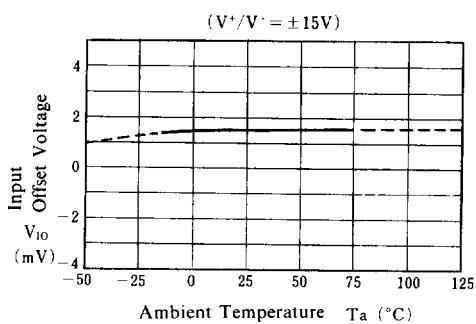

### Input Bias Current vs. Temperature

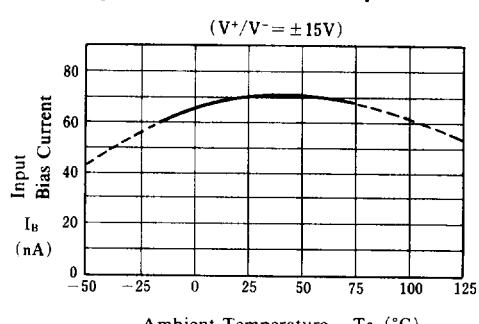





## ■ TYPICAL CHARACTERISTICS

### Output Source Current Output Sink Current vs. Output Voltage Swing

( $V^+/V^- = \pm 15V$ ,  $T_a = 25^\circ C$ )

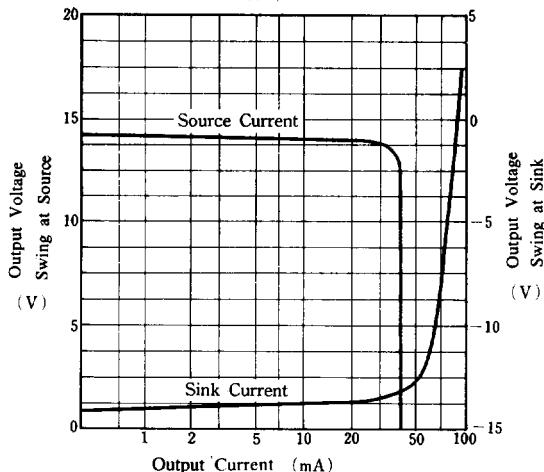


### Operating Current vs. Operating Voltage

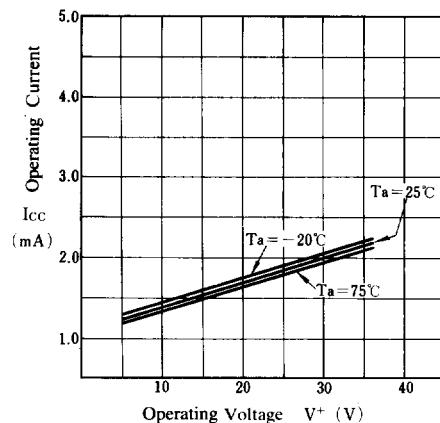


### Output Voltage Swing vs. Operating Voltage

( $R_L = 2k\Omega$ ,  $T_a = 25^\circ C$ )

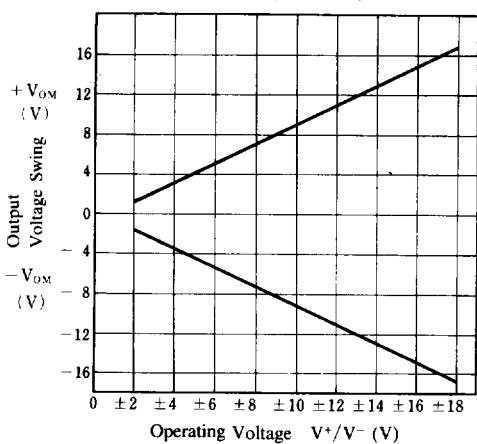


### Pulse Response

( $V^+/V^- = \pm 15V$ ,  $R_L > 2k\Omega$ ,  $A_v = 1$ ,  $T_a = 25^\circ C$ )

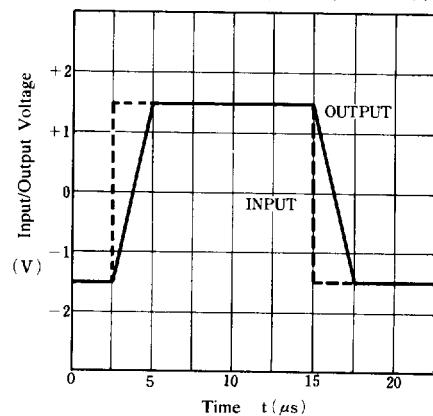


### Maximum Output Voltage vs. Frequency

( $V^+/V^- = \pm 15V$ ,  $R_L = 2k\Omega$ ,  $T_a = 25^\circ C$ )

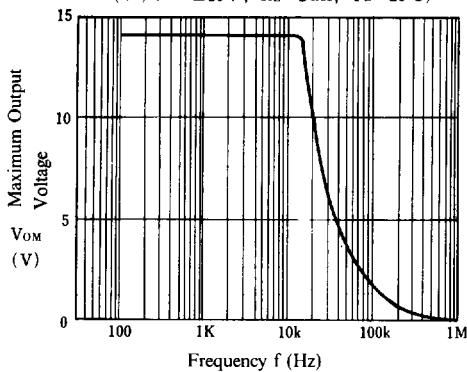

### Maximum Output Voltage vs. Temperature

( $V^+/V^- = \pm 15V$ ,  $R_L = 2k\Omega$ )

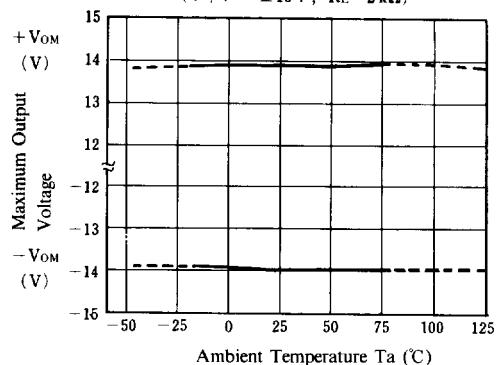

## ■ TYPICAL APPLICATIONS

Square Wave Oscillator

