



3-TERMINAL POSITIVE VOLTAGE REGULATOR

■ GENERAL DESCRIPTION

The NJM78L00 series of 3-Terminal Positive Voltage Regulators is constructed using the New JRC Planar epitaxial process. These regulators employ internal current-limiting and thermal-shutdown, making them essentially indestructible. If adequate heat sinking is provided, they can deliver up to 100mA output current. They are intended as fixed voltage regulators in a wide range of applications including local or on-card regulation for elimination of noise and distribution problems associated with single-point regulation. In addition, they can be used with power pass elements to make high-current voltage regulators. The NJM78L00 series used as a Zener diode/resistor combination replacement, offers an effective output impedance improvement of typically two orders of magnitude, along with lower quiescent current and lower noise.


■ PACKAGE OUTLINE

(TO-92)



NJM78L00A

(SOT-89)



NJM78L00UA


- 1 . OUT
- 2 . GND
- 3 . IN

- 1 . OUT
- 2 . GND
- 3 . IN

■ FEATURES

- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Excellent Ripple Rejection
- Guaranteed 100mA Output Current
- Package Outline TO-92, SOT-89
- Bipolar Technology

■ EQUIVALENT CIRCUIT

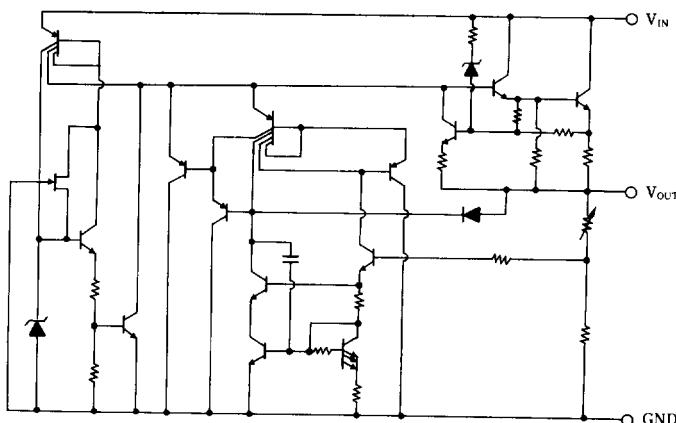



■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V _{IN}	(78L02A~78L09A)30	V
		(78L12A~78L15A)35	V
		(78L18A~78L24A)40	V
Output Current	I _O	100	mA
Power Dissipation	P _D	(TO92) 500	mW
		(SOT89) 350	mW
Operating Temperature Range	T _{opr}	-30~+75	°C
Storage Temperature Range	T _{stg}	-40~+125	°C

■ ELECTRICAL CHARACTERISTICS (C_{IN}=0.33 μf, C_O=0.1 μf, T_j=25°C) Measurement is to be conducted in pulse testing.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
NJM78L02A	V _O	V _{IN} =9V, I _O =400mA	2.47	2.6	2.73	V
	ΔV _O -V _{IN1}	V _{IN} =4.75~20V, I _O =40mA	—	—	125	mV
	ΔV _O -V _{IN2}	V _{IN} =5~20V, I _O =40mA	—	—	100	mV
	ΔV _O -I _{O1}	V _{IN} =9V, I _O =1~40mA	—	—	25	mV
	ΔV _O -I _{O2}	V _{IN} =9V, I _O =1~100mA	—	—	50	mV
	I _Q	V _{IN} =9V, I _O =0mA	—	2.0	6	mA
	ΔV _O /ΔT	V _{IN} =9V, I _O =1mA	—	0.2	—	mV/°C
	RR	6V<V _{IN} <16V, I _O =40mA, e _{in} =1V _{p-p} , f=120Hz	43	73	—	dB
	V _{NO}	BW=10Hz~100kHz, V _{IN} =9V, I _O =40mA	—	35	—	μV
NJM78L05A	V _O	V _{IN} =10V, I _O =40mA	4.75	5	5.25	V
	ΔV _O -V _{IN1}	V _{IN} =7~20V, I _O =40mA	—	—	200	mV
	ΔV _O -V _{IN2}	V _{IN} =8~20V, I _O =40mA	—	—	150	mV
	ΔV _O -I _{O1}	V _{IN} =10V, I _O =1~40mA	—	—	30	mV
	ΔV _O -I _{O2}	V _{IN} =10V, I _O =1~100mA	—	—	60	mV
	I _Q	V _{IN} =10V, I _O =0mA	—	2.0	6	mA
	ΔV _O /ΔT	V _{IN} =10V, I _O =1mA	—	0.4	—	mV/°C
	RR	8V<V _{IN} <18V, I _O =40mA, e _{in} =1V _{p-p} , f=120Hz	40	69	—	dB
	V _{NO}	BW=10Hz~100kHz, V _{IN} =10V, I _O =40mA	—	70	—	μV


ELECTRICAL CHARACTERISTICS ($C_{IN}=0.33\ \mu F$, $C_O=0.1\ \mu F$, $T_j=25^\circ C$) Measurement is to be conducted in pulse testing.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
NJM78L06A						
Output Voltage	V_O	$V_{IN}=12V$, $I_O=40mA$	5.7	6	6.3	V
Line Regulation 1	$\Delta V_O - V_{IN1}$	$V_{IN}=8.5\sim20V$, $I_O=40mA$	—	—	200	mV
Line Regulation 2	$\Delta V_O - V_{IN2}$	$V_{IN}=9\sim20V$, $I_O=40mA$	—	—	150	mV
Load Regulation 1	$\Delta V_O - I_{O1}$	$V_{IN}=12V$, $I_O=1\sim40mA$	—	—	40	mV
Load Regulation 2	$\Delta V_O - I_{O2}$	$V_{IN}=12V$, $I_O=1\sim100mA$	—	—	80	mV
Quiescent Current	I_Q	$V_{IN}=12V$, $I_O=0mA$	—	2.0	6	mA
Average Temperature Coefficient of Output Voltage	$\Delta V_O / \Delta T$	$V_{IN}=12V$, $I_O=1mA$	—	0.5	—	mV/°C
Ripple Rejections	RR	$9V < V_{IN} < 20V$, $I_O=40mA$, $e_{in}=1V_{P-P}$, $f=120Hz$	40	67	—	dB
Output Noise Voltage	V_{NO}	$BW=10Hz\sim100kHz$, $V_{IN}=12V$, $I_O=40mA$	—	80	—	μV
NJM78L08A						
Output Voltage	V_O	$V_{IN}=14V$, $I_O=40mA$	7.6	8	8.4	V
Line Regulation 1	$\Delta V_O - V_{IN1}$	$V_{IN}=10.5\sim23V$, $I_O=40mA$	—	—	225	mV
Line Regulation 2	$\Delta V_O - V_{IN2}$	$V_{IN}=11\sim23V$, $I_O=40mA$	—	—	175	mV
Load Regulation 1	$\Delta V_O - I_{O1}$	$V_{IN}=14V$, $I_O=1\sim40mA$	—	—	50	mV
Load Regulation 2	$\Delta V_O - I_{O2}$	$V_{IN}=14V$, $I_O=1\sim100mA$	—	—	100	mV
Quiescent Current	I_Q	$V_{IN}=14V$, $I_O=0mA$	—	2.1	6	mA
Average Temperature Coefficient of Output Voltage	$\Delta V_O / \Delta T$	$V_{IN}=14V$, $I_O=1mA$	—	0.6	—	mV/°C
Ripple Rejections	RR	$11V < V_{IN} < 20V$, $I_O=40mA$, $e_{in}=1V_{P-P}$, $f=120Hz$	39	66	—	dB
Output Noise Voltage	V_{NO}	$BW=10Hz\sim100kHz$, $V_{IN}=14V$, $I_O=40mA$	—	115	—	μV
NJM78L09A						
Output Voltage	V_O	$V_{IN}=15V$, $I_O=40mA$	8.55	9	9.45	V
Line Regulation 1	$\Delta V_O - V_{IN1}$	$V_{IN}=11.5\sim23V$, $I_O=40mA$	—	—	250	mV
Line Regulation 2	$\Delta V_O - V_{IN2}$	$V_{IN}=12\sim23V$, $I_O=40mA$	—	—	200	mV
Load Regulation 1	$\Delta V_O - I_{O1}$	$V_{IN}=15V$, $I_O=1\sim40mA$	—	—	50	mV
Load Regulation 2	$\Delta V_O - I_{O2}$	$V_{IN}=15V$, $I_O=1\sim100mA$	—	—	100	mV
Quiescent Current	I_Q	$V_{IN}=15V$, $I_O=0mA$	—	2.1	6	mA
Average Temperature Coefficient of Output Voltage	$\Delta V_O / \Delta T$	$V_{IN}=15V$, $I_O=1mA$	—	0.65	—	mV/°C
Ripple Rejections	RR	$12V < V_{IN} < 21V$, $I_O=40mA$, $e_{in}=1V_{P-P}$, $f=120Hz$	38	65	—	dB
Output Noise Voltage	V_{NO}	$BW=10Hz\sim100kHz$, $V_{IN}=15V$, $I_O=40mA$	—	125	—	μV
NJM78L12A						
Output Voltage	V_O	$V_{IN}=19V$, $I_O=40mA$	11.4	12	12.6	V
Line Regulation 1	$\Delta V_O - V_{IN1}$	$V_{IN}=14.5\sim27V$, $I_O=40mA$	—	—	250	mV
Line Regulation 2	$\Delta V_O - V_{IN2}$	$V_{IN}=16\sim27V$, $I_O=40mA$	—	—	200	mV
Load Regulation 1	$\Delta V_O - I_{O1}$	$V_{IN}=19V$, $I_O=1\sim40mA$	—	—	50	mV
Load Regulation 2	$\Delta V_O - I_{O2}$	$V_{IN}=19V$, $I_O=1\sim100mA$	—	—	100	mV
Quiescent Current	I_Q	$V_{IN}=19V$, $I_O=0mA$	—	2.1	6.5	mA
Average Temperature Coefficient of Output Voltage	$\Delta V_O / \Delta T$	$V_{IN}=19V$, $I_O=1mA$	—	0.9	—	mV/°C
Ripple Rejections	RR	$15V < V_{IN} < 25V$, $I_O=40mA$, $e_{in}=1V_{P-P}$, $f=120Hz$	37	62	—	dB
Output Noise Voltage	V_{NO}	$BW=10Hz\sim100kHz$, $V_{IN}=19V$, $I_O=40mA$	—	160	—	μV




■ ELECTRICAL CHARACTERISTICS ($C_{IN}=0.33\ \mu F$, $C_O=0.1\ \mu F$, $T_j=25^\circ C$) Measurement is to be conducted in pulse testing.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
NJM78L15A						
Output Voltage	V_O	$V_{IN}=23V, I_O=40mA$	14.3	15	15.7	V
Line Regulation 1	$\Delta V_O - V_{IN1}$	$V_{IN}=17.5\sim30V, I_O=40mA$	—	—	300	mV
Line Regulation 2	$\Delta V_O - V_{IN2}$	$V_{IN}=20\sim30V, I_O=40mA$	—	—	250	mV
Load Regulation 1	$\Delta V_O - I_{O1}$	$V_{IN}=23V, I_O=1\sim40mA$	—	—	75	mV
Load Regulation 2	$\Delta V_O - I_{O2}$	$V_{IN}=23V, I_O=1\sim100mA$	—	—	150	mV
Quiescent Current	I_Q	$V_{IN}=23V, I_O=0mA$	—	2.2	6.5	mA
Average Temperature Coefficient of Output Voltage	$\Delta V_O / \Delta T$	$V_{IN}=23V, I_O=1mA$	—	1.0	—	mV/°C
Ripple Rejections	RR	$18.5V < V_{IN} < 28.5V, I_O=40mA, e_{in}=1V_{P-P}, f=120Hz$	34	60	—	dB
Output Noise Voltage	V_{NO}	$BW=10Hz\sim100kHz, V_{IN}=23V, I_O=40mA$	—	190	—	μV
NJM78L18A						
Output Voltage	V_O	$V_{IN}=27V, I_O=40mA$	17.1	18	18.9	V
Line Regulation 1	$\Delta V_O - V_{IN1}$	$V_{IN}=22\sim33V, I_O=40mA$	—	—	320	mV
Line Regulation 2	$\Delta V_O - V_{IN2}$	$V_{IN}=23\sim33V, I_O=40mA$	—	—	270	mV
Load Regulation 1	$\Delta V_O - I_{O1}$	$V_{IN}=27V, I_O=1\sim40mA$	—	—	80	mV
Load Regulation 2	$\Delta V_O - I_{O2}$	$V_{IN}=27V, I_O=1\sim100mA$	—	—	160	mV
Quiescent Current	I_Q	$V_{IN}=27V, I_O=0mA$	—	2.2	6.5	mA
Average Temperature Coefficient of Output Voltage	$\Delta V_O / \Delta T$	$V_{IN}=27V, I_O=1mA$	—	1.1	—	mV/°C
Ripple Rejections	RR	$23V < V_{IN} < 33V, I_O=40mA, e_{in}=1V_{P-P}, f=120Hz$	33	59	—	dB
Output Noise Voltage	V_{NO}	$BW=10Hz\sim100kHz, V_{IN}=27V, I_O=40mA$	—	230	—	μV
NJM78L20A						
Output Voltage	V_O	$V_{IN}=29V, I_O=40mA$	19.0	20	21	V
Line Regulation 1	$\Delta V_O - V_{IN1}$	$V_{IN}=23\sim34V, I_O=40mA$	—	—	330	mV
Line Regulation 2	$\Delta V_O - V_{IN2}$	$V_{IN}=24\sim34V, I_O=40mA$	—	—	280	mV
Load Regulation 1	$\Delta V_O - I_{O1}$	$V_{IN}=29V, I_O=1\sim40mA$	—	—	90	mV
Load Regulation 2	$\Delta V_O - I_{O2}$	$V_{IN}=29V, I_O=1\sim100mA$	—	—	180	mV
Quiescent Current	I_Q	$V_{IN}=29V, I_O=1mA$	—	2.3	7	mA
Average Temperature Coefficient of Output Voltage	$\Delta V_O / \Delta T$	$V_{IN}=29V, I_O=1mA$	—	1.2	—	mV/°C
Ripple Rejections	RR	$24V < V_{IN} < 34V, I_O=40mA, e_{in}=1V_{P-P}, f=120Hz$	32	58	—	dB
Output Noise Voltage	V_{NO}	$BW=10Hz\sim100kHz, V_{IN}=29V, I_O=40mA$	—	250	—	μV
NJM78L24A						
Output Voltage	V_O	$V_{IN}=33V, I_O=40mA$	22.8	24	25.2	V
Line Regulation 1	$\Delta V_O - V_{IN1}$	$V_{IN}=27\sim38V, I_O=40mA$	—	—	350	mV
Line Regulation 2	$\Delta V_O - V_{IN2}$	$V_{IN}=28\sim38V, I_O=40mA$	—	—	300	mV
Load Regulation 1	$\Delta V_O - I_{O1}$	$V_{IN}=33V, I_O=1\sim40mA$	—	—	100	mV
Load Regulation 2	$\Delta V_O - I_{O2}$	$V_{IN}=33V, I_O=1\sim100mA$	—	—	200	mV
Quiescent Current	I_Q	$V_{IN}=33V, I_O=0mA$	—	2.3	7	mA
Average Temperature Coefficient of Output Voltage	$\Delta V_O / \Delta T$	$V_{IN}=33V, I_O=1mA$	—	1.4	—	mV/°C
Ripple Rejections	RR	$27.5V < V_{IN} < 37.5V, I_O=40mA, e_{in}=1V_{P-P}, f=120Hz$	32	57	—	dB
Output Noise Voltage	V_{NO}	$BW=10Hz\sim100kHz, V_{IN}=33V, I_O=40mA$	—	280	—	μV



■ SOT-89 MARK

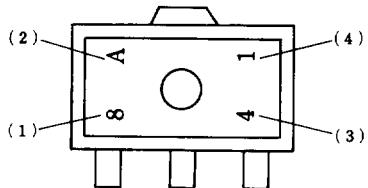

(1)8: Positive Output
(2)Vo Rank
(3)The end of A.D.
(4)Production Month

Oct. ...X
Nov. ...Y
Dec. ...Z


	(1)	(2)
NJM78L02UA	8	A
NJM78L05UA	8	C
NJM78L06UA	8	E
NJM78L08UA	8	G
NJM78L09UA	8	H
NJM78L12UA	8	K
NJM78L15UA	8	L
NJM78L18UA	8	M
NJM78L20UA	8	N
NJM78L24UA	8	P




NJM78L00

■ TEST CIRCUIT

1. Output Voltage, Line Regulation, Load Regulation, Quiescent Current, Average Temperature Coefficient of Output Voltage, Output Noise Voltage, Peak Output/Short-Circuit Current
2. Ripple Rejection

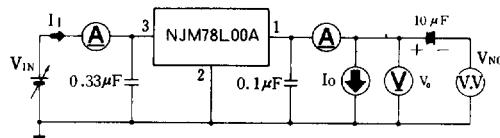


○ Measurement is to be conducted in pulse testing.
○ $I_Q = I_I - I_o$

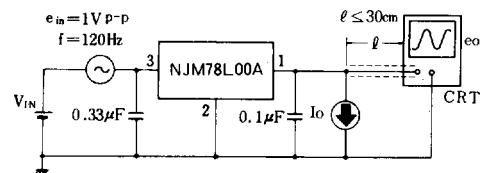

$$RR = 20 \log_{10} \left(\frac{e_{in}}{e_o} \right) \text{ (dB)}$$

■ AMBIENT TEMPERATURE VS. POWER DISSIPATION

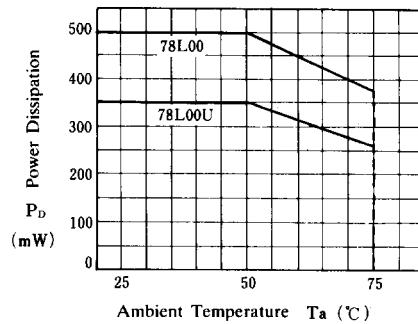




■ TYPICAL CHARACTERISTICS


**NJM78L05/L12/L24
Output Characteristics**

($I_o = 0 \text{ mA}$, $T_j = 25^\circ\text{C}$)

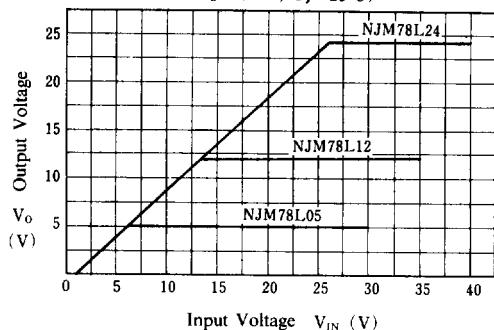


NJM78L05 Dropout Characteristics

($T_j = 25^\circ\text{C}$)

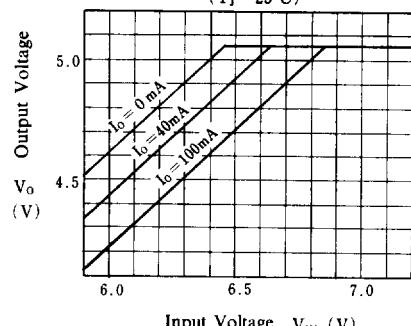


**NJM78L00 Series Short Circuit
Output Current**

($T_j = 25^\circ\text{C}$)

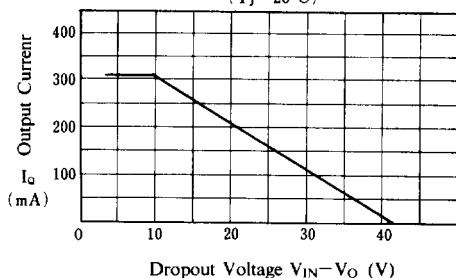


**NJM78L02/L24 Quiescent Current
vs. Output Current**

($T_j = 25^\circ\text{C}$)

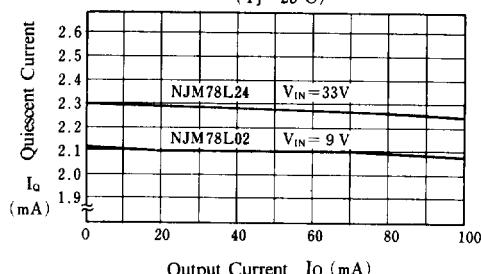

**NJM78L05 Quiescent Current
vs. Input Voltage**

($I_o = 0 \text{ mA}$, $T_j = 25^\circ\text{C}$)

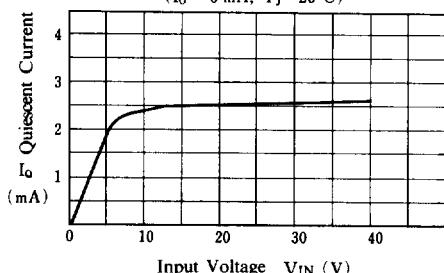



NJM78L00

■ TYPICAL CHARACTERISTICS

