


Intellimod™ Module

Three Phase + Brake
IGBT Inverter Output
200 Amperes/600 Volts

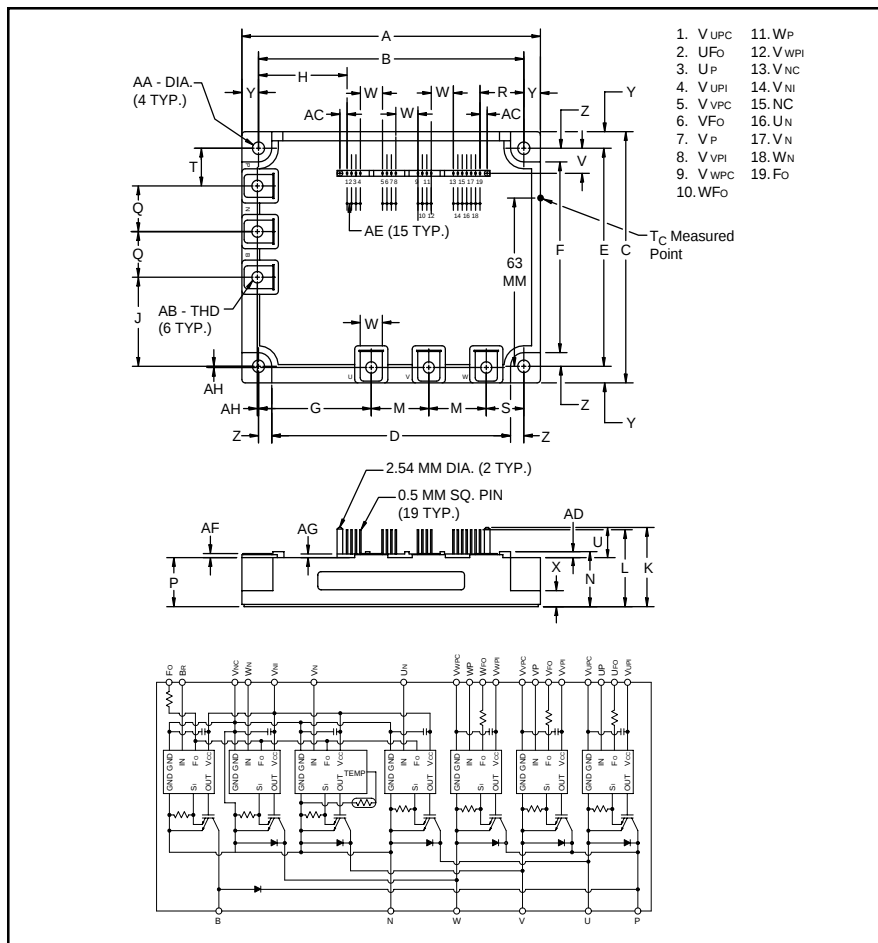

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	5.31±0.04	135.0±1.0
B	4.74±0.02	120.5±0.5
C	4.33±0.04	110.0±1.0
D	4.27	10.5
E	3.76±0.02	95.5±0.5
F	3.29	83.5
G	2.01	51.0
H	1.602	40.68
J	1.56	39.5
K	1.37	34.7
L	1.33	33.7
M	1.02	26.0
N	0.95 +0.06/-0.0	24.1 +1.5/-0.0
P	0.85	21.5
Q	0.79	20.0
R	0.780	19.82

Dimensions	Inches	Millimeters
S	0.69	17.5
T	0.65	16.5
U	0.52	13.2
V	0.43	11.0
W	0.41	10.5
X	0.30	7.7
Y	0.285	7.25
Z	0.24	6.0
AA	0.22 Dia.	Dia. 5.5
AD	Metric M5	M5
AC	0.128	3.22
AD	0.10	2.6
AE	0.08	2.0
AF	0.07	1.8
AG	0.06	1.6
AH	0.02	0.5



Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

Features:

- ☐ Complete Output Power Circuit
- ☐ Gate Drive Circuit
- ☐ Protection Logic
 - Short Circuit
 - Over Current
 - Over Temperature
 - Under Voltage
- ☐ Low Loss Using 4th Generation IGBT Chip

Applications:

- ☐ Inverters
- ☐ UPS
- ☐ Motion/Servo Control
- ☐ Power Supplies

Ordering Information:

Example: Select the complete part number from the table below -i.e. PM200RSD060 is a 600V, 200 Ampere Intellimod™ Intelligent Power Module.

Type	Current Rating Amperes	V _{CES} Volts (x 10)
PM	200	60

PM200RSD060

Intellimod™ Module

Three Phase + Brake IGBT Inverter Output

200 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	PM200RSD060	Units
Power Device Junction Temperature	T_j	-20 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to 125	$^\circ\text{C}$
Case Operating Temperature	T_C	-20 to 100	$^\circ\text{C}$
Mounting Torque, M5 Mounting Screws	—	17	in-lb
Mounting Torque, M5 Main Terminal Screws	—	17	in-lb
Module Weight (Typical)	—	920	Grams
Supply Voltage Protected by OC and SC ($V_D = 13.5 - 16.5\text{V}$, Inverter Part) $T_j = 125^\circ\text{C}$	$V_{\text{CC(prot.)}}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	V_{ISO}	2500	Volts

IGBT Inverter Sector

Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$)	V_{CES}	600	Volts
Collector Current, $\pm$ ($T_C = 25^\circ\text{C}$)	I_C	200	Amperes
Peak Collector Current, $\pm$ ($T_C = 25^\circ\text{C}$)	I_{CP}	400	Amperes
Supply Voltage (Applied between P - N)	V_{CC}	400	Volts
Supply Voltage, Surge (Applied between P - N)	$V_{\text{CC(surge)}}$	500	Volts
Collector Dissipation ($T_C = 25^\circ\text{C}$)	P_C	595	Watts

IGBT Brake Sector

Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$)	V_{CES}	600	Volts
Collector Current, $\pm$ ($T_C = 25^\circ\text{C}$)	I_C	75	Amperes
Peak Collector Current, $\pm$ ($T_C = 25^\circ\text{C}$)	I_{CP}	150	Amperes
FWDi Rated DC Reverse Voltage ($T_C = 25^\circ\text{C}$)	$V_{\text{R(DC)}}$	600	Volts
FWDi Forward Current ($T_C = 25^\circ\text{C}$)	I_F	75	Amperes
Collector Dissipation ($T_C = 25^\circ\text{C}$)	P_C	258	Watts

Control Sector

Supply Voltage Applied between ($V_{\text{UP1}}-V_{\text{UPC}}$, $V_{\text{VP1}}-V_{\text{VPC}}$, $V_{\text{WP1}}-V_{\text{WPC}}$, $V_{\text{N1}}-V_{\text{NC}}$)	V_D	20	Volts
Input Voltage Applied between (U_P-V_{UPC} , V_P-V_{VPC} , W_P-V_{WPC} , $U_N-V_{\text{N}}-W_N-B_r-V_{\text{NC}}$)	V_{CIN}	20	Volts
Fault Output Supply Voltage (Applied between F_O and V_C)	V_{FO}	20	Volts
Fault Output Current (U_{FO} , V_{FO} , W_{FO} , F_O)	I_{FO}	20	mA

PM200RSD060
Intellimod™ Module
Three Phase + Brake IGBT Inverter Output
200 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
IGBT Inverter Sector						
Collector Cutoff Current	I _{CES}	V _{CE} = V _{CES} , T _j = 25°C, V _D = 15V, V _{CIN} = 15V	—	—	1.0	mA
		V _{CE} = V _{CES} , T _j = 125°C V _D = 15V, V _{CIN} = 15V	—	—	10	mA
Diode Forward Voltage	V _{EC}	-I _C = 200A, V _D = 15V, V _{CIN} = 15V	—	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	V _{CE(sat)}	V _D = 15V, V _{CIN} = 0V, I _C = 200A T _j = 25°C	—	1.70	2.3	Volts
		V _D = 15V, V _{CIN} = 0V, I _C = 200A, T _j = 125°C	—	1.70	2.3	Volts
Inductive Load Switching Times	t _{on}	V _D = 15V, V _{CIN} = 0 ~ 15V V _{CC} = 300V, I _C = 200A T _j = 125°C	0.5	0.8	1.5	μS
	t _{rr}		—	0.15	0.3	μS
	t _{C(on)}		—	0.4	1.0	μS
	t _{off}		—	2.0	2.5	μS
	t _{C(off)}		—	0.5	1.0	μS
IGBT Brake Sector						
Collector Cutoff Current	I _{CES}	V _{CE} = V _{CES} , T _j = 25°C, V _D = 15V, V _{CIN} = 15V	—	—	1.0	mA
		V _{CE} = V _{CES} , T _j = 125°C V _D = 15V, V _{CIN} = 15V	—	—	10	mA
FWDi Forward Voltage	V _{FM}	I _F = 75A	—	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	V _{CE(sat)}	V _D = 15V, V _{CIN} = 0V, I _C = 75A, T _j = 25°C	—	2.35	2.80	Volts
		V _D = 15V, V _{CIN} = 0V, I _C = 75A, T _j = 125°C	—	2.55	3.05	Volts

PM200RSD060

Intellimod™ Module

Three Phase + Brake IGBT Inverter Output

200 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Control Sector						
Over Current Trip Level Inverter Part	OC	$-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $V_D = 15\text{V}$	310	400	—	Amperes
Over Current Trip Level Brake Part			115	161	—	Amperes
Short Circuit Trip Level Inverter Part	SC	$-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $V_D = 15\text{V}$	—	560	—	Amperes
Short Circuit Trip Level Brake Part			—	241	—	Amperes
Over Current Delay Time	$t_{\text{off}}(\text{OC})$	$V_D = 15\text{V}$	—	10	—	μS
Over Temperature Protection ($V_D = 15\text{V}$)	OT	Trip Level	111	118	125	$^\circ\text{C}$
	OT_R	Reset Level	—	100	—	$^\circ\text{C}$
Supply Circuit Under Voltage Protection ($-20 \leq T_j \leq 125^\circ\text{C}$)	UV	Trip Level	11.5	12.0	12.5	Volts
	UV_R	Reset Level	—	12.5	—	Volts
Supply Voltage	V_D	Applied between $V_{\text{UP1}}-V_{\text{UPC}}$, $V_{\text{VP1}}-V_{\text{VPC}}$, $V_{\text{WP1}}-V_{\text{WPC}}$, $V_{\text{N1}}-V_{\text{NC}}$	13.5	15	16.5	Volts
Circuit Current	I_D	$V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$, $V_{\text{N1}}-V_{\text{NC}}$	—	52	72	mA
		$V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$, $V_{\text{XP1}}-V_{\text{XPC}}$	—	13	18	mA
Thermal Voltage ON	$V_{\text{th(on)}}$	Applied between	1.2	1.5	1.8	Volts
Thermal Voltage OFF	$V_{\text{th(off)}}$	$U_P, V_P, W_P, U_N, V_N, W_N, B_r-V_{\text{NC}}$	1.7	2.0	2.3	Volts
Input ON Threshold Voltage	$V_{\text{CIN(on)}}$	Applied between	—	—	0.8	Volts
Input OFF Threshold Voltage	$V_{\text{CIN(off)}}$	$U_P, V_P, W_P, U_N, V_N, W_N, B_r-V_{\text{NC}}$	4.0	—	—	Volts
PWM Input Frequency	f_{PWM}	3- ϕ Sinusoidal	—	—	20	kHz
Fault Output Current	$I_{\text{FO(H)}}$	$V_D = 15\text{V}$, $V_{\text{FO}} = 15\text{V}$	—	—	0.01	mA
	$I_{\text{FO(L)}}$	$V_D = 15\text{V}$, $V_{\text{FO}} = 15\text{V}$	—	10	15	mA
Minimum Fault Output Pulse Width	t_{FO}	$V_D = 15\text{V}$	1.0	1.8	—	mS



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM200RSD060
Intellimod™ Module
Three Phase + Brake IGBT Inverter Output
200 Amperes/600 Volts

Thermal Characteristics

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Each Inverter IGBT	—	—	0.21	°C/Watt
	$R_{th(j-c)F}$	Each Inverter FWDi	—	—	0.35	°C/Watt
	$R_{th(j-c)Q}$	Each Brake IGBT	—	—	0.40	°C/Watt
	$R_{th(j-c)F}$	Each Brake FWDi	—	—	1.10	°C/Watt
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module, Thermal Grease Applied	—	—	0.018	°C/Watt

Recommended Conditions for Use

Characteristic	Symbol	Condition	Value	Units
Supply Voltage	V_{CC}	Applied across P-N Terminals	0 ~ 400	Volts
	V_D	Applied between V_{UP1} - V_{UPC} , V_{N1} - V_{NC} , V_{VP1} - V_{VPC} , V_{WP1} - V_{WPC}	15 ± 1.5	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between	0 ~ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	U_P , V_P , W_P , U_N , V_N , W_N , B_r - V_{NC}	$4.0 \sim V_D$	Volts
PWM Input Frequency	f_{PWM}	Using Application Circuit	5 ~ 20	kHz
Minimum Dead Time	t_{DEAD}	Input Signal	≥ 2.0	μS
		$I_F = 12mA$	≥ 4.0	μS


PM200RSD060

Intellimod™ Module


Three Phase + Brake IGBT Inverter Output

200 Amperes/600 Volts


SATURATION VOLTAGE CHARACTERISTICS (TYPICAL) (INVERTER PART)

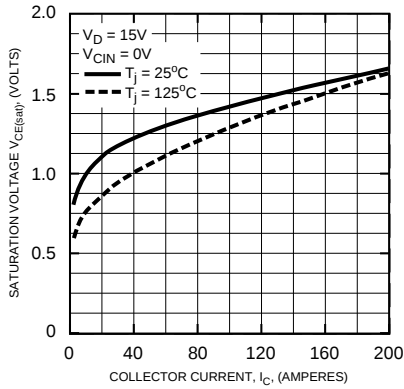


DIODE FORWARD CHARACTERISTICS (INVERTER PART)

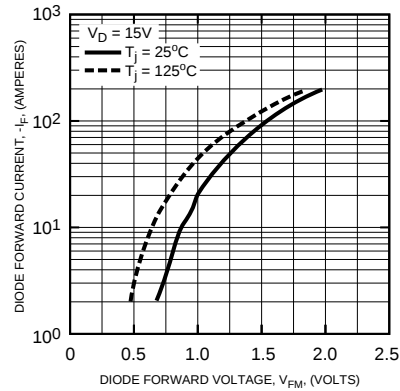


REVERSE RECOVERY CURRENT VS. COLLECTOR CURRENT (TYPICAL)

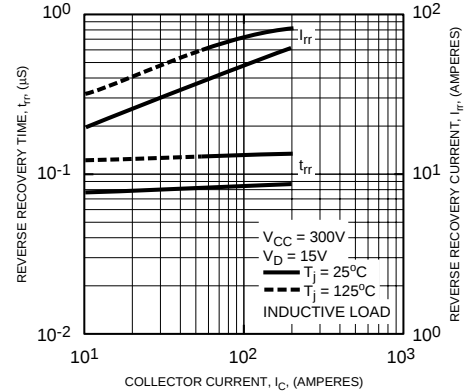

SWITCHING LOSS CHARACTERISTICS

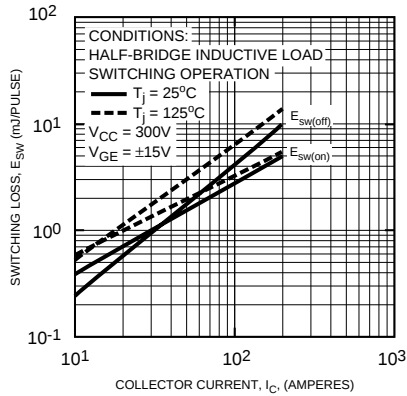

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT & FWDi - INVERTER PART)

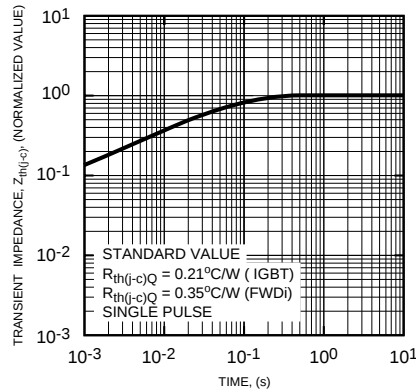

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT & FWDi - BRAKE PART)

