

SN54AHC161, SN74AHC161 4-BIT SYNCHRONOUS BINARY COUNTERS

SCLS367A – MAY 1997 – REVISED JUNE 1997

- Operating Range 2-V to 5.5-V V_{CC}
- **EPIC™** (Enhanced-Performance Implanted CMOS) Process
- Internal Look-Ahead for Fast Counting
- Carry Output for n-Bit Cascading
- Synchronous Counting
- Synchronously Programmable
- Package Options Include Plastic Small-Outline (D), Shrink Small-Outline (DB), Thin Shrink Small-Outline (PW), and Ceramic Flat (W) Packages, Ceramic Chip Carriers (FK), and Standard Plastic (N) and Ceramic (J) 300-mil DIPs

description

These synchronous, presettable counters feature an internal carry look-ahead for application in high-speed counting designs. The 'AHC161 are 4-bit binary counters. Synchronous operation is provided by having all flip-flops clocked simultaneously so that the outputs change coincident with each other when so instructed by the count-enable (ENP, ENT) inputs and internal gating. This mode of operation eliminates the output counting spikes that are normally associated with synchronous (ripple-clock) counters. A buffered clock (CLK) input triggers the four flip-flops on the rising (positive-going) edge of the clock waveform.


These counters are fully programmable; that is, they can be preset to any number between 0 and 9 or 15. As presetting is synchronous, setting up a low level at the load input disables the counter and causes the outputs to agree with the setup data after the next clock pulse, regardless of the levels of the enable inputs.

The clear function for the 'AHC161 is asynchronous. A low level at the clear (\overline{CLR}) input sets all four of the flip-flop outputs low, regardless of the levels of the CLK, load (\overline{LOAD}), or enable inputs.


The carry look-ahead circuitry provides for cascading counters for n-bit synchronous applications without additional gating. Instrumental in accomplishing this function are ENP, ENT, and a ripple-carry output (RCO). Both ENP and ENT must be high to count, and ENT is fed forward to enable RCO. Enabling RCO produces a high-level pulse while the count is maximum (9 or 15 with Q_A high). This high-level overflow ripple-carry pulse can be used to enable successive cascaded stages. Transitions at ENP or ENT are allowed, regardless of the level of CLK.

These counters feature a fully independent clock circuit. Changes at control inputs (ENP, ENT, or \overline{LOAD}) that modify the operating mode have no effect on the contents of the counter until clocking occurs. The function of the counter (whether enabled, disabled, loading, or counting) is dictated solely by the conditions meeting the stable setup and hold times.

SN54AHC161 ... J OR W PACKAGE
SN74AHC161 ... D, DB, N, OR PW PACKAGE
(TOP VIEW)



SN54AHC161 ... FK PACKAGE
(TOP VIEW)

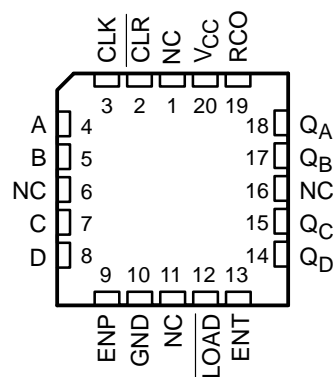

NC – No internal connection

PRODUCT PREVIEW



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

EPIC is a trademark of Texas Instruments Incorporated.

PRODUCT PREVIEW information concerns products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1997, Texas Instruments Incorporated


SN54AHC161, SN74AHC161 4-BIT SYNCHRONOUS BINARY COUNTERS

SCLS367A – MAY 1997 – REVISED JUNE 1997

description (continued)

The SN54AHC161 is characterized for operation over the full military temperature range of –55°C to 125°C. The SN74AHC161 is characterized for operation from –40°C to 85°C.

logic symbol†

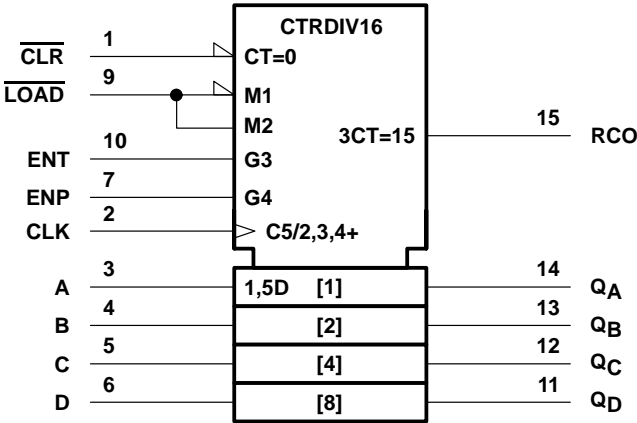


† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12. Pin numbers shown are for the D, DB, J, N, PW, and W packages.

SN54AHC161, SN74AHC161 4-BIT SYNCHRONOUS BINARY COUNTERS

SCLS367A – MAY 1997 – REVISED JUNE 1997

logic diagram (positive logic)

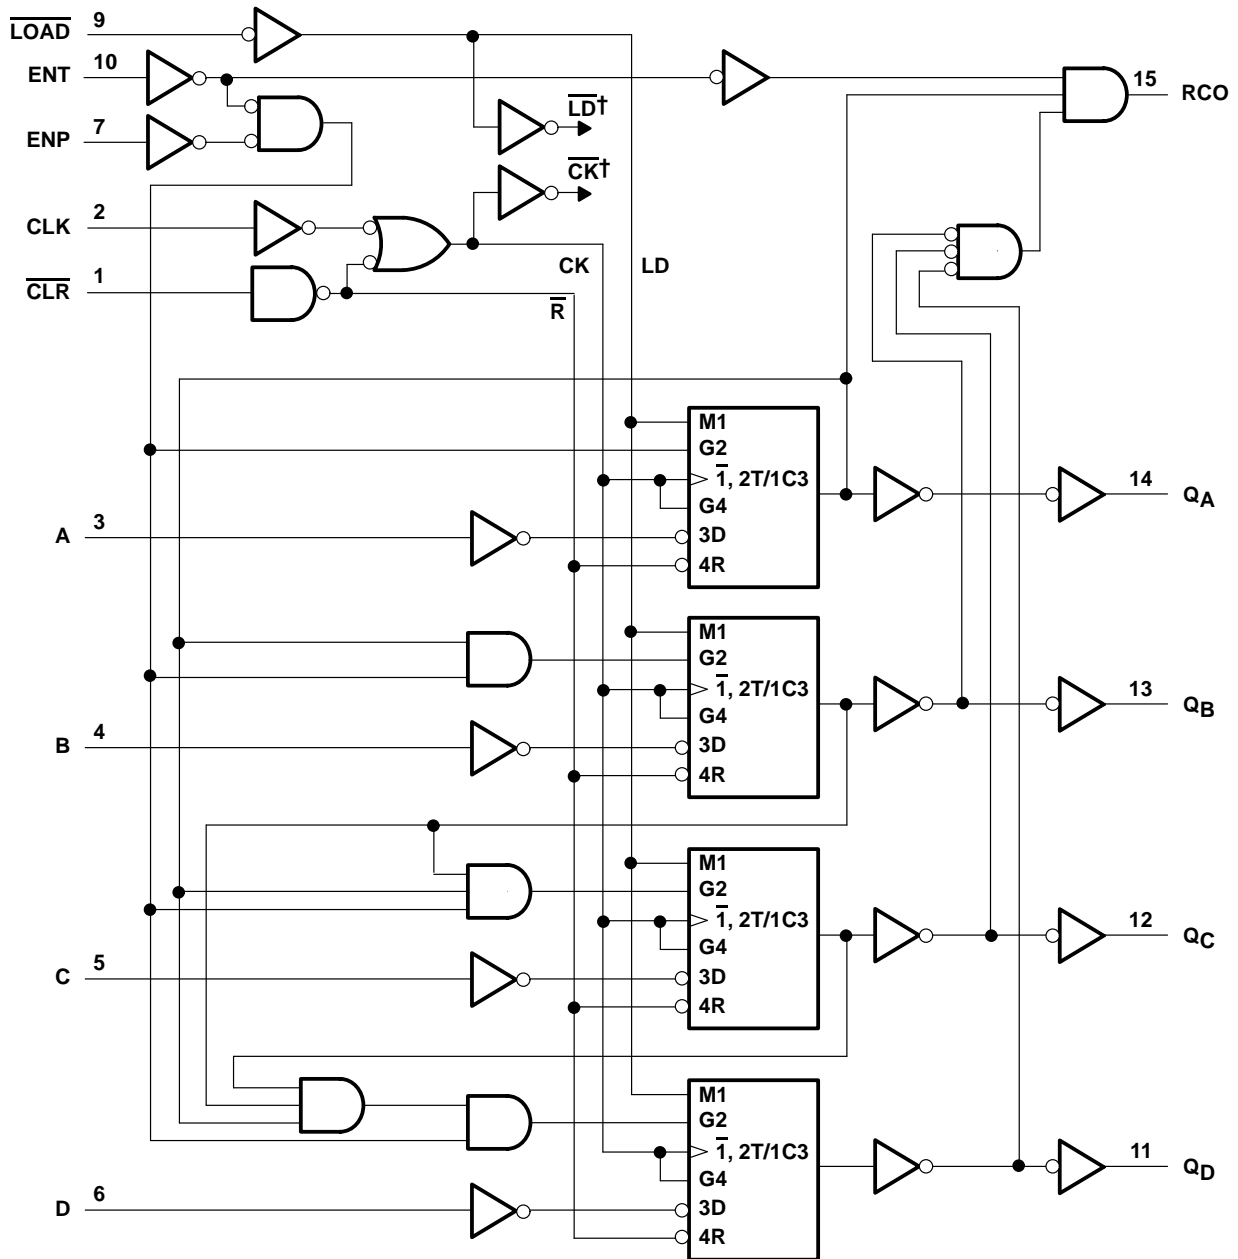

† For simplicity, routing of complementary signals \overline{LD} and \overline{CK} is not shown on this overall logic diagram. The uses of these signals are shown on the logic diagram of the D/T flip-flops.

Pin numbers shown are for the D, DB, J, N, PW, and W packages.

PRODUCT PREVIEW




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


SN54AHC161, SN74AHC161 4-BIT SYNCHRONOUS BINARY COUNTERS

SCLS367A – MAY 1997 – REVISED JUNE 1997

logic symbol, each D/T flip-flop

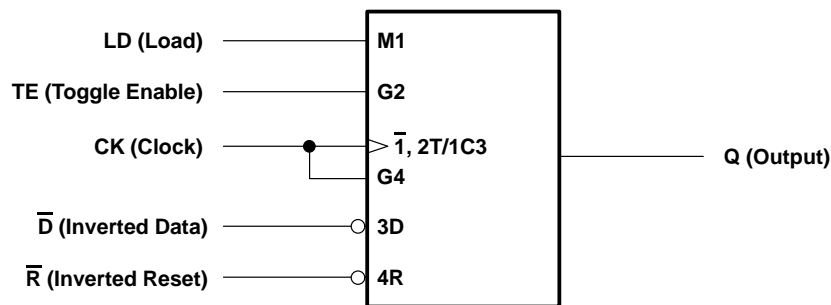

logic diagram, each D/T flip-flop (positive logic)

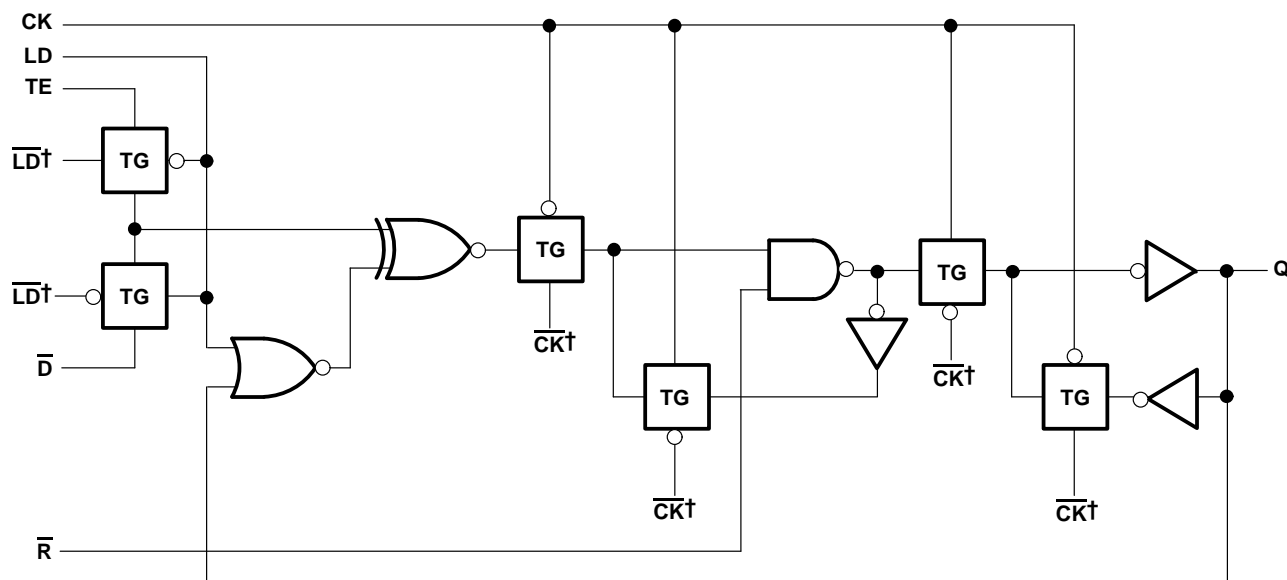


† The origins of \overline{LD} and \overline{CK} are shown in the logic diagram of the overall device.

PRODUCT PREVIEW

typical clear, preset, count, and inhibit sequence

The following sequence is illustrated below:

1. Clear outputs to zero (asynchronous)
2. Preset to binary 12
3. Count to 13, 14, 15, 0, 1, and 2
4. Inhibit

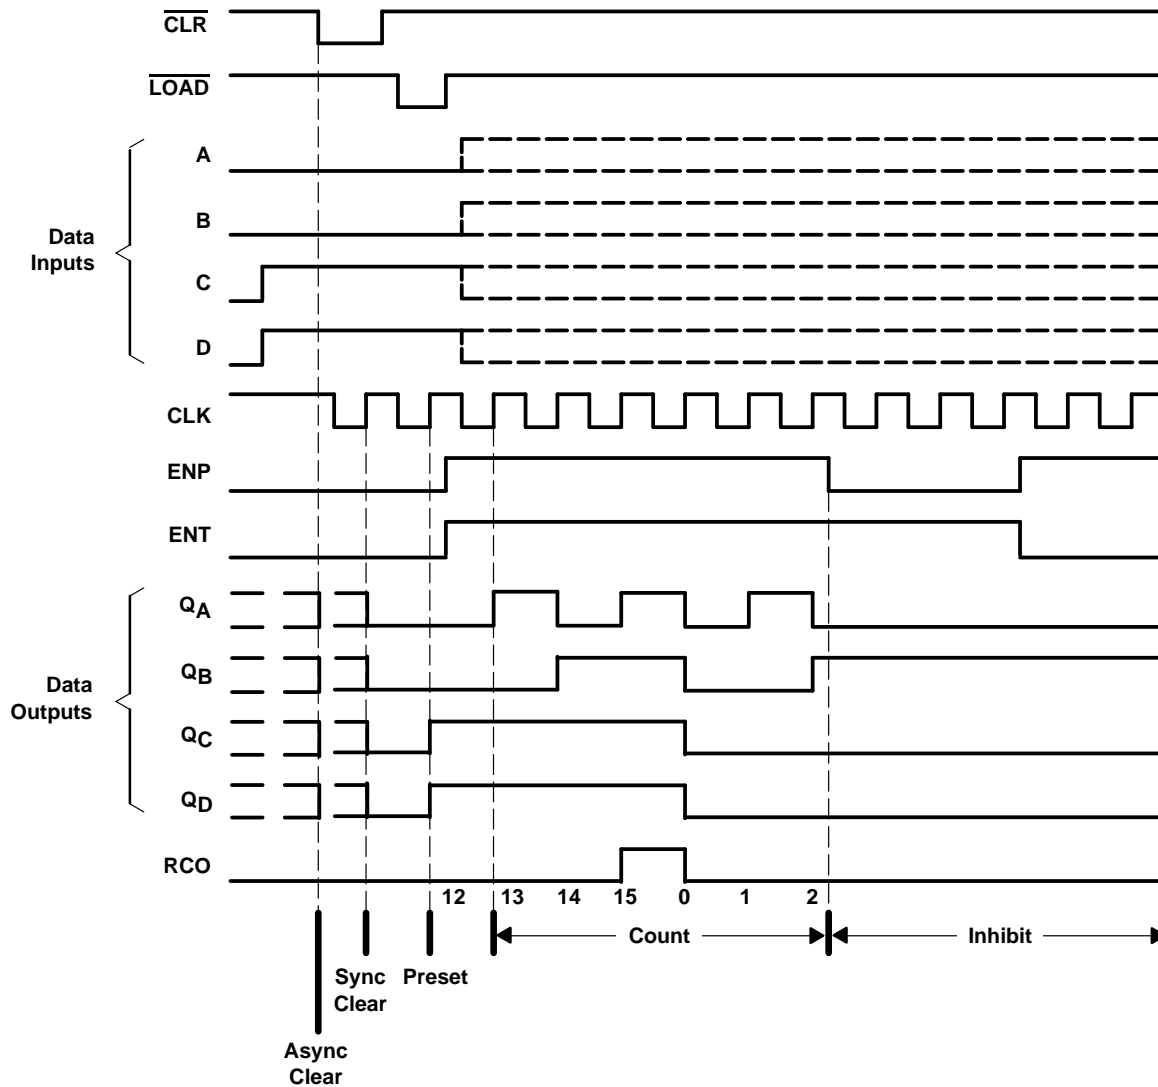

SN54AHC161, SN74AHC161

4-BIT SYNCHRONOUS BINARY COUNTERS

SCLS367A – MAY 1997 – REVISED JUNE 1997

absolute maximum ratings over operating free-air temperature range†

Supply voltage range, V_{CC}	–0.5 V to 7 V
Input voltage range, V_I (see Note 1)	–0.5 V to 7 V
Output voltage range, V_O (see Note 1)	–0.5 V to $V_{CC} + 0.5$ V
Input clamp current, I_{IK} ($V_I < 0$)	–20 mA
Output clamp current, I_{OK} ($V_O < 0$ or $V_O > V_{CC}$)	±20 mA
Continuous output current, I_O ($V_O = 0$ to V_{CC})	±25 mA
Continuous current through V_{CC} or GND	±50 mA
Package thermal impedance, θ_{JA} (see Note 2): D package	113°C/W
DB package	131°C/W
N package	78°C/W
PW package	149°C/W
Storage temperature range, T_{stg}	–65°C to 150°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
2. The package thermal impedance is calculated in accordance with JESD 51, except for through-hole packages, which use a trace length of zero.

recommended operating conditions (see Note 3)

			SN54AHC161		SN74AHC161		UNIT
			MIN	MAX	MIN	MAX	
V _{CC}	Supply voltage		2	5.5	2	5.5	V
V _{IH}	High-level input voltage	V _{CC} = 2 V	1.5		1.5		V
		V _{CC} = 3 V	2.1		2.1		
		V _{CC} = 5.5 V	3.85		3.85		
V _{IL}	Low-level input voltage	V _{CC} = 2 V	0.5		0.5		V
		V _{CC} = 3 V	0.9		0.9		
		V _{CC} = 5.5 V	1.65		1.65		
V _I	Input voltage		0	5.5	0	5.5	V
V _O	Output voltage		0	V _{CC}	0	V _{CC}	V
I _{OH}	High-level output current	V _{CC} = 2 V	−50		−50		μA
		V _{CC} = 3.3 V ± 0.3 V	−4		−4		mA
		V _{CC} = 5 V ± 0.5 V	−8		−8		
I _{OL}	Low-level output current	V _{CC} = 2 V	50		50		μA
		V _{CC} = 3.3 V ± 0.3 V	4		4		mA
		V _{CC} = 5 V ± 0.5 V	8		8		
Δt/Δv	Input transition rise or fall rate	V _{CC} = 3.3 V ± 0.3 V	100		100		ns/V
		V _{CC} = 5 V ± 0.5 V	20		20		
T _A	Operating free-air temperature		−55	125	− 40	85	°C

NOTE 3: Unused inputs must be held high or low to prevent them from floating.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SN54AHC161, SN74AHC161 4-BIT SYNCHRONOUS BINARY COUNTERS

SCLS367A – MAY 1997 – REVISED JUNE 1997

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V _{CC}	T _A = 25°C			SN54AHC161		SN74AHC161		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
V _{OH}	I _{OH} = -50 µA	2 V	1.9	2		1.9		1.9		V
		3 V	2.9	3		2.9		2.9		
		4.5 V	4.4	4.5		4.4		4.4		
	I _{OH} = -4 mA	3 V	2.58			2.48		2.48		
	I _{OH} = -8 mA	4.5 V	3.94			3.8		3.8		
V _{OL}	I _{OL} = 50 µA	2 V			0.1		0.1		0.1	V
		3 V			0.1		0.1		0.1	
		4.5 V			0.1		0.1		0.1	
	I _{OL} = 4 mA	3 V			0.36		0.5		0.44	
	I _{OL} = 8 mA	4.5 V			0.36		0.5		0.44	
I _I	V _I = V _{CC} or GND	5.5 V			±0.1		±1		±1	µA
I _{CC}	V _I = V _{CC} or GND, I _O = 0	5.5 V			4		40		40	µA
C _i	V _I = V _{CC} or GND	5 V		2	10				10	pF

timing requirements over recommended operating free-air temperature range,
V_{CC} = 3.3 V ± 0.3 V (unless otherwise noted) (see Figure 1)

			T _A = 25°C		SN54AHC161		SN74AHC161		UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	
t _w	Pulse duration	CLK high or low	5		5		5		ns
		CLR low	5		5		5		
t _{su}	Setup time before CLK↑	CLR	2.5		2.5		2.5		ns
		Data (A, B, C, and D)	5.5		6.5		6.5		
		ENP, ENT	7.5		9		9		
		LOAD low	8		9.5		9.5		
t _h	Hold time, all synchronous inputs after CLK↑		1		1		1		ns

timing requirements over recommended operating free-air temperature range,
V_{CC} = 5 V ± 0.5 V (unless otherwise noted) (see Figure 1)

			T _A = 25°C		SN54AHC161		SN74AHC161		UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	
t _w	Pulse duration	CLK high or low	5		5		5		ns
		CLR low	5		5		5		
t _{su}	Setup time before CLK↑	CLR	1.5		1.5		1.5		ns
		Data (A, B, C, and D)	4.5		4.5		4.5		
		ENP, ENT	5		6		6		
		LOAD low	5		6		6		
t _h	Hold time, all synchronous inputs after CLK↑		1		1		1		ns

PRODUCT PREVIEW



SN54AHC161, SN74AHC161

4-BIT SYNCHRONOUS BINARY COUNTERS

SCLS367A – MAY 1997 – REVISED JUNE 1997

switching characteristics over recommended operating free-air temperature range,
 $V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$ (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	LOAD CAPACITANCE	SN54AHC161				UNIT
				$T_A = 25^\circ\text{C}$			MIN	MAX
				MIN	TYP	MAX		
f_{max}			$C_L = 15 \text{ pF}^*$	130	80		70	MHz
			$C_L = 50 \text{ pF}$	85	55		50	
t_{PLH}^*	CLK	Q	$C_L = 15 \text{ pF}$	8.3	12.8		1	15
t_{PHL}^*				8.3	12.8		1	15
t_{PLH}^*	CLK	RCO (count mode)	$C_L = 15 \text{ pF}$	8.7	13.6		1	16
t_{PHL}^*				8.7	13.6		1	16
t_{PLH}^*	CLK	RCO (preset mode)	$C_L = 15 \text{ pF}$	11	17.2		1	20
t_{PHL}^*				11	17.2		1	20
t_{PLH}^*	ENT	RCO	$C_L = 15 \text{ pF}$	7.5	12.3		1	14.5
t_{PHL}^*				7.5	12.3		1	14.5
t_{PHL}^*	$\overline{\text{CLR}}$	Q	$C_L = 15 \text{ pF}$	8.9	13.6		1	16
		RCO		8.4	13.2		1	15.5
t_{PLH}	CLK	Q	$C_L = 50 \text{ pF}$	10.8	16.3		1	18.5
t_{PHL}				10.8	16.3		1	18.5
t_{PLH}	CLK	RCO (count mode)	$C_L = 50 \text{ pF}$	11.2	17.1		1	19.5
t_{PHL}				11.2	17.1		1	19.5
t_{PLH}	CLK	RCO (preset mode)	$C_L = 50 \text{ pF}$	13.5	20.7		1	23.5
t_{PHL}				13.5	20.7		1	23.5
t_{PLH}	ENT	RCO	$C_L = 50 \text{ pF}$	10.5	15.8		1	18
t_{PHL}				10.5	15.8		1	18
t_{PHL}	$\overline{\text{CLR}}$	Q	$C_L = 50 \text{ pF}$	11.2	17.1		1	19.5
		RCO		10.9	16.7		1	19

* On products compliant to MIL-PRF-38535, this parameter is ensured but not production tested.

PRODUCT PREVIEW



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SN54AHC161, SN74AHC161 4-BIT SYNCHRONOUS BINARY COUNTERS

SCLS367A – MAY 1997 – REVISED JUNE 1997

switching characteristics over recommended operating free-air temperature range,
 $V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$ (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	LOAD CAPACITANCE	SN74AHC161					UNIT
				T _A = 25°C			MIN	MAX	
				MIN	TYP	MAX			
f _{max}			C _L = 15 pF	130	80	70		MHz	
			C _L = 50 pF	85	55	50			
t _{PLH}	CLK	Q	C _L = 15 pF	8.3	12.8	1	15	ns	
t _{PHL}				8.3	12.8	1	15		
t _{PLH}	CLK	RCO (count mode)	C _L = 15 pF	8.7	13.6	1	16	ns	
t _{PHL}				8.7	13.6	1	16		
t _{PLH}	CLK	RCO (preset mode)	C _L = 15 pF	11	17.2	1	20	ns	
t _{PHL}				11	17.2	1	20		
t _{PLH}	ENT	RCO	C _L = 15 pF	7.5	12.3	1	14.5	ns	
t _{PHL}				7.5	12.3	1	14.5		
t _{PHL}	$\overline{\text{CLR}}$	Q	C _L = 15 pF	8.9	13.6	1	16	ns	
		RCO		8.4	13.2	1	15.5		
t _{PLH}	CLK	Q	C _L = 50 pF	10.8	16.3	1	18.5	ns	
t _{PHL}				10.8	16.3	1	18.5		
t _{PLH}	CLK	RCO (count mode)	C _L = 50 pF	11.2	17.1	1	19.5	ns	
t _{PHL}				11.2	17.1	1	19.5		
t _{PLH}	CLK	RCO (preset mode)	C _L = 50 pF	13.5	20.7	1	23.5	ns	
t _{PHL}				13.5	20.7	1	23.5		
t _{PLH}	ENT	RCO	C _L = 50 pF	10.5	15.8	1	18	ns	
t _{PHL}				10.5	15.8	1	18		
t _{PHL}	$\overline{\text{CLR}}$	Q	C _L = 50 pF	11.2	17.1	1	19.5	ns	
		RCO		10.9	16.7	1	19		

PRODUCT PREVIEW



SN54AHC161, SN74AHC161

4-BIT SYNCHRONOUS BINARY COUNTERS

SCLS367A – MAY 1997 – REVISED JUNE 1997

switching characteristics over recommended operating free-air temperature range,
 $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$ (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	LOAD CAPACITANCE	SN54AHC161				UNIT
				$T_A = 25^\circ\text{C}$			MIN	MAX
				MIN	TYP	MAX		
f_{max}			$C_L = 15\text{ pF}^*$	185	135		115	MHz
			$C_L = 50\text{ pF}$	125	95		85	
t_{PLH}^*	CLK	Q	$C_L = 15\text{ pF}$	4.9	8.1		1	ns
t_{PHL}^*				4.9	8.1		1	
t_{PLH}^*	CLK	RCO (count mode)	$C_L = 15\text{ pF}$	4.9	8.1		1	ns
t_{PHL}^*				4.9	8.1		1	
t_{PLH}^*	CLK	RCO (preset mode)	$C_L = 15\text{ pF}$	6.2	10.3		1	ns
t_{PHL}^*				6.2	10.3		1	
t_{PLH}^*	ENT	RCO	$C_L = 15\text{ pF}$	4.9	8.1		1	ns
t_{PHL}^*				4.9	8.1		1	
t_{PHL}^*	$\overline{\text{CLR}}$	Q	$C_L = 15\text{ pF}$	5.5	9		1	ns
		RCO		5	8.6		1	
t_{PLH}	CLK	Q	$C_L = 50\text{ pF}$	6.4	10.1		1	ns
t_{PHL}				6.4	10.1		1	
t_{PLH}	CLK	RCO (count mode)	$C_L = 50\text{ pF}$	6.4	10.1		1	ns
t_{PHL}				6.4	10.1		1	
t_{PLH}	CLK	RCO (preset mode)	$C_L = 50\text{ pF}$	7.7	12.3		1	ns
t_{PHL}				7.7	12.3		1	
t_{PLH}	ENT	RCO	$C_L = 50\text{ pF}$	6.4	10.1		1	ns
t_{PHL}				6.4	10.1		1	
t_{PHL}	$\overline{\text{CLR}}$	Q	$C_L = 50\text{ pF}$	7	11		1	ns
		RCO		6.5	10.6		1	

* On products compliant to MIL-PRF-38535, this parameter is ensured but not production tested.

PRODUCT PREVIEW



SN54AHC161, SN74AHC161 4-BIT SYNCHRONOUS BINARY COUNTERS

SCLS367A – MAY 1997 – REVISED JUNE 1997

switching characteristics over recommended operating free-air temperature range,
 $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$ (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	LOAD CAPACITANCE	SN74AHC161					UNIT
				T _A = 25°C			MIN	MAX	
				MIN	TYP	MAX			
f _{max}			C _L = 15 pF	185	135	115		MHz	
			C _L = 50 pF	125	95	85			
t _{PLH}	CLK	Q	C _L = 15 pF	4.9	8.1	1	9.5	ns	
t _{PHL}				4.9	8.1	1	9.5		
t _{PLH}	CLK	RCO (count mode)	C _L = 15 pF	4.9	8.1	1	9.5	ns	
t _{PHL}				4.9	8.1	1	9.5		
t _{PLH}	CLK	RCO (preset mode)	C _L = 15 pF	6.2	10.3	1	12	ns	
t _{PHL}				6.2	10.3	1	12		
t _{PLH}	ENT	RCO	C _L = 15 pF	4.9	8.1	1	9.5	ns	
t _{PHL}				4.9	8.1	1	9.5		
t _{PHL}	$\overline{\text{CLR}}$	Q	C _L = 15 pF	5.5	9	1	10.5	ns	
		RCO		5	8.6	1	10		
t _{PLH}	CLK	Q	C _L = 50 pF	6.4	10.1	1	11.5	ns	
t _{PHL}				6.4	10.1	1	11.5		
t _{PLH}	CLK	RCO (count mode)	C _L = 50 pF	6.4	10.1	1	11.5	ns	
t _{PHL}				6.4	10.1	1	11.5		
t _{PLH}	CLK	RCO (preset mode)	C _L = 50 pF	7.7	12.3	1	14	ns	
t _{PHL}				7.7	12.3	1	14		
t _{PLH}	ENT	RCO	C _L = 50 pF	6.4	10.1	1	11.5	ns	
t _{PHL}				6.4	10.1	1	11.5		
t _{PHL}	$\overline{\text{CLR}}$	Q	C _L = 50 pF	7	11	1	12.5	ns	
		RCO		6.5	10.6	1	12		

noise characteristics, $V_{CC} = 5\text{ V}$, $C_L = 50\text{ pF}$, $T_A = 25^\circ\text{C}$ (see Note 4)

PARAMETER	SN74AHC161			UNIT
	MIN	TYP	MAX	
$V_{OL(P)}$ Quiet output, maximum dynamic V_{OL}		0.4	0.8	V
$V_{OL(V)}$ Quiet output, minimum dynamic V_{OL}		-0.4	-0.8	V
$V_{OH(V)}$ Quiet output, minimum dynamic V_{OH}				V
$V_{IH(D)}$ High-level dynamic input voltage	3.5			V
$V_{IL(D)}$ Low-level dynamic input voltage			1.5	V

NOTE 4: Characteristics are determined during product characterization and ensured by design for surface-mount packages only.

operating characteristics, $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	TYP	UNIT
C_{pd} Power dissipation capacitance	No load, $f = 1\text{ MHz}$	23	pF


PRODUCT PREVIEW



SN54AHC161, SN74AHC161 4-BIT SYNCHRONOUS BINARY COUNTERS

SCLS367A – MAY 1997 – REVISED JUNE 1997

PARAMETER MEASUREMENT INFORMATION

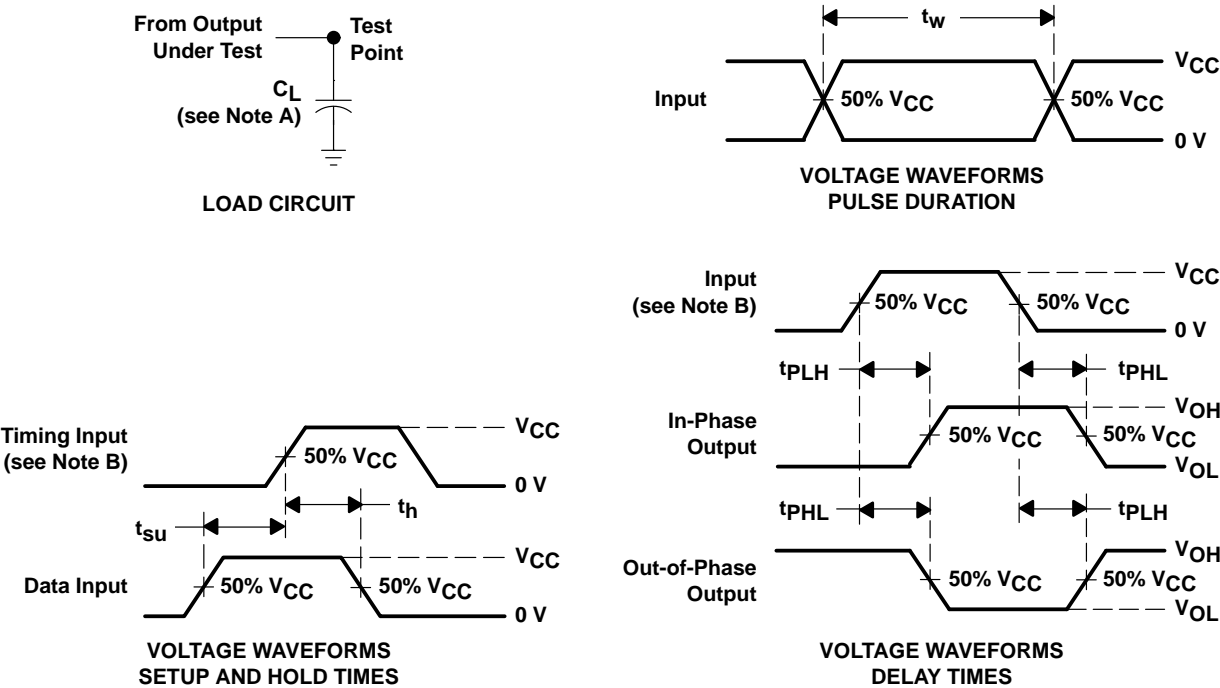

- NOTES: A. C_L includes probe and jig capacitance.
 B. All input pulses are supplied by generators having the following characteristics: $PRR \leq 1 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r = 3 \text{ ns}$, $t_f = 3 \text{ ns}$.
 C. The outputs are measured one at a time with one input transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.