

SN74ALS29861, SN74ALS29862 10-BIT BUS TRANSCEIVERS WITH 3-STATE OUTPUTS

SDAS097B – D2915, JANUARY 1986 – REVISED AUGUST 1988

- Functionally Equivalent to AM29861 and AM29862
- Choice of True or Inverting Logic
- Power-Up High-Impedance State
- Package Options include Plastic Small Outline Packages, Plastic Chip Carriers, and Standard Plastic DIPs

description

These 10-bit bus transceivers are designed for asynchronous two-way communication between data buses. The control function implementation allows for maximum flexibility in timing.

These devices allow data transmission from the A bus to the B bus or from the B bus to the A bus depending upon the logic levels at the enable inputs ($\overline{\text{GBA}}$ and $\overline{\text{GAB}}$).


The enable inputs can be used to disable the device so that the buses are effectively isolated.

The SN74' family is characterized for operation from 0°C to 70°C.


FUNCTION TABLE

INPUTS		OPERATION	
$\overline{\text{GAB}}$	$\overline{\text{GBA}}$	ALS29861	ALS29862
L	H	A to B	$\overline{\text{A}}$ to B
H	L	B to A	$\overline{\text{B}}$ to A
H	H	Isolation	Isolation
L	L	Latch A and B (A = B)	Latch A and B (A = $\overline{\text{B}}$)

DW OR NT PACKAGE
(TOP VIEW)

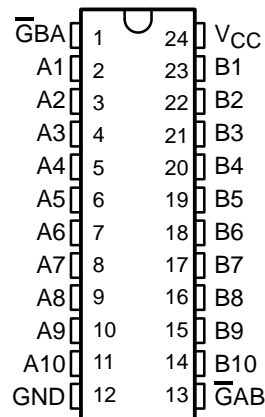

FN PACKAGE
(TOP VIEW)


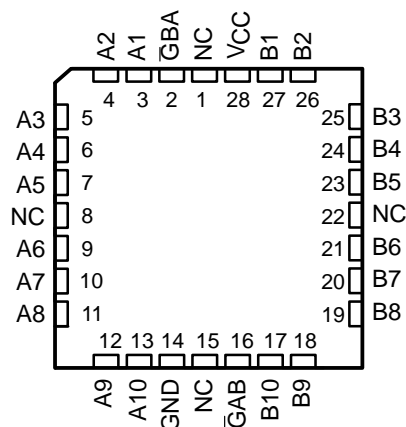


NC – No internal connection

SN74ALS29861, SN74ALS29862 10-BIT BUS TRANSCEIVERS WITH 3-STATE OUTPUTS

SDAS097B – D2915, JANUARY 1986 – REVISED AUGUST 1988

logic symbols†

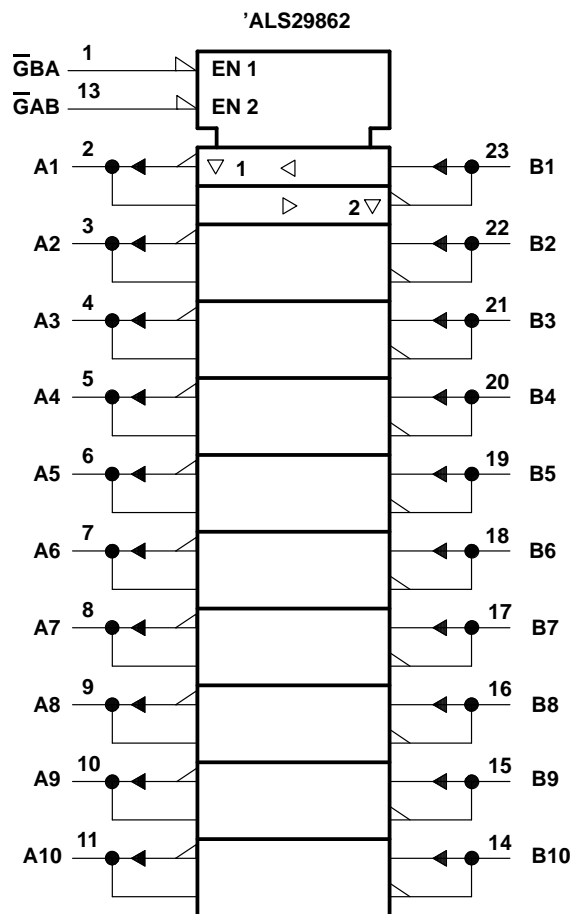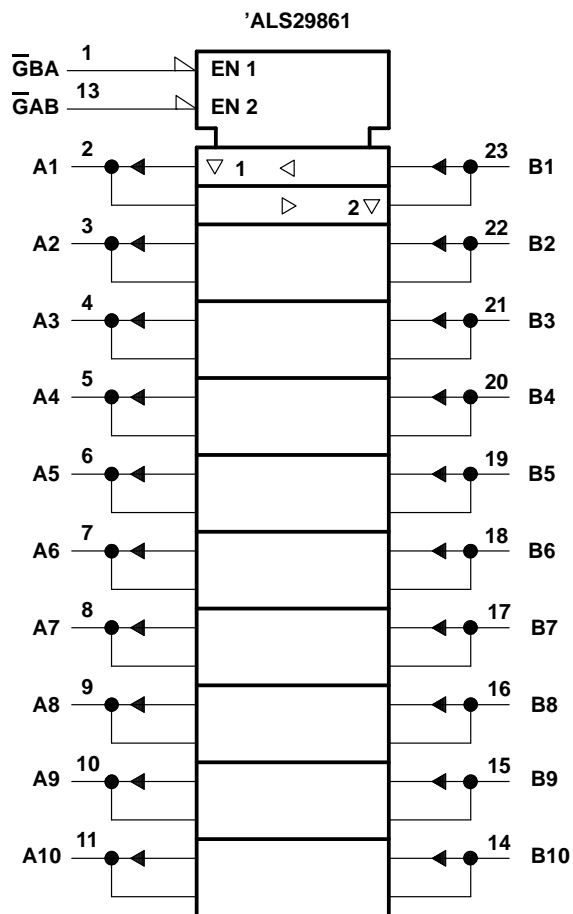



† These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

‡ Pin numbers shown are for DW and NT packages.

SN74ALS29861, SN74ALS29862 10-BIT BUS TRANSCEIVERS WITH 3-STATE OUTPUTS

SDAS097B – D2915, JANUARY 1986 – REVISED AUGUST 1988

logic diagrams

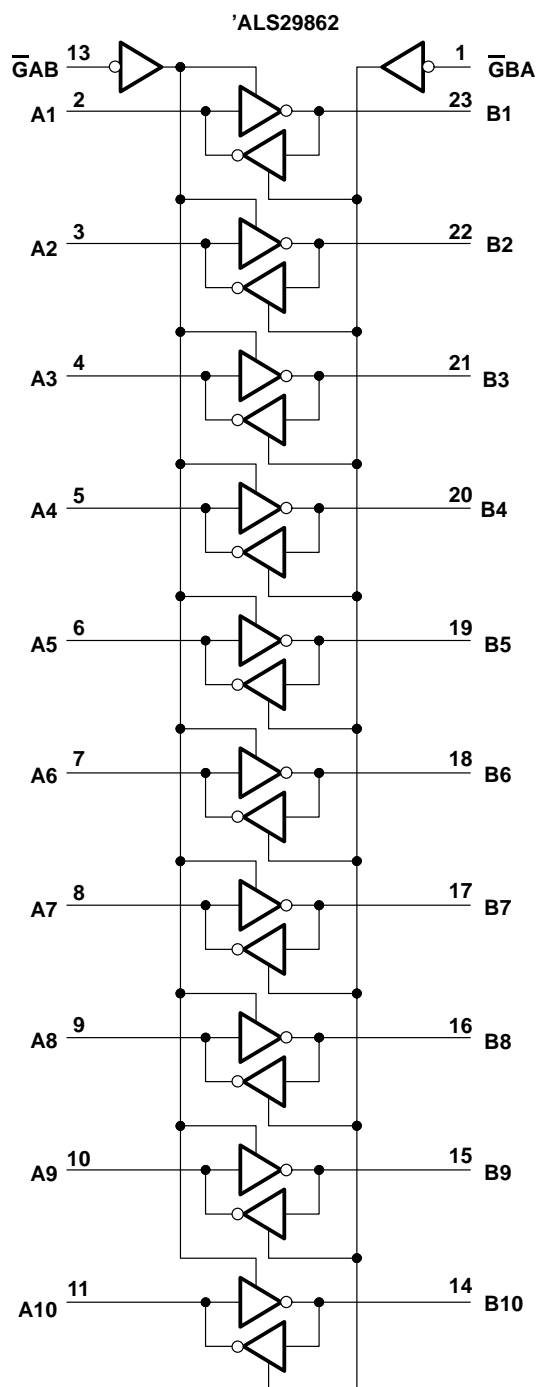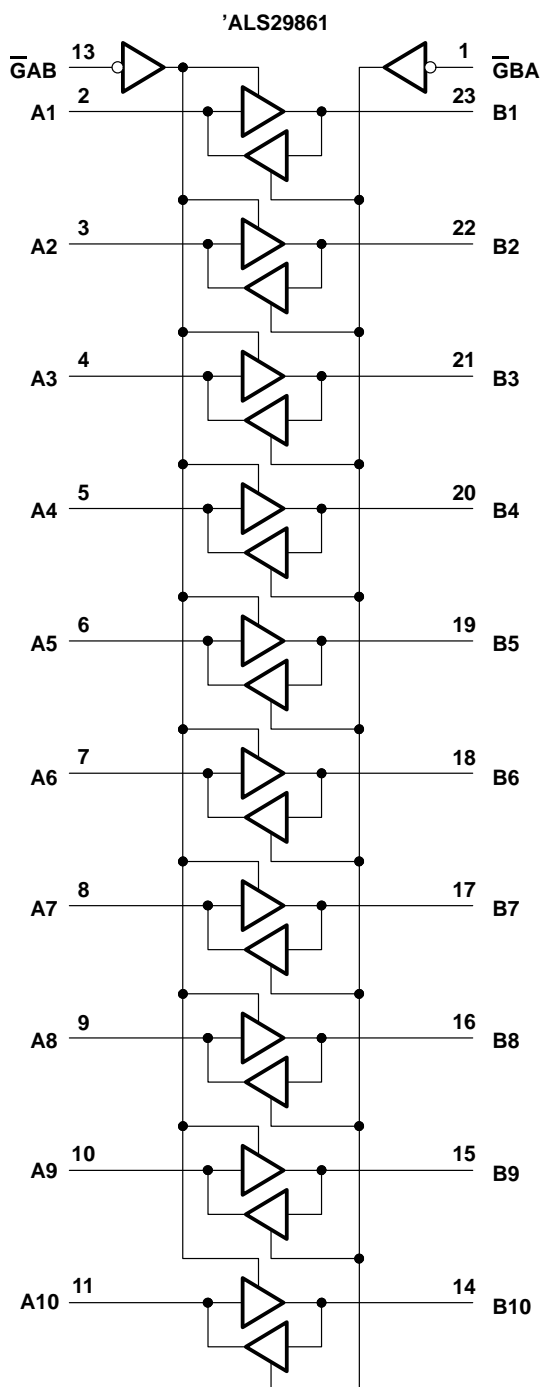

Pin numbers shown are for DW and NT packages.

SN74ALS29861, SN74ALS29862

10-BIT BUS TRANSCEIVERS WITH 3-STATE OUTPUTS

SDAS097B – D2915, JANUARY 1986 – REVISED AUGUST 1988

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage: All inputs and I/O ports	5.5 V
Operating free-air temperature range	0°C to 70°C
Storage temperature range	–65°C to 150°C

recommended operating conditions

	MIN	NOM	MAX	UNIT
V_{CC} Supply voltage	4.75	5	5.25	V
V_{IH} High-level input Voltage	2			V
V_{IL} Low-level input Voltage			0.8	V
I_{OH} High-level output current			–24	mA
I_{OL} Low-level output current			48	mA
T_A Operating free-air temperature	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP †	MAX	UNIT
V _{IK}		V _{CC} = 4.75 V,	I _I = −18 mA			−1.2	V
V _{OH}		V _{CC} = 4.75 V,	I _{OH} = −15 mA	2.4			V
		V _{CC} = 4.75 V,	I _{OH} = −24 mA	2			
V _{OL}		V _{CC} = 4.75 V,	I _{OL} = 48 mA		0.35	0.5	V
I _I		V _{CC} = 5.25 V,	V _I = 5.5 V			0.1	mA
I _{IH}	Control inputs	V _{CC} = 5.25 V,	V _I = 2.7 V			20	μA
	A or B ports‡					20	
I _{IL}	Control inputs	V _{CC} = 5.25 V,	V _I = 0.4 V			−0.1	mA
	A or B ports‡					−0.1	
I _{OS} §		V _{CC} = 5.25 V,	V _O = 0 V	−75		−250	mA
I _{CC}	'ALS29861	V _{CC} = 5.25 V			40	65	mA
	'ALS29862				40	65	

† All typical values are at $V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$

‡ For I/O ports, the parameters I_{IH} and I_{IL} include the off-state output current.

§ Not more than one output should be shorted at a time and duration of the short circuit should not exceed one second.

SN74ALS29861, SN74ALS29862 10-BIT BUS TRANSCEIVERS WITH 3-STATE OUTPUTS

SDAS097B – D2915, JANUARY 1986 – REVISED AUGUST 1988

SN74ALS29861 switching characteristics

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS See Figure 1	V _{CC} = 5 V, T _A = 25°C			V _{CC} = 4.75 V to 5.25 V, T _A = 0°C to 70°C		UNIT
				MIN	TYP	MAX	MIN	MAX	
t _{PLH}	A or B	B or A	C _L = 300 pF	8	11		15		ns
t _{PHL}				11	14		15		
t _{PLH}			C _L = 50 pF	4.8	6		8		
t _{PHL}				5.2	6.2		8		
t _{PZH}	$\overline{\text{GAB}}$ or $\overline{\text{GBA}}$	A or B	C _L = 300 pF	11	17		20		ns
t _{PZL}				17	21		23		
t _{PZH}			C _L = 50 pF	6.5	12		15		
t _{PZL}				9.5	12		15		
t _{PHZ}	$\overline{\text{GAB}}$ or $\overline{\text{GBA}}$	A or B	C _L = 50 pF	11.2	16		17		ns
t _{PLZ}				4.5	9		12		
t _{PHZ}			C _L = 5 pF	3.5	8		9		
t _{PLZ}				3.5	8		9		


SN74ALS29862 switching characteristics

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS See Figure 1	V _{CC} = 5 V, T _A = 25°C			V _{CC} = 4.75 V to 5.25 V, T _A = 0°C to 70°C		UNIT
				MIN	TYP	MAX	MIN	MAX	
t _{PLH}	A or B	B or A	C _L = 300 pF	7.3	10		14		ns
t _{PHL}				10.5	12.9		14		
t _{PLH}			C _L = 50 pF	4	5.2		7		
t _{PHL}				4.9	5.9		7.5		
t _{PZH}	$\overline{\text{GAB}}$ or $\overline{\text{GBA}}$	A or B	C _L = 300 pF	11	17		20		ns
t _{PZL}				17	21		23		
t _{PZH}			C _L = 50 pF	6.5	12		15		
t _{PZL}				9.5	12		15		
t _{PHZ}	$\overline{\text{GAB}}$ or $\overline{\text{GBA}}$	A or B	C _L = 50 pF	11.2	16		17		ns
t _{PLZ}				4.5	9		12		
t _{PHZ}			C _L = 5 pF	3.5	8		9		
t _{PLZ}				3.5	8		9		

SN74ALS29861, SN74ALS29862 10-BIT BUS TRANSCEIVERS WITH 3-STATE OUTPUTS

SDAS097B – D2915, JANUARY 1986 – REVISED AUGUST 1988


PARAMETER MEASUREMENT INFORMATION

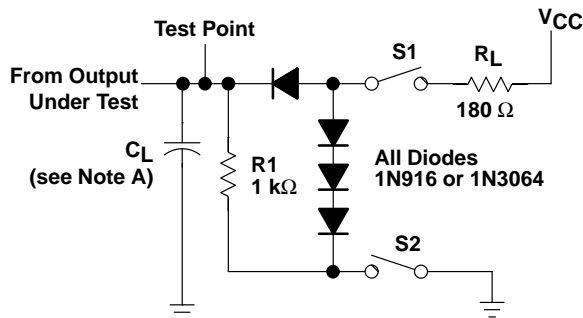


LOAD CIRCUIT

SWITCH POSITION TABLE


TEST	S1	S2
t _{PLH}	Closed	Closed
t _{PHL}	Closed	Closed
t _{PZH}	Open	Closed
t _{PZL}	Closed	Open
t _{PHZ}	Closed	Closed
t _{PLZ}	Closed	Closed

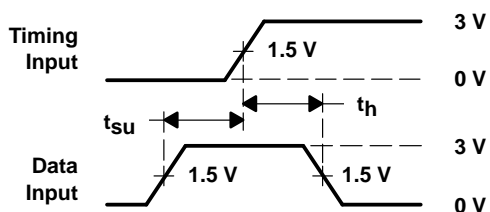


VOLTAGE WAVEFORMS
SETUP AND HOLD TIMES

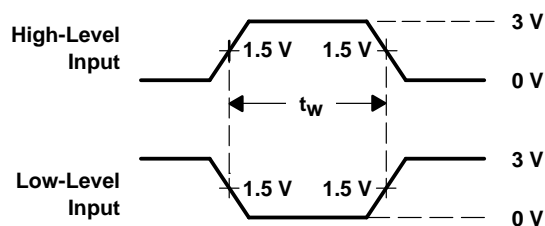

VOLTAGE WAVEFORMS
PULSE DURATIONS

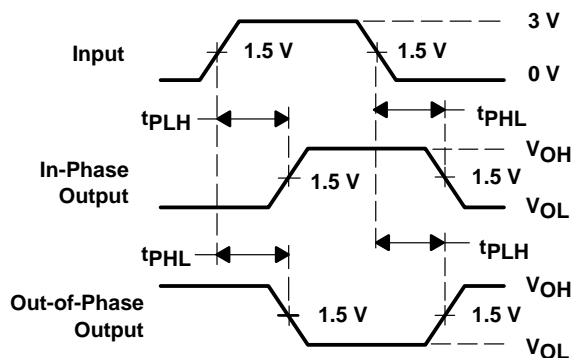

VOLTAGE WAVEFORMS
PROPAGATION DELAY TIMES

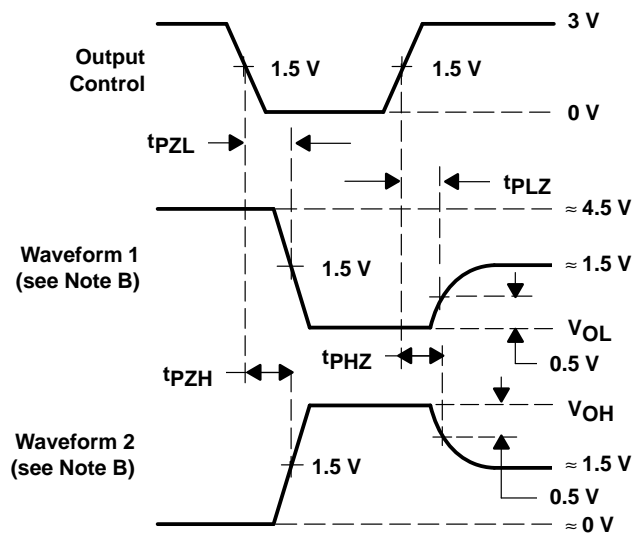

VOLTAGE WAVEFORMS
ENABLE AND DISABLE TIMES, 3-STATE OUTPUTS

NOTES: A. C_L includes probe and jig capacitance.

B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.

C. All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r \leq 2.5 \text{ ns}$, $t_f \leq 2.5 \text{ ns}$.

Figure 1

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.