

2SD892, 2SD892A

Silicon NPN epitaxial planer type darlington


For low-frequency amplification

Features


- Forward current transfer ratio h_{FE} is designed high, which is appropriate to the driver circuit of motors and printer hammer: $h_{FE} = 4000$ to 20000 .
- A shunt resistor is omitted from the driver.

Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Ratings	Unit
Collector to base voltage	2SD892	V_{CBO}	30	V
	2SD892A		60	
Collector to emitter voltage	2SD892	V_{CEO}	25	V
	2SD892A		50	
Emitter to base voltage		V_{EBO}	5	V
Peak collector current		I_{CP}	0.75	A
Collector current		I_C	0.5	A
Collector power dissipation		P_C	400	mW
Junction temperature		T_j	150	°C
Storage temperature		T_{stg}	-55 ~ +150	°C

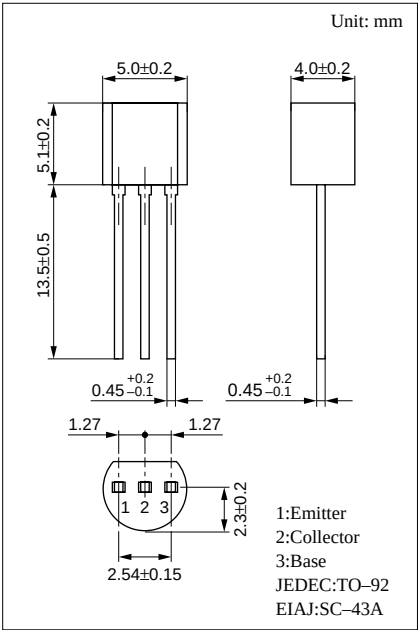

Internal Connection

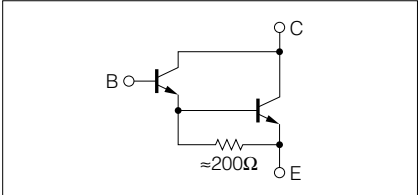

Electrical Characteristics (Ta=25°C)


Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	I_{CBO}	$V_{CB} = 25V, I_E = 0$			100	nA
Emitter cutoff current	I_{EBO}	$V_{EB} = 4V, I_C = 0$			100	nA
Collector to base voltage	2SD892 2SD892A	V_{CBO}	$I_C = 100\mu A, I_E = 0$	30		V
Collector to emitter voltage				60		
Collector to emitter voltage	2SD892 2SD892A	V_{CEO}	$I_C = 1mA, I_B = 0$	25		V
Emitter to base voltage				50		
Emitter to base voltage	V_{EBO}	$I_E = 100\mu A, I_C = 0$	5			V
Forward current transfer ratio	h_{FE}^{*1}	$V_{CE} = 10V, I_C = 500mA^{*2}$	4000		20000	
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = 500mA, I_B = 0.5mA^{*2}$			2.5	V
Base to emitter saturation voltage	$V_{BE(sat)}$	$I_C = 500mA, I_B = 0.5mA^{*2}$			3	V
Transition frequency	f_T	$V_{CB} = 10V, I_E = -50mA, f = 200MHz$		150		MHz

^{*1} h_{FE} Rank classification


Rank	Q	R
h_{FE}	4000 ~ 10000	8000 ~ 20000

^{*2} Pulse measurement


$P_C - T_a$

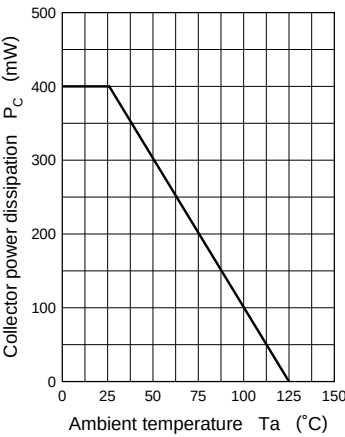


$V_{CE(sat)} - I_C$

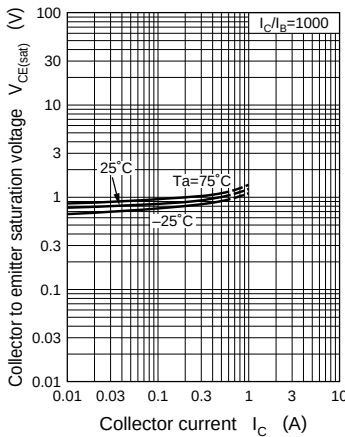

$V_{BE(sat)} - I_C$

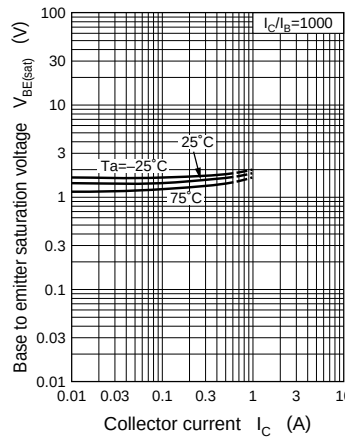

$h_{FE} - I_C$

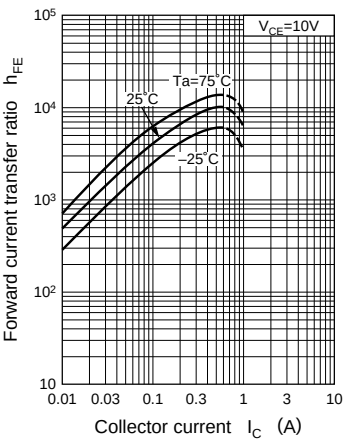

$C_{ob} - V_{CB}$

