

2SK1259

Silicon N-Channel Power F-MOS

■ Features

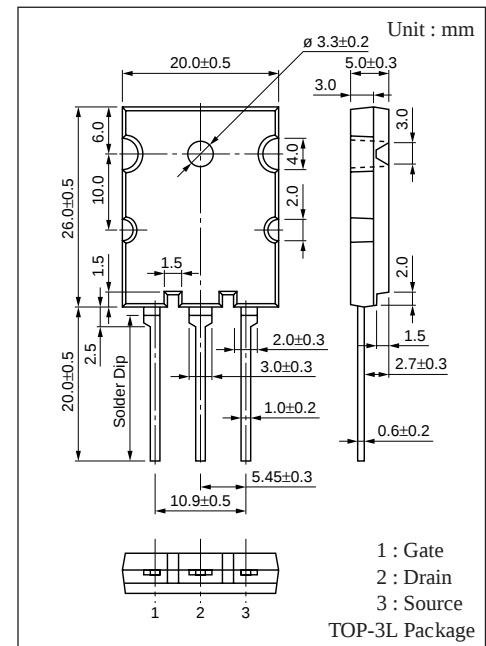
- Low ON-resistance $R_{DS(on)}$: $R_{DS(on)1} = 0.012\Omega(\text{typ})$
- High-speed switching : $t_f = 700\text{ns}(\text{typ})$
- No secondary breakdown
- Low-voltage drive

■ Applications

- DC-DC converter
- Non-contact relay
- Solenoid drive
- Motor drive

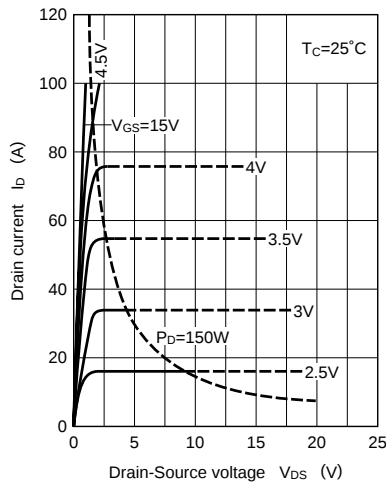
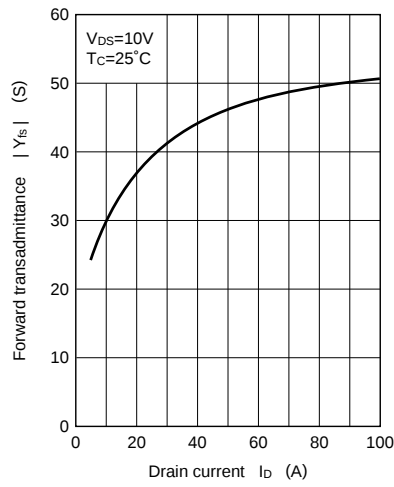
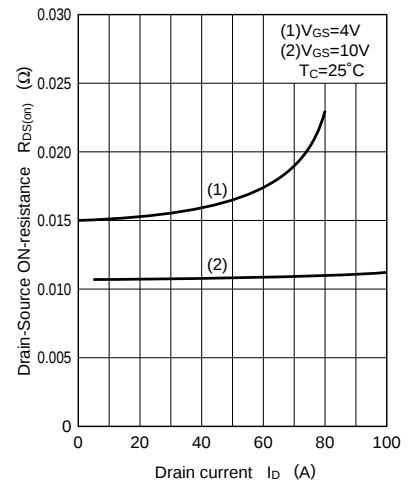
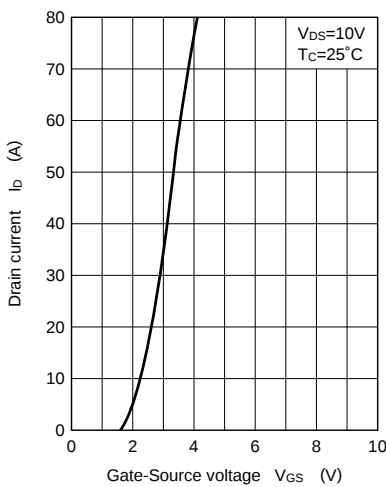
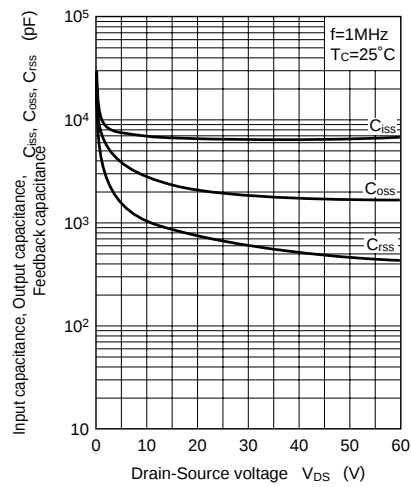
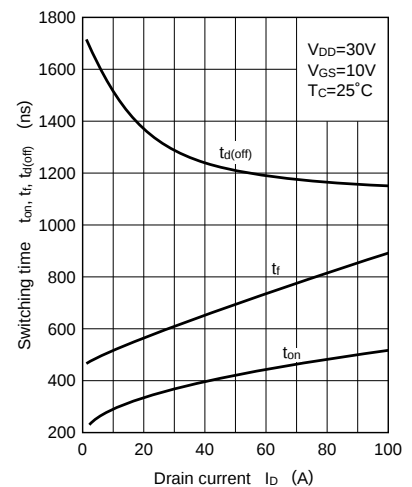
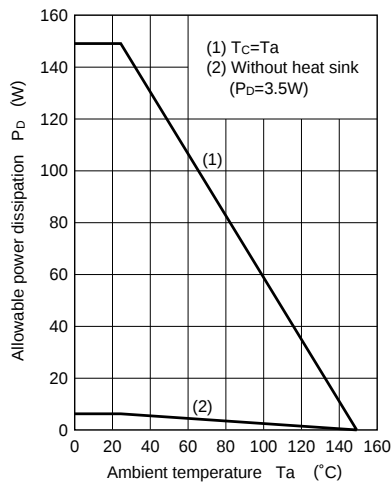
■ Absolute Maximum Ratings ($T_c = 25^\circ\text{C}$)

Parameter	Symbol	Rating	Unit
Drain-Source breakdown voltage	V_{DSS}	60	V
Gate-Source voltage	V_{GSS}	± 20	V
Drain current	at 4V drive	I_D	± 50
	DC	I_D	± 100
	Pulse	I_{DP}	± 200
Allowable power dissipation	$T_C = 25^\circ\text{C}$	P_D	150
	$T_a = 25^\circ\text{C}$	P_D	3.5
Channel temperature	T_{ch}	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

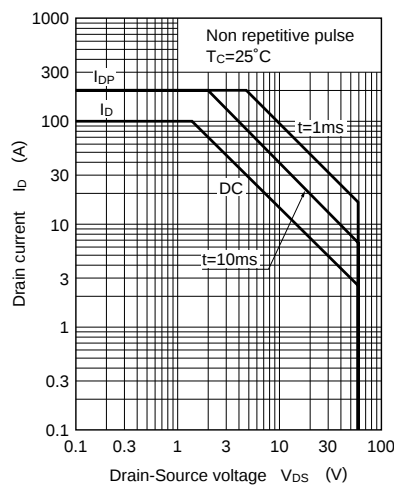


■ Electrical Characteristics ($T_c = 25^\circ\text{C}$)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Drain-Source cut-off current	I_{DSS}	$V_{DS} = 40\text{V}, V_{GS} = 0$			10	μA
Gate-Source leakage current	I_{GSS}	$V_{GS} = \pm 20\text{V}, V_{DS} = 0$			± 1	μA
Drain-Source breakdown voltage	V_{DSS}	$I_D = 1\text{mA}, V_{GS} = 0$	60			V
Gate threshold voltage	V_{th}	$V_{DS} = 10\text{V}, I_D = 1\text{mA}$	1		2.5	V
Drain-Source ON-resistance	$R_{DS(on)1}$	$V_{GS} = 10\text{V}, I_D = 50\text{A}$		0.012	0.016	Ω
	$R_{DS(on)2}$	$V_{GS} = 4\text{V}, I_D = 25\text{A}$		0.015	0.023	Ω
Forward transadmittance	$ Y_{fs} $	$V_{DS} = 10\text{V}, I_D = 50\text{A}$	30	45		S
Input capacitance	C_{iss}	$V_{DS} = 10\text{V}, V_{GS} = 0, f = 1\text{MHz}$		7000		pF
Output capacitance	C_{oss}			2900		pF
Feedback capacitance	C_{rss}			1000		pF
Turn-on time	t_{on}	$V_{GS} = 10\text{V}, I_D = 50\text{A}$ $V_{DD} \approx 30\text{V}, R_L = 0.6\Omega$		420		ns
Fall time	t_f			700		ns
Turn-off time (delay time)	$t_{d(off)}$			1200		ns

$I_D - V_{DS}$  $|Y_{fs}| - I_D$  $R_{DS(on)} - I_D$  $I_D - V_{GS}$  $C_{iss}, C_{oss}, C_{rss} - V_{DS}$  $t_{on}, t_f, t_d(off) - I_D$  $P_D - T_a$ 

Area of safe operation (ASO)

 $R_{DS(on)} - I_D$ 