

International IR Rectifier

80CPTN015

SCHOTTKY RECTIFIER

80 Amp

Major Ratings and Characteristics

Characteristics	80CPTN015	Units
$I_{F(AV)}$ Rectangular waveform	80	A
V_{RRM}	15	V
I_{FSM} @ $t_p = 5 \mu s$ sine	2200	A
V_F @ $40 A_{pk}, T_J = 125^\circ C$ (typical) (per leg)	0.30	V
T_J range	-55 to 150	°C

Description/ Features

This center tap Schottky rectifier series has been optimized for ultra low forward voltage drop specifically for 1.5V output power supplies. The proprietary sub-micron technology allows for low power loss in forward and reverse conduction.


- $150^\circ C T_J$ operation
- Center tap configuration
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Ultra low forward voltage drop
- High frequency operation

Case Styles

80CPTN015



TO-247AC

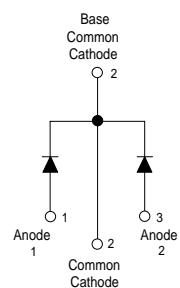

80CPTN015

Bulletin PD-20413 rev. B 09/02

International
 Rectifier

Voltage Ratings

Part number		80CPTN015	
V_R	Max. DC Reverse Voltage (V)	15	
V_{RWM}	Max. Working Peak Reverse Voltage (V)		

Absolute Maximum Ratings

Parameters	Value	Units	Conditions		
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 5	80	A	50% duty cycle @ $T_C = 137^\circ\text{C}$, rectangular wave form		
Per Device Per Leg	40				
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	2200	A	5μs Sine or 3μs Rect. pulse	Following any rated load condition and with rated V_{RRM} applied	
	500		10ms Sine or 6ms Rect. pulse		
E_{AS} Non-Repetitive Avalanche Energy (Per Leg)	9	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 2$ Amps, $L = 4.5$ mH		
I_{AR} Repetitive Avalanche Current (Per Leg)	2	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical		

Electrical Specifications

Parameters	Typ.	Max.	Units	Conditions		
V_{FM} Max. Forward Voltage Drop (Per Leg) * See Fig. 1	0.39	0.42	V	@ 40A	$T_J = 25^\circ\text{C}$	
	0.46	0.51	V	@ 80A		
	0.30	0.34	V	@ 40A		
	0.40	0.45	V	@ 80A	$T_J = 125^\circ\text{C}$	
	0.27	0.30	V	@ 40A		
	0.38	0.41	V	@ 80A		
I_{RM} Max. Reverse Leakage Current (Per Leg) * See Fig. 2	0.6	3.0	mA	$T_J = 25^\circ\text{C}$	$V_R = \text{rated } V_R$	
	200	350	mA	$T_J = 125^\circ\text{C}$		
	650	850	mA	$T_J = 150^\circ\text{C}$		
C_T Max. Junction Capacitance (Per Leg)	-	2600	pF	$V_R = 10V_{DC}$ (test signal range 100Khz to 1Mhz) 25°C		
L_S Typical Series Inductance (Per Leg)	-	7.5	nH	Measured lead to lead 5mm from package body		
dv/dt Max. Voltage Rate of Change	-	10000	V/μs	(Rated V_R)		

(1) Pulse Width < 300μs, Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters	Value	Units	Conditions	
T_J Max. Junction Temperature Range	-55 to 150	°C		
T_{stg} Max. Storage Temperature Range	-55 to 150	°C		
R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	0.6	°C/W	DC operation	* See Fig. 4
R_{thJC} Max. Thermal Resistance Junction to Case (Per Package)	0.3	°C/W	DC operation	
R_{thCS} Typical Thermal Resistance, Case to Heatsink	0.25	°C/W	Mounting surface, smooth and greased	
wt Approximate Weight	6 (0.21)	g(oz.)		
T Mounting Torque	Min.	6 (5)	Kg-cm	
	Max.	12 (10)	(lbf-in)	
Case Style	TO-247AC (TO-3P)		JEDEC	

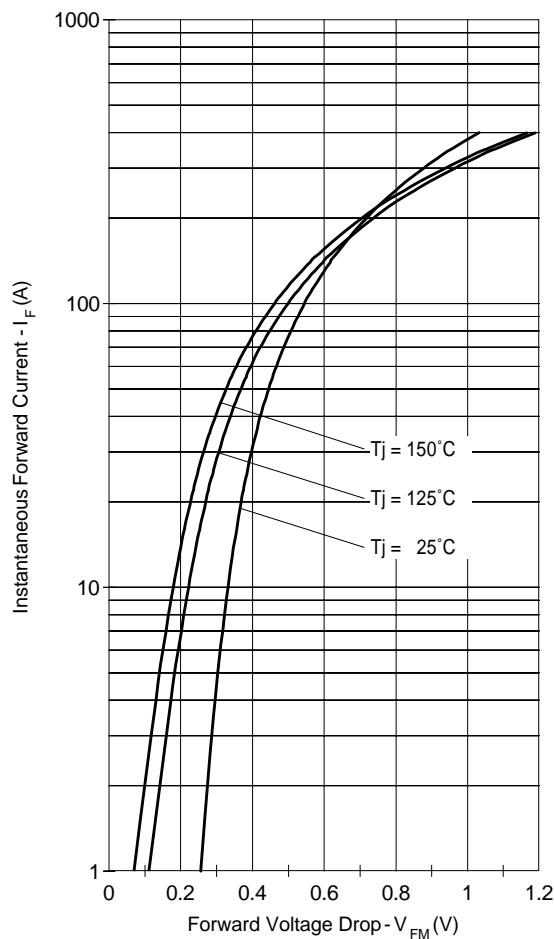


Fig. 1 - Max. Forward Voltage Drop Characteristics
 (Per Leg)

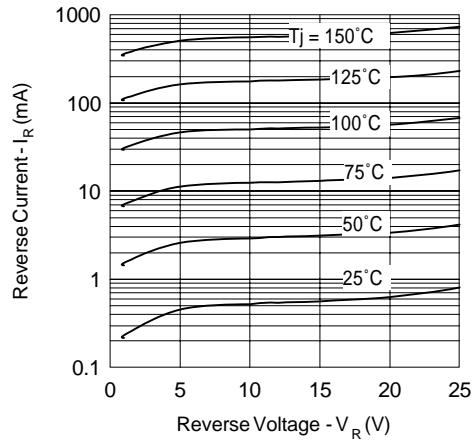


Fig. 2 - Typical Values Of Reverse Current
 Vs. Reverse Voltage (Per Leg)

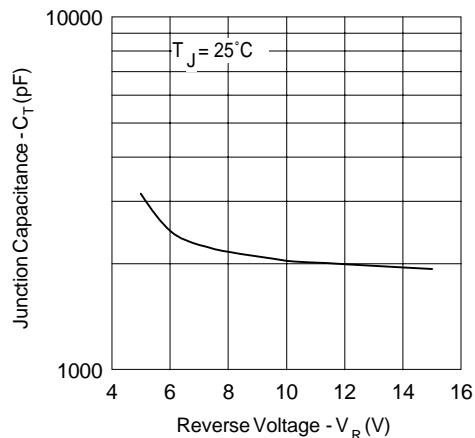


Fig. 3 - Typical Junction Capacitance
 Vs. Reverse Voltage (Per Leg)

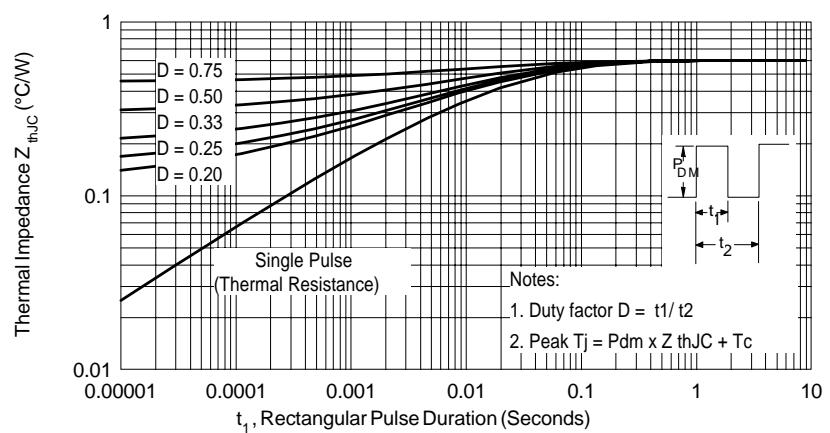


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

80CPTN015

Bulletin PD-20413 rev. B 09/02

International
IR Rectifier

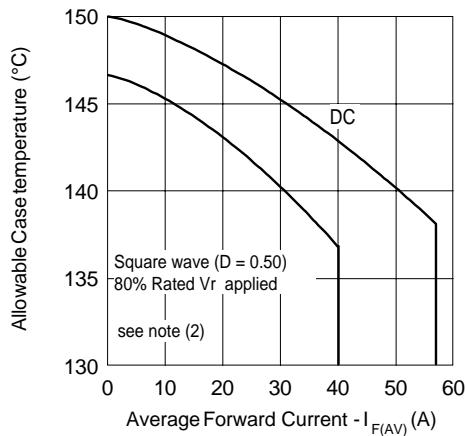


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

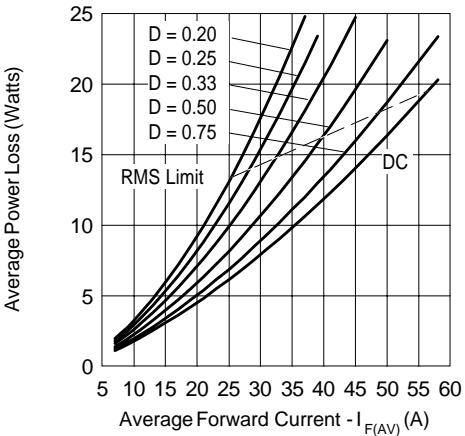


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

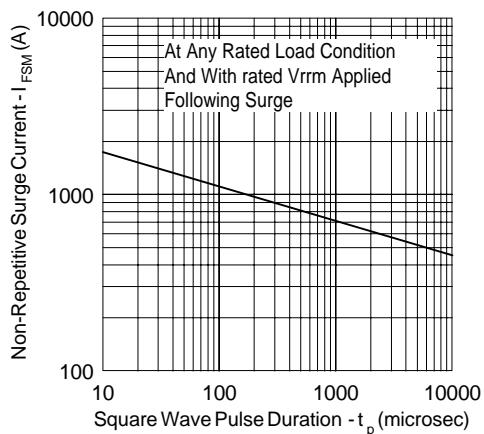


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)


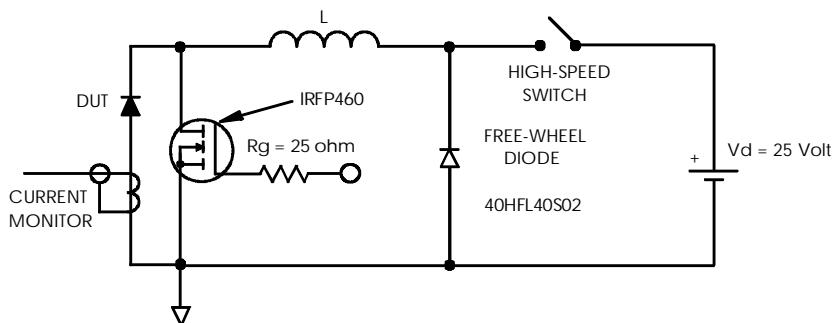


Fig. 8 - Unclamped Inductive Test Circuit

- (2) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;
 $P_d = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
 $P_{d_{REV}} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D); I_R @ V_{R1} = 80\% \text{ rated } V_R$

Outline Table

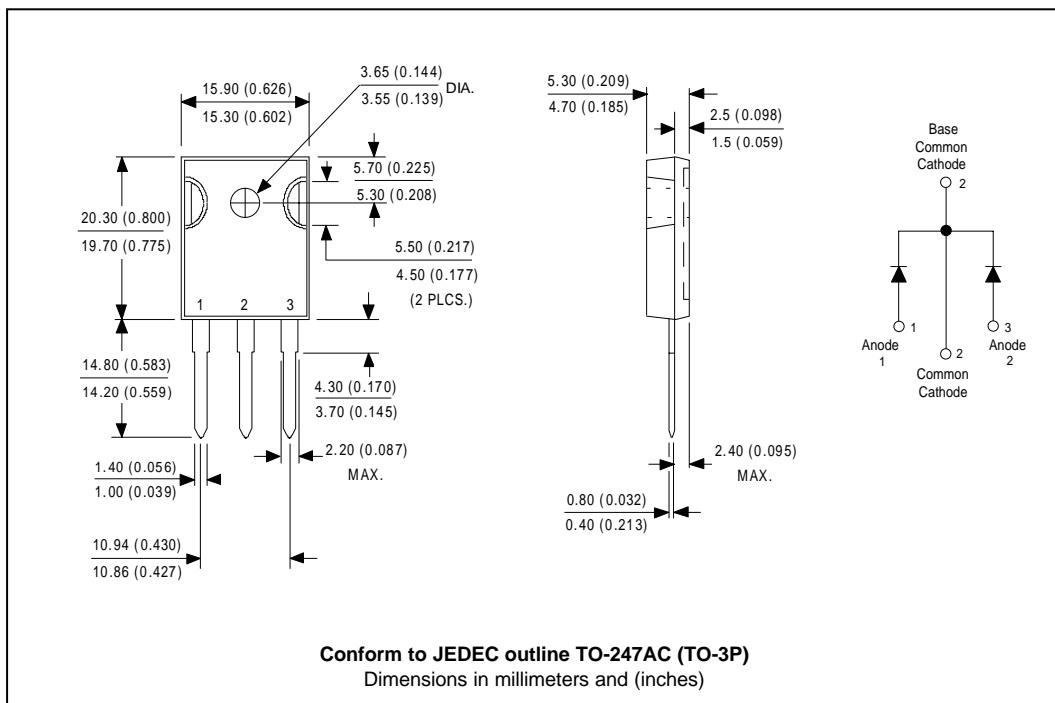

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 09/02