

1.3GHz Prescaler

The MC12076 is a divide by 256 prescaler. Typical frequency synthesis applications include electronically tuned TV/CATV and communication systems as well as instrumentation.

An internal preamplifier is included which isolates the differential inputs and provides gain for the input signal. Differential PECL outputs are provided.

- 1.3GHz Toggle Frequency
- Operating Supply Voltage of 4.5 to 5.5V
- Low-Power 36mA Typical at $V_{CC} = 5.0V$
- Operating Temperature Range of 0°C to +85°C
- High Input Sensitivity
- 800mV Minimum Peak-to-Peak Output Swing
- Differential PECL Outputs

DESIGN GUIDE

Criteria	Value	Unit
Internal Gate Count*	62	ea
Internal Gate Propagation Delay	250	ps
Internal Gate Power Dissipation	10	mW
Speed Power Product	2.5	pJ

* Equivalent to a two-input NAND gate

MAXIMUM RATINGS

Symbol	Characteristic	Range	Unit
V_{CC}	Power Supply Voltage	7.0	Vdc
T_A	Operating Temperature Range	0 to +85	°C
T_{stg}	Storage Temperature Range	-65 to +175	°C

ELECTRICAL CHARACTERISTICS ($V_{CC} = 4.5$ to 5.5V; $T_A = 0$ to +85°C)

Symbol	Characteristic	Min	Typ*	Max	Unit
f_{max}^1 f_{min}	Toggle Frequency (Sine Wave Input)	1.3	1.6	70	GHz MHz
I_{CC}	Supply Current at 5.5V		36	50	mA
V_{out}	Output Voltage (Load = 10pF)	0.8	1.2		V_{PP}
$V_{in min}$	Input Voltage 70MHz Sensitivity 150-1100MHz 1.2GHz 1.3GHz		10 1.0 1.5 3.0	20 4.0 15 20	mV _{rms}
$V_{in max}$	Input Overload 70-1300MHz	400			mV _{rms}


* Typical measured at +25°C, 5.0V

1. See Figure 1

MC12076

MECL PLL COMPONENTS

÷256
PRESCALER




P SUFFIX
PLASTIC PACKAGE
CASE 626-05

D SUFFIX
PLASTIC SOIC PACKAGE
CASE 751-04



Pinout: 8-Lead Plastic (Top View)

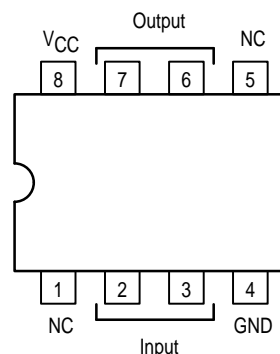

PRESALER BLOCK DIAGRAM



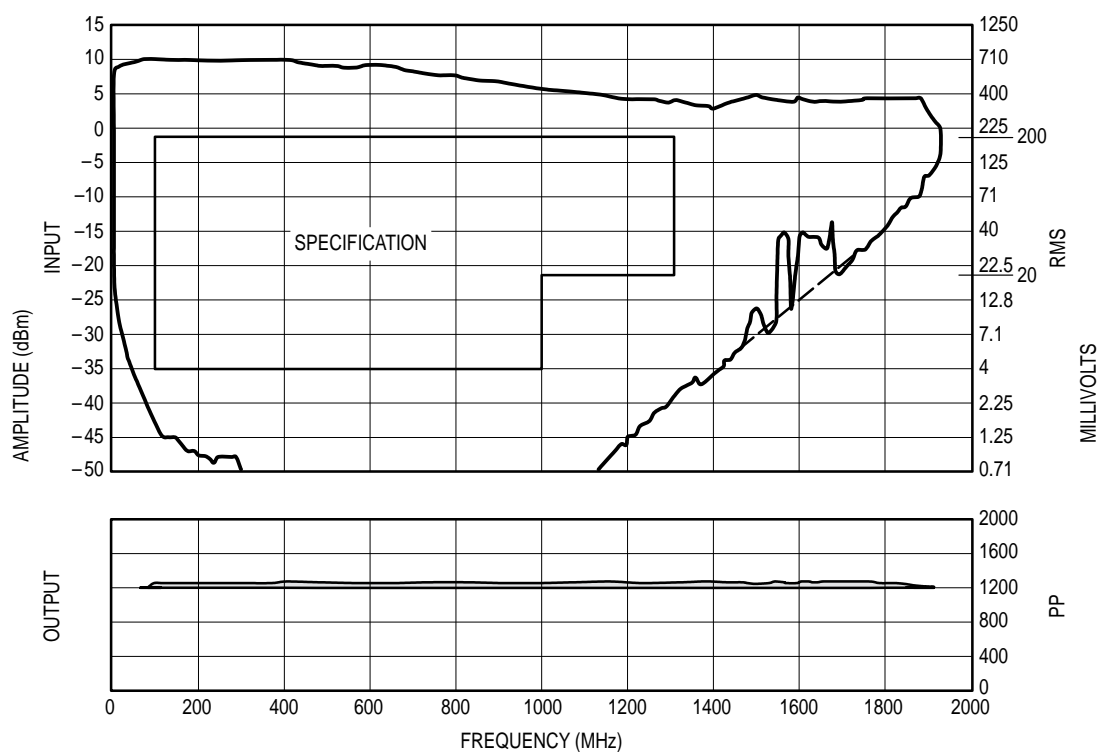


Figure 1. MC12076 Input Signal Amplitude versus Input Frequency

OUTLINE DIMENSIONS


P SUFFIX
PLASTIC PACKAGE
CASE 626-05

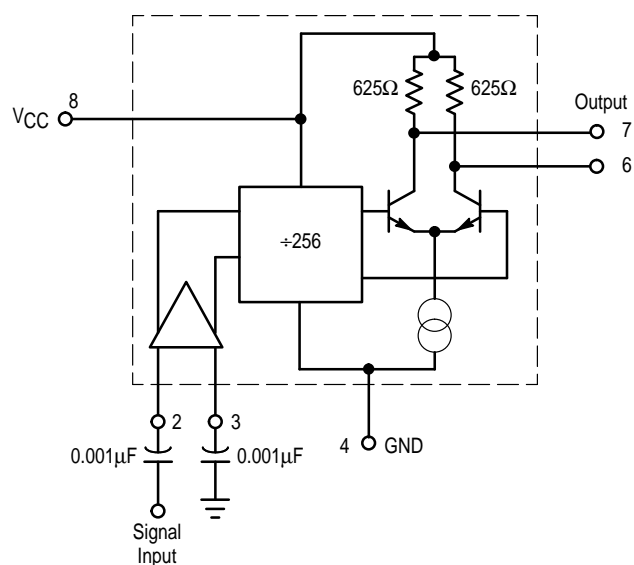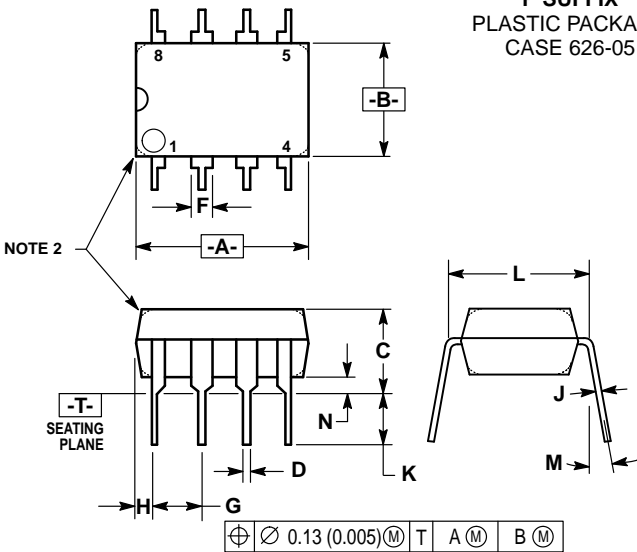

- NOTES:
1. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
 2. PACKAGE CONTOUR OPTIONAL (ROUND OR SQUARE CORNERS).
 3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.40	10.16	0.370	0.400
B	6.10	6.60	0.240	0.260
C	3.94	4.45	0.155	0.175
D	0.38	0.51	0.015	0.020
F	1.02	1.78	0.040	0.070
G	2.54 BSC		0.100 BSC	
H	0.76	1.27	0.030	0.050
J	0.20	0.30	0.008	0.012
K	2.92	3.43	0.115	0.135
L	7.62 BSC		0.300 BSC	
M	10°		10°	
N	0.76	1.01	0.030	0.040

D SUFFIX
PLASTIC SOIC PACKAGE
CASE 751-04

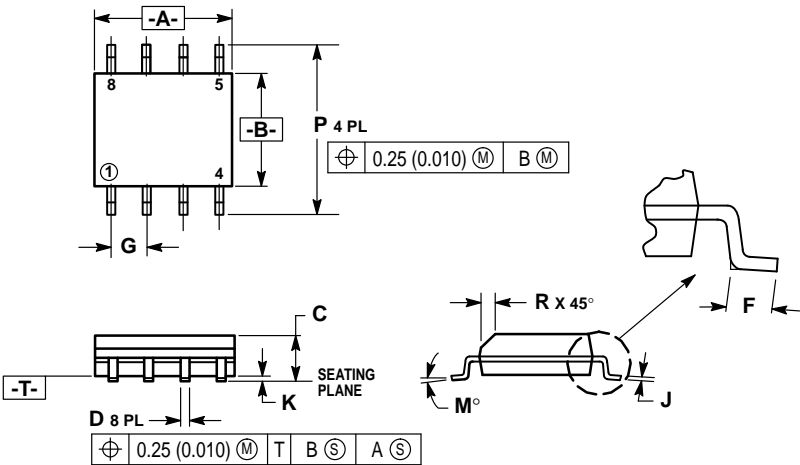

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIM: MILLIMETER.
 3. DIMENSIONS A AND B ARE DATUMS AND T IS A DATUM SURFACE.
 4. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
 5. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
 6. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.80	5.00	0.189	0.196
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27 BSC		0.050 BSC	
J	0.18	0.25	0.007	0.009
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Literature Distribution Centers:

USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.
EUROPE: Motorola Ltd.; European Literature Centre; 88 Tanners Drive, Blakelands, Milton Keynes, MK14 5BP, England.
JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141 Japan.
ASIA-PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.



MOTOROLA

CODELINE TO BE PLACED HERE

MC12076/D

