

SN54LS373, SN54LS374, SN54S373, SN54S374, SN74LS373, SN74LS374, SN74S373, SN74S374

OCTOBER 1975—REVISED MARCH 1988

- Choice of 8 Latches or 8 D-Type Flip-Flops In a Single Package
- 3-State Bus-Driving Outputs
- Full Parallel-Access for Loading
- Buffered Control Inputs
- Clock/Enable Input Has Hysteresis to Improve Noise Rejection ('S373 and 'S374)
- P-N-P Inputs Reduce D-C Loading on Data Lines ('S373 and 'S374)

'LS373, 'S373
FUNCTION TABLE

OUTPUT ENABLE	ENABLE LATCH	D	OUTPUT
L	H	H	H
L	H	L	L
L	L	X	Q ₀
H	X	X	Z

'LS374, 'S374
FUNCTION TABLE


OUTPUT ENABLE	CLOCK	D	OUTPUT
L	↑	H	H
L	↑	L	L
L	L	X	Q ₀
H	X	X	Z

description


These 8-bit registers feature three-state outputs designed specifically for driving highly-capacitive or relatively low-impedance loads. The high-impedance third state and increased high-logic-level drive provide these registers with the capability of being connected directly to and driving the bus lines in a bus-organized system without need for interface or pull-up components. They are particularly attractive for implementing buffer registers, I/O ports, bidirectional bus drivers, and working registers.

The eight latches of the 'LS373 and 'S373 are transparent D-type latches meaning that while the enable (C) is high the Q outputs will follow the data (D) inputs. When the enable is taken low the output will be latched at the level of the data that was set up.

SN54LS373, SN54LS374, SN54S373,
SN54S374 . . . J OR W PACKAGE
SN74LS373, SN74LS374, SN74S373,
SN74S374 . . . DW OR N PACKAGE
(TOP VIEW)



SN54LS373, SN54LS374, SN54S373,
SN54S374 . . . FK PACKAGE
(TOP VIEW)



†C for 'LS373 and 'S373; CLK for 'LS374 and 'S374.

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.


TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265


SN54LS373, SN54LS374, SN74LS373, SN74LS374
OCTAL D-TYPE TRANSPARENT LATCHES AND
EDGE-TRIGGERED FLIP-FLOPS

schematic of inputs and outputs

*LS373

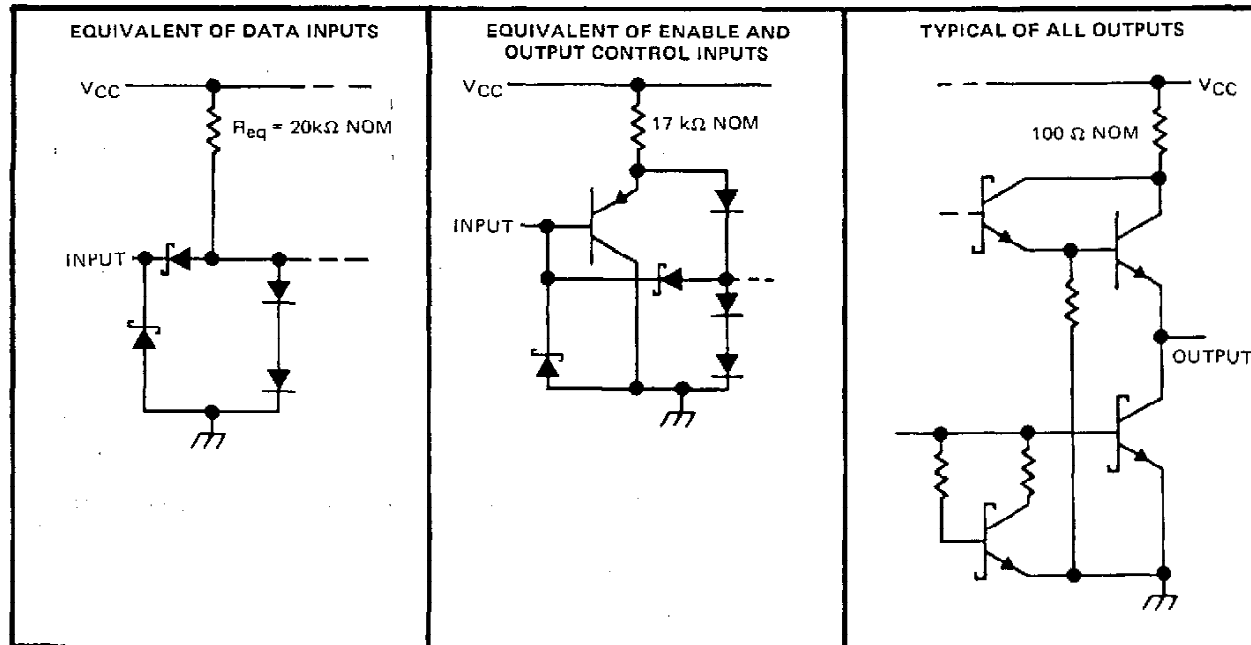

*LS374

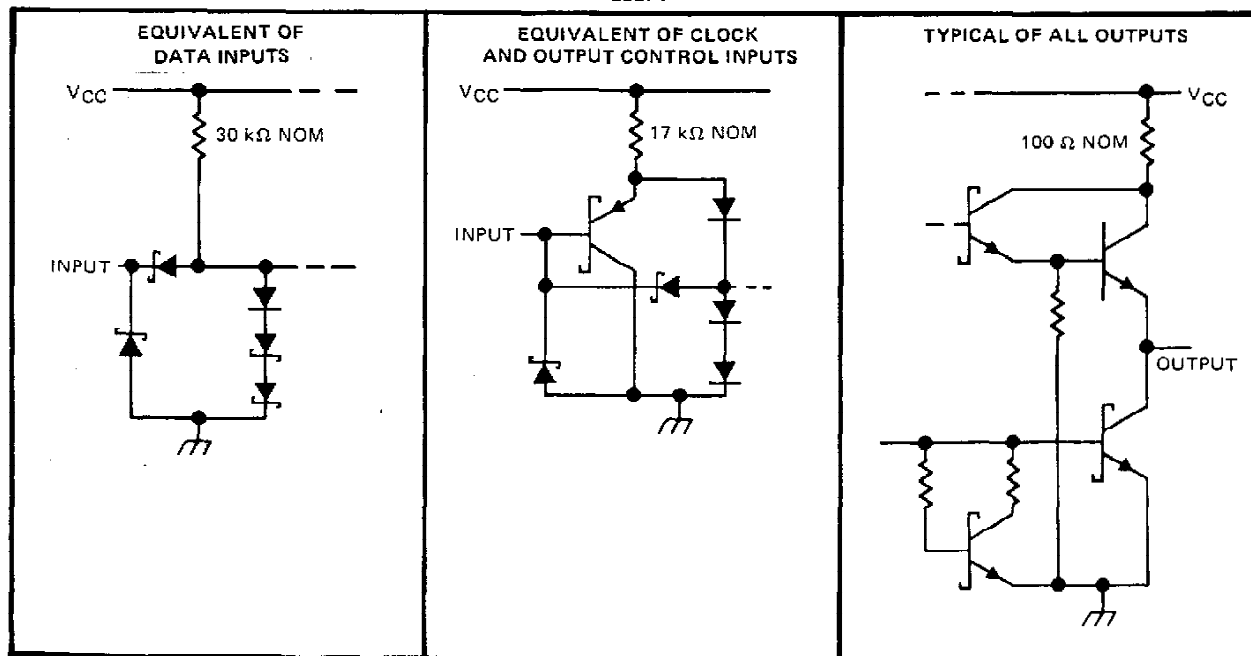

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

SN54LS373, SN54LS374, SN74LS373, SN74LS374

OCTAL D-TYPE TRANSPARENT LATCHES AND

EDGE-TRIGGERED FLIP-FLOPS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC} (see Note 1)	7 V
Input voltage	7 V
Off-state output voltage	5.5 V
Operating free-air temperature range: SN54LS'	-55°C to 125°C
SN74LS'	0°C to 70°C
Storage temperature range	-65°C to 150°C

NOTE 1: Voltage values are with respect to network ground terminal.

recommended operating conditions

			SN54LS'			SN74LS'			UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage		4.5	5	5.5	4.75	5	5.25	V
V _{OH}	High-level output voltage				5.5			5.5	V
I _{OH}	High-level output current				− 1			− 2.6	mA
I _{OL}	Low-level output current				12			24	mA
t _w	Pulse duration	CLK high	15			15			ns
		CLK low	15			15			
t _{su}	Data setup time	'LS373	5 ↓			5 ↓			ns
		'LS374	20 ↑			20 ↑			
t _h	Data hold time	'LS373	20 ↓			20 ↓			ns
		'LS374 †	5 ↑			0 ↑			
T _A	Operating free-air temperature		− 55			125			°C

†The t_h specification applies only for data frequency below 10 MHz. Designs above 10 MHz should use a minimum of 5 ns. (Commercial only)

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS†	SN54LS'			SN74LS'			UNIT
			MIN	TYP‡	MAX	MIN	TYP‡	MAX	
V _{IH}	High-level input voltage		2			2			V
V _{IL}	Low-level input voltage		0.7			0.8			V
V _{IK}	Input clamp voltage	V _{CC} = MIN, I _I = -18 mA	-1.5			-1.5			V
V _{OH}	High-level output voltage	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = V _{ILmax} , I _{OH} = MAX	2.4	3.4		2.4	3.1		V
V _{OL}	Low-level output voltage	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = V _{ILmax}	I _{OL} = 12 mA		0.25	0.4	0.25 0.4		V
		I _{OL} = 24 mA				0.35 0.5			
I _{OZH}	Off-state output current, high-level voltage applied	V _{CC} = MAX, V _{IH} = 2 V, V _O = 2.7 V	20			20			μA
I _{OZL}	Off-state output current, low-level voltage applied	V _{CC} = MAX, V _{IH} = 2 V, V _O = 0.4 V	-20			-20			μA
I _I	Input current at maximum input voltage	V _{CC} = MAX, V _I = 7 V	0.1			0.1			mA
I _{IH}	High-level input current	V _{CC} = MAX, V _I = 2.7 V	20			20			μA
I _{IL}	Low-level input current	V _{CC} = MAX, V _I = 0.4 V	-0.4			-0.4			mA
I _{OS}	Short-circuit output current§	V _{CC} = MAX	-30	-130		-30	-130		mA
I _{CC}	Supply current	V _{CC} = MAX,	'LS373		24	40	24 40		mA
		Output control at 4.5 V	'LS374		27	40	27 40		

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at $V_{CC} = 5 \text{ V}, T_A = 25^\circ \text{C}$.

§ Not more than one output should be shorted at a time and duration of the short circuit should not exceed one second.



POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

SN54LS373, SN54LS374, SN74LS373, SN74LS374
OCTAL D-TYPE TRANSPARENT LATCHES AND
EDGE-TRIGGERED FLIP-FLOPS

switching characteristics, $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	'LS373			'LS374			UNIT
				MIN	TYP	MAX	MIN	TYP	MAX	
f_{\max}			$C_L = 45\text{ pF}$, $R_L = 667\ \Omega$ See Notes 2 and 3				35	50		MHz
t_{PLH}	Data	Any Q			12	18				ns
t_{PHL}					12	18				
t_{PLH}	Clock or enable	Any Q			20	30		15	28	ns
t_{PHL}					18	30		19	28	
t_{PZH}	Output Control	Any Q			15	28		20	26	ns
t_{PZL}					25	36		21	28	
t_{PHZ}	Output Control	Any Q	$C_L = 5\text{ pF}$, $R_L = 667\ \Omega$ See Note 3		15	25		15	28	ns
t_{PLZ}	Output Control	Any Q			12	20		12	20	ns

NOTES: 2. Maximum clock frequency is tested with all outputs loaded.
3. Load circuits and voltage waveforms are shown in Section 1.



f_{\max} = maximum clock frequency
 t_{PLH} = propagation delay time, low-to-high-level output
 t_{PHL} = propagation delay time, high-to-low-level output
 t_{PZH} = output enable time to high level
 t_{PZL} = output enable time to low level
 t_{PHZ} = output disable time from high level
 t_{PLZ} = output disable time from low level

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

SN54S373, SN54S374, SN74S373, SN74S374 **OCTAL D-TYPE TRANSPARENT LATCHES AND** **EDGE-TRIGGERED FLIP-FLOPS**

schematic of inputs and outputs

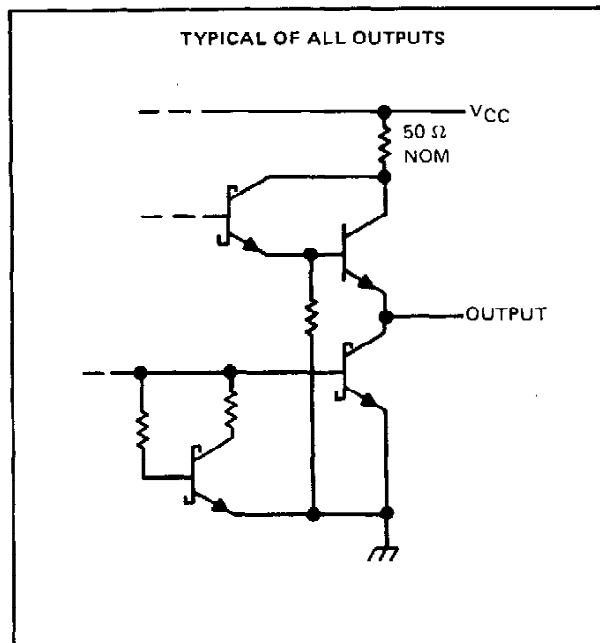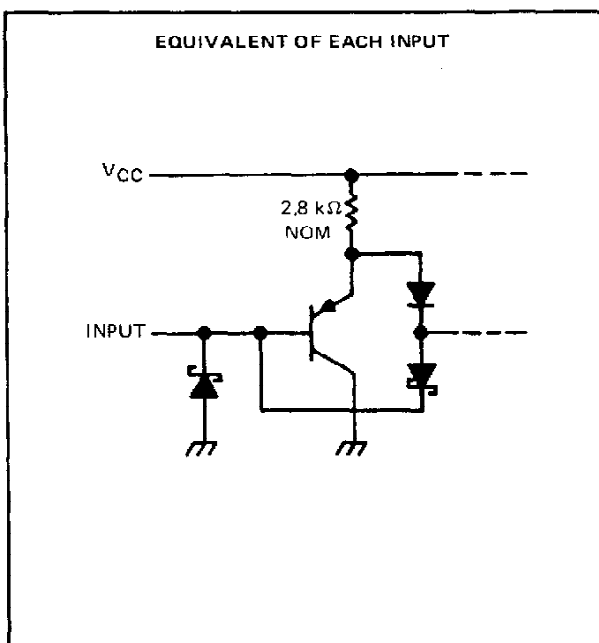

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC} (see Note 1)	7 V
Input voltage	5.5 V
Off-state output voltage	5.5 V
Operating free-air temperature range: SN54S'	-55°C to 125°C
SN74S'	0°C to 70°C
Storage temperature range	-65°C to 150°C

NOTE 1: Voltage values are with respect to network ground terminal.

recommended operating conditions

		SN54S'			SN74S'			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
Supply voltage, V_{CC}		4.5	5	5.5	4.75	5	5.25	V
High-level output voltage, V_{OH}				5.5			5.5	V
High-level output current, I_{OH}				-2			-6.5	mA
Width of clock/enable pulse, t_W	High	6			6			ns
	Low	7.3			7.3			
Data setup time, t_{SU}	'S373	0↓			0↓			ns
	'S374	5↑			5↑			
Data hold time, t_H	'S373	10↓			10↓			ns
	'S374	2↑			2↑			
Operating free-air temperature, T_A		-55		125	0		70	°C

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

SN54S373, SN54S374, SN74S373, SN74S374

OCTAL D-TYPE TRANSPARENT LATCHES AND EDGE-TRIGGERED FLIP-FLOPS

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS†		MIN	TYP‡	MAX	UNIT
V_{IH}				2			V
V_{IL}						0.8	V
V_{IK}		$V_{CC} = \text{MIN.}$, $I_I = -18 \text{ mA}$				-1.2	V
V_{OH}	SN54S'	$V_{CC} = \text{MIN.}$, $V_{IH} = 2 \text{ V}$, $V_{IL} = 0.8 \text{ V}$, $I_{OH} = \text{MAX}$		2.4	3.4		V
	SN74S'			2.4	3.1		
V_{OL}		$V_{CC} = \text{MIN.}$, $V_{IH} = 2 \text{ V}$, $V_{IL} = 0.8 \text{ V}$, $I_{OL} = 20 \text{ mA}$				0.5	V
I_{OZH}		$V_{CC} = \text{MAX.}$, $V_{IH} = 2 \text{ V}$, $V_O = 2.4 \text{ V}$				50	μA
I_{OZL}		$V_{CC} = \text{MAX.}$, $V_{IH} = 2 \text{ V}$, $V_O = 0.5 \text{ V}$				-50	μA
I_I		$V_{CC} = \text{MAX.}$, $V_I = 5.5 \text{ V}$				1	mA
I_{IH}		$V_{CC} = \text{MAX.}$, $V_I = 2.7 \text{ V}$				50	μA
I_{IL}		$V_{CC} = \text{MAX.}$, $V_I = 0.5 \text{ V}$				-250	μA
I_{OS}^{\S}		$V_{CC} = \text{MAX}$		-40		-100	mA
I_{CC}	$V_{CC} = \text{MAX}$	'S373	outputs high			160	mA
			outputs low			160	
			outputs disabled			190	
		'S374	outputs high			110	
			outputs low			140	
			outputs disabled			160	
		CLK and OC at 4 V, D inputs at 0 V				180	

†For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$.

§Not more than one output should be shorted at a time and duration of the short-circuit should not exceed one second.

switching characteristics, $V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	'S373		'S374		UNIT	
				MIN	TYP	MAX	MIN		TYP
f _{max}			C _L = 15 pF, R _L = 280 Ω, See Notes 2 and 4				75	100	MHz
t _{PLH}	Data	Any Q		7	12				ns
t _{PHL}				7	12				
t _{PLH}	Clock or enable	Any Q		7	14		8	15	ns
t _{PHL}				12	18		11	17	
t _{PZH}	Output Control	Any Q		8	15		8	15	ns
t _{PZL}				11	18		11	18	
t _{PHZ}	Output Control	Any Q	C _L = 5 pF, R _L = 280 Ω, See Note 3	6	9		5	9	ns
t _{PLZ}				8	12		7	12	

NOTES: 2. Maximum clock frequency is tested with all outputs loaded.

4. Load circuits and voltage waveforms are shown in Section 1.

f_{max} = maximum clock frequency

t_{PLH} = propagation delay time, low-to-high-level output

t_{PHL} = propagation delay time, high-to-low-level output

t_{PZH} = output enable time to high level

t_{PZL} = output enable time to low level

t_{PHZ} = output disable time from high level



t_{PLZ} = output disable time from low level

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

**SN54LS373, SN54LS374, SN54S373, SN54S374,
SN74LS373, SN74LS374, SN74S373, SN74S374
OCTAL D-TYPE TRANSPARENT LATCHES AND EDGE-TRIGGERED FLIP-FLOPS**


TYPICAL APPLICATION DATA

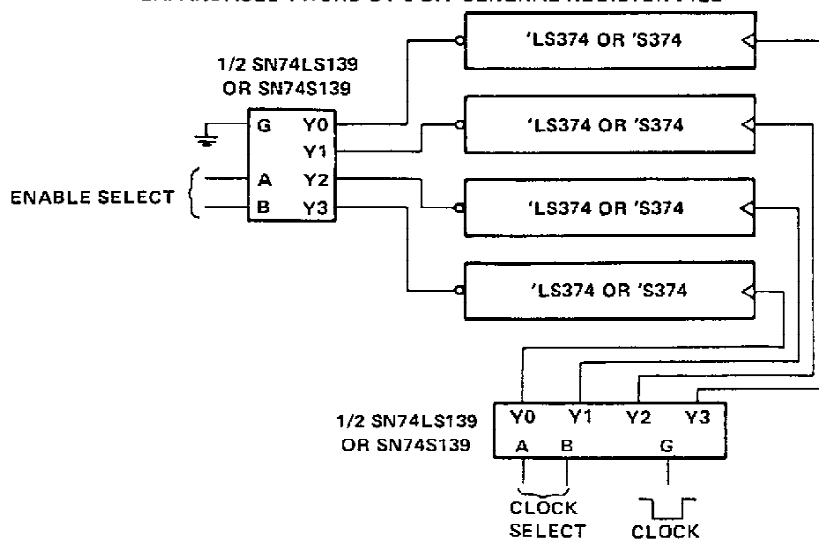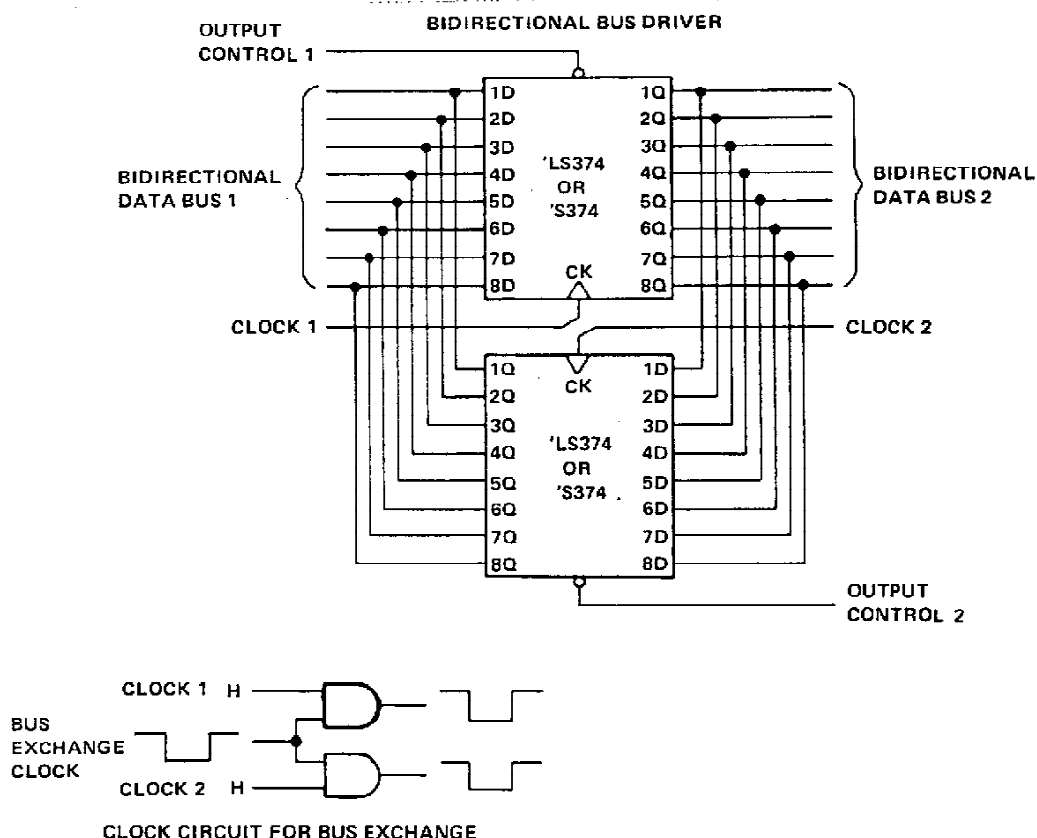

description (continued)

Schmitt-trigger buffered inputs at the enable/clock lines of the 'S373 and 'S374 devices, simplify system design as ac and dc noise rejection is improved by typically 400 mV due to the input hysteresis. A buffered output control input can be used to place the eight outputs in either a normal logic state (high or low logic levels) or a high-impedance state. In the high-impedance state the outputs neither load nor drive the bus lines significantly.

logic diagrams (positive logic)

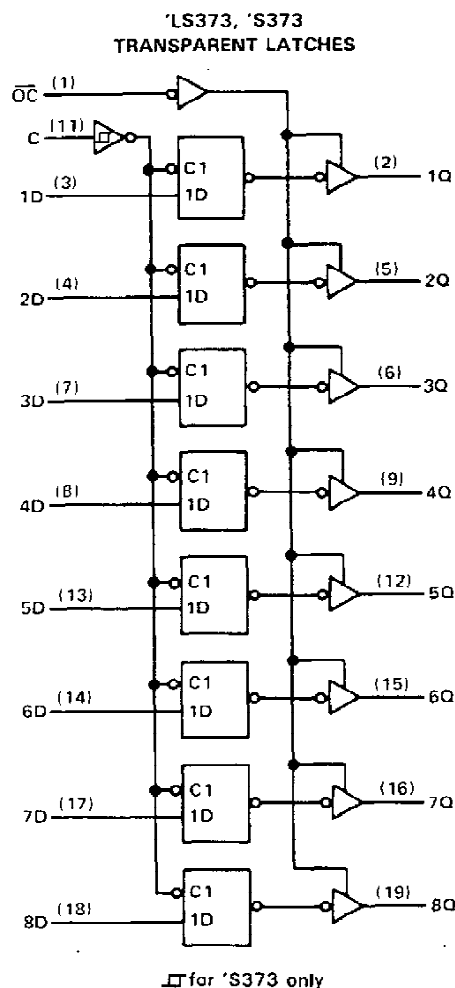

'LS374, 'S374
POSITIVE-EDGE-TRIGGERED FLIP-FLOPS

OC (1)

CLK (11)

1D (3)

2D (4)

3D (7)

4D (8)

5D (13)

6D (14)

7D (17)

8D (18)

1Q (2)

2Q (5)

3Q (6)

4Q (9)

5Q (12)

6Q (15)

7Q (16)

8Q (19)

C1

1D

□ for 'S374 only

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.