

Silicon Controlled Rectifiers


Reverse Blocking Thyristors

**MCR25
SERIES***
*Motorola preferred devices

SCRs
25 AMPERES RMS
400 thru 800
VOLTS

Designed primarily for half-wave ac control applications, such as motor controls, heating controls, and power supplies; or wherever half-wave, silicon gate-controlled devices are needed.

- Blocking Voltage to 800 Volts
- On-State Current Rating of 25 Amperes RMS
- High Surge Current Capability — 300 Amperes
- Industry Standard TO-220AB Package for Ease of Design
- Glass Passivated Junctions for Reliability and Uniformity

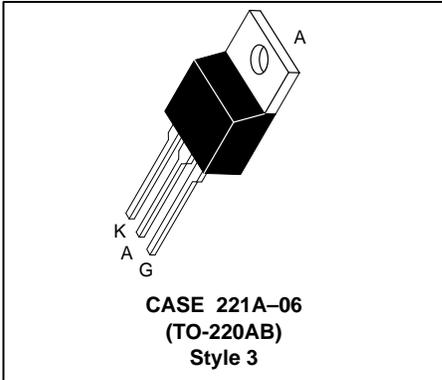

MAXIMUM RATINGS (T_J = 25°C unless otherwise noted)

| Parameter | Symbol | Value | Unit |
|---|--------------------------------------|-------------------|--------------------|
| Peak Repetitive Off-State Voltage (1) Peak Repetitive Reverse Voltage (T _J = -40 to 125°C) | V _{DRM} V _{RRM} | 400 600 800 | Volts |
| On-State RMS Current (All Conduction Angles) | I _{T(RMS)} | 25 | A |
| Peak Non-repetitive Surge Current (One Half Cycle, 60 Hz, T _J = 125°C) | I _{TSM} | 300 | A |
| Circuit Fusing Consideration (t = 8.3 ms) | i ² t | 373 | A ² sec |
| Peak Gate Power (Pulse Width ≤ 1.0 μs, T _C = 80°C) | P _{GM} | 20.0 | Watts |
| Average Gate Power (t = 8.3 ms, T _C = 80°C) | P _{G(AV)} | 0.5 | Watts |
| Peak Gate Current (Pulse Width ≤ 1.0 μs, T _C = 80°C) | I _{GM} | 2.0 | A |
| Operating Junction Temperature Range | T _J | -40 to +125 | °C |
| Storage Temperature Range | T _{stg} | -40 to +150 | °C |

THERMAL CHARACTERISTICS

| | | | |
|--|--------------------------------------|-------------|------|
| Thermal Resistance — Junction to Case — Junction to Ambient | R _{θJC} R _{θJA} | 1.5 62.5 | °C/W |
| Maximum Lead Temperature for Soldering Purposes 1/8" from Case for 5 Seconds | T _L | 260 | °C |

(1) V_{DRM} and V_{RRM} for all types can be applied on a continuous basis. Ratings apply for zero or negative gate voltage; positive gate voltage shall not be applied concurrent with negative potential on the anode. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.

Preferred devices are Motorola recommended choices for future use and best overall value.

REV 2

MCR25 SERIES

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|---|------------------|------------------------|------|-------------|-------|
| OFF CHARACTERISTICS | | | | | |
| Peak Forward Blocking Current | I _{DRM} | — | — | — | mA |
| Peak Reverse Blocking Current (V _{AK} = Rated V _{DRM} or V _{RRM} , Gate Open) | I _{RRM} | — | — | 0.01 2.0 | |
| | | T _J = 25°C | | | |
| | | T _J = 125°C | | | |
| ON CHARACTERISTICS | | | | | |
| Peak On-State Voltage* (I _{TM} = 50 A) | V _{TM} | — | — | 1.8 | Volts |
| Gate Trigger Current (Continuous dc) (V _D = 12 V, R _L = 100 Ω) | I _{GT} | 4.0 | 10 | 30 | mA |
| Gate Trigger Voltage (Continuous dc) (V _D = 12 V, R _L = 100 Ω) | V _{GT} | 0.5 | 0.65 | 1.0 | Volts |
| Hold Current (Anode Voltage = 12 V) | I _H | 5.0 | 25 | 40 | mA |
| DYNAMIC CHARACTERISTICS | | | | | |
| Critical Rate of Rise of Off-State Voltage (V _D = Rated V _{DRM} , Exponential Waveform, Gate Open, T _J = 125°C) | dv/dt | 50 | 200 | — | V/μs |

*Indicates Pulse Test: Pulse Width ≤ 2.0 ms, Duty Cycle ≤ 2%.

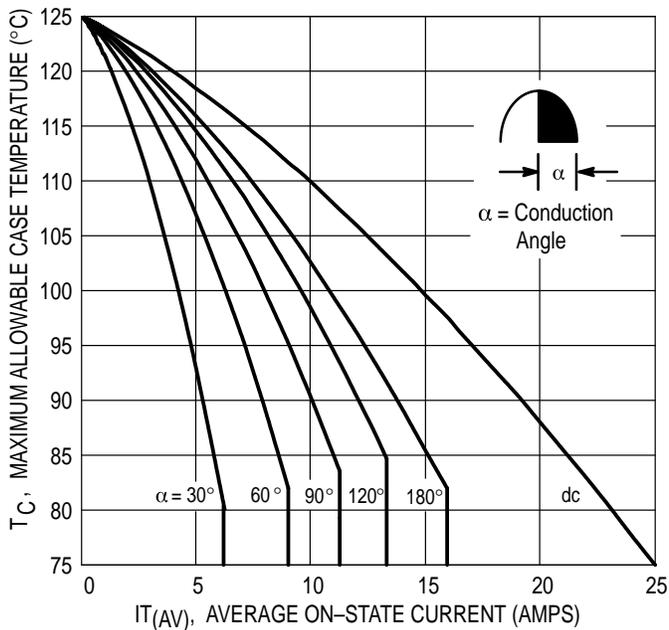


Figure 1. Average Current Derating

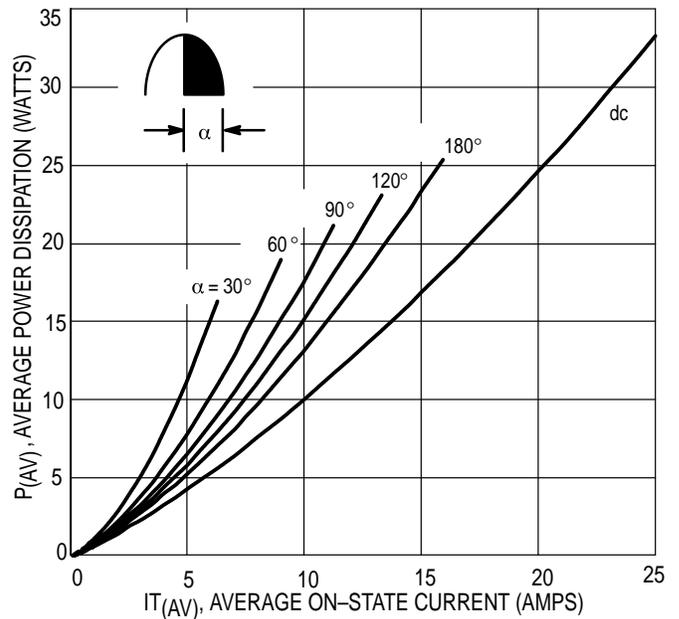


Figure 2. Maximum On-State Power Dissipation

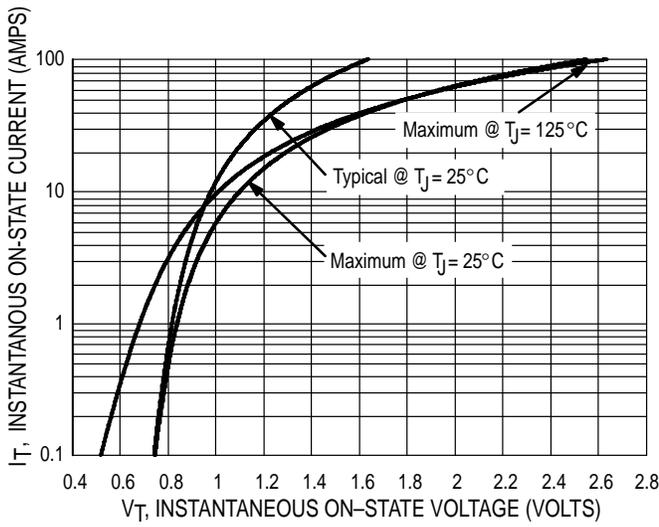


Figure 3. On-State Characteristics

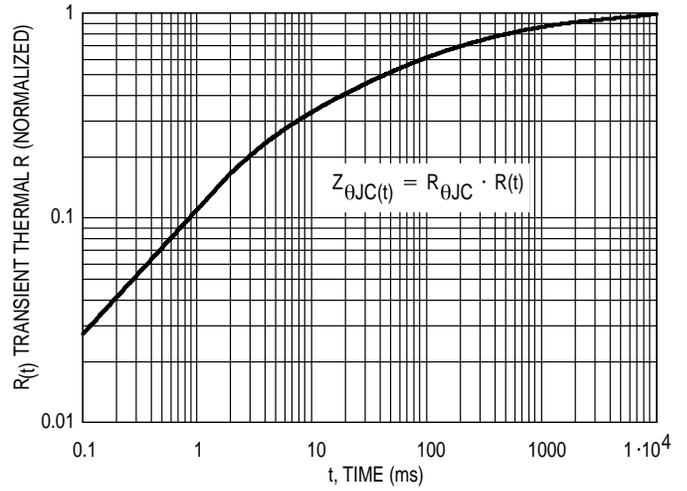


Figure 4. Transient Thermal Response

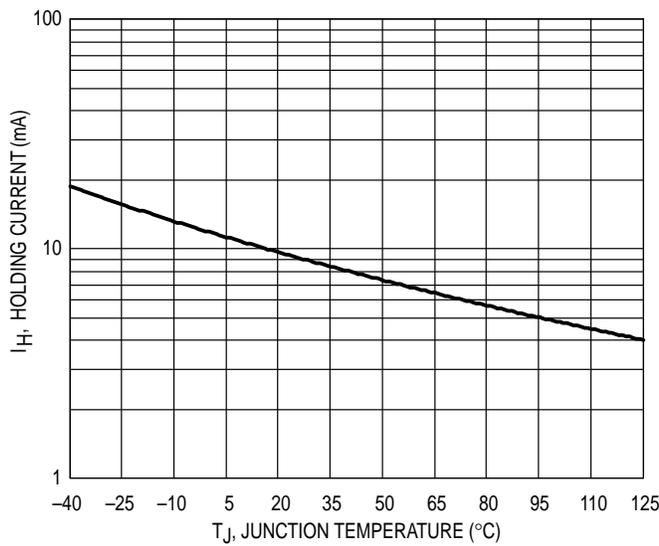


Figure 5. Typical Holding Current Versus Junction Temperature

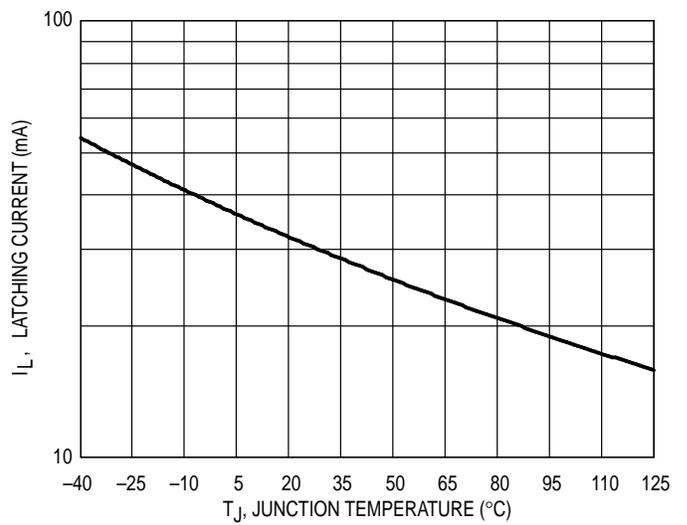


Figure 6. Typical Latching Current Versus Junction Temperature

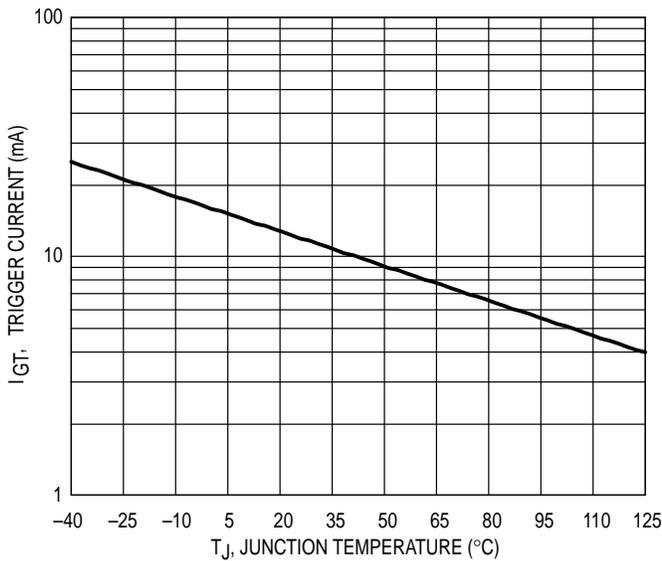


Figure 7. Typical Gate Trigger Current Versus Junction Temperature

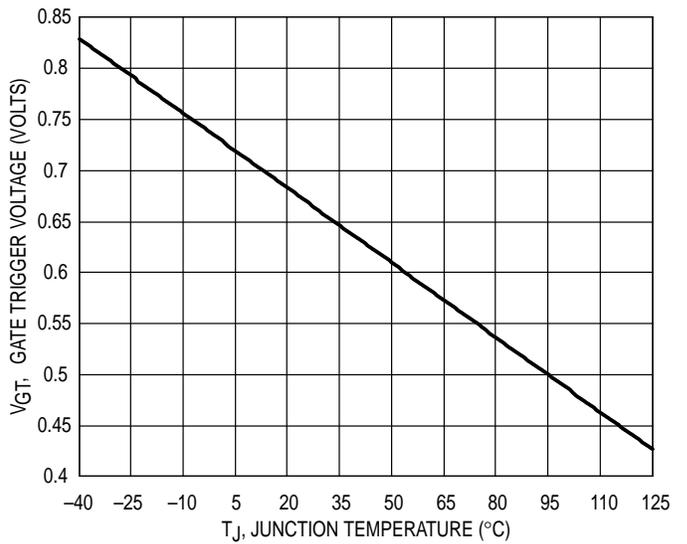


Figure 8. Typical Gate Trigger Voltage Versus Junction Temperature

MCR25 SERIES

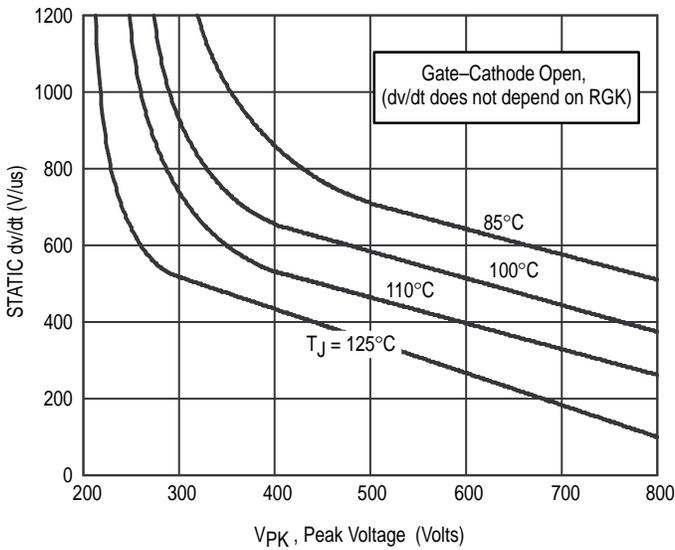


Figure 9. Typical Exponential Static dv/dt Versus Peak Voltage.

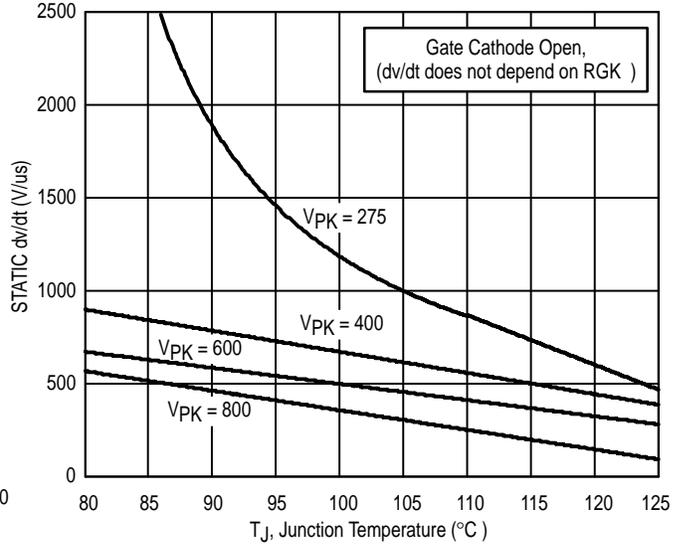


Figure 10. Typical Exponential Static dv/dt Versus Junction Temperature.


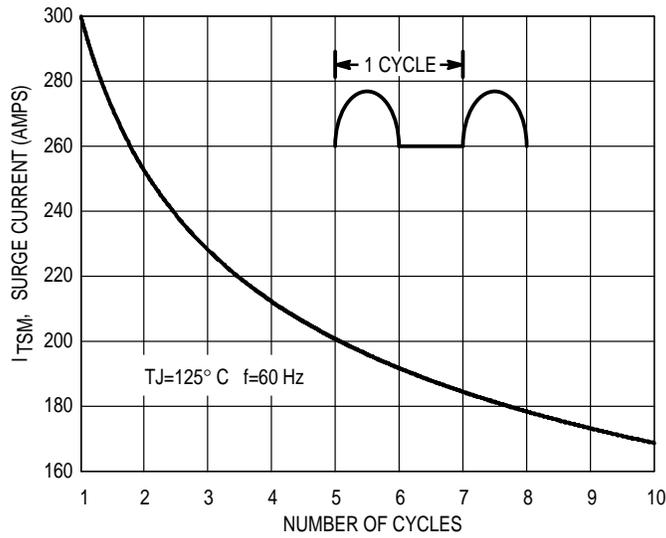


Figure 11. Maximum Non-Repetitive Surge Current

PACKAGE DIMENSIONS

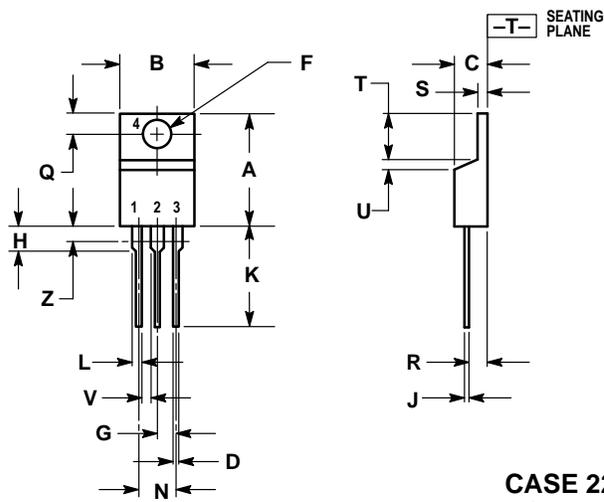

STYLE 3:
 PIN 1. CATHODE
 2. ANODE
 3. GATE
 4. ANODE

CASE 221A-06
 (TO-220AB)

- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

| DIM | INCHES | | MILLIMETERS | |
|-----|--------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.570 | 0.620 | 14.48 | 15.75 |
| B | 0.380 | 0.405 | 9.66 | 10.28 |
| C | 0.160 | 0.190 | 4.07 | 4.82 |
| D | 0.025 | 0.035 | 0.64 | 0.88 |
| F | 0.142 | 0.147 | 3.61 | 3.73 |
| G | 0.095 | 0.105 | 2.42 | 2.66 |
| H | 0.110 | 0.155 | 2.80 | 3.93 |
| J | 0.018 | 0.025 | 0.46 | 0.64 |
| K | 0.500 | 0.562 | 12.70 | 14.27 |
| L | 0.045 | 0.060 | 1.15 | 1.52 |
| N | 0.190 | 0.210 | 4.83 | 5.33 |
| Q | 0.100 | 0.120 | 2.54 | 3.04 |
| R | 0.080 | 0.110 | 2.04 | 2.79 |
| S | 0.045 | 0.055 | 1.15 | 1.39 |
| T | 0.235 | 0.255 | 5.97 | 6.47 |
| U | 0.000 | 0.050 | 0.00 | 1.27 |
| V | 0.045 | — | 1.15 | — |
| Z | — | 0.080 | — | 2.04 |

MCR25 SERIES

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA / EUROPE: Motorola Literature Distribution;
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,
6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

MFAX: RMFAX0@email.sps.mot.com – TOUCHTONE (602) 244-6609
INTERNET: <http://Design-NET.com>

HONG KONG: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298



MCR25/D

