


SN10KHT5542, SN10KHT5543 OCTAL TTL-TO-ECL TRANSLATORS WITH OUTPUT ENABLE

D3136, AUGUST 1988—REVISED DECEMBER 1988

- 10KH Compatible
- ECL and TTL Control Inputs
- P-N-P Inputs Reduce DC Loading
- Flow-Through Architectures Optimizes PCB Layout
- Center Pin V_{CC} , V_{EE} and GND Configurations Minimize High-Speed Switching Noise
- ESD Protection Exceeds 2000 V Per MIL-STD-883C, Method 3015
- Package Options Include "Small Outline" Packages and Standard Plastic 300-mil DIPs

DW OR NT PACKAGE
(TOP VIEW)

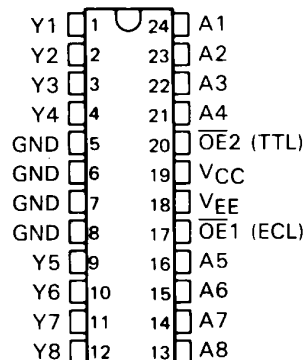

description



These octal TTL-to-ECL translators are designed to provide efficient translation between a TTL signal environment and a 10KH ECL signal environment. The designer has a choice of inverting ('5542) or true ('5543) outputs. Two pins, $\overline{OE}1$ and $\overline{OE}2$, are provided for output enable control. These control inputs are negative ANDed together, with $\overline{OE}1$ being ECL compatible and $\overline{OE}2$ being TTL compatible. This offers the choice of controlling the outputs of the device from either a TTL or ECL signal environment. The outputs, when disabled, go to a normal ECL logic low level.

The SN10KHT5542 and SN10KHT5543 are characterized for operation from 0°C to 75°C.

FUNCTION TABLE

OUTPUT CONTROL		DATA INPUT	OUTPUT	
$\overline{OE}1$	$\overline{OE}2$	A	'5542	'5543
H	X	X	L	L
X	H	X	L	L
L	L	L	H	L
L	L	H	L	H

logic symbols†

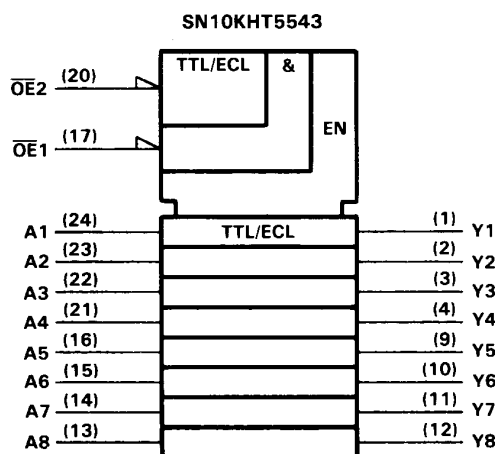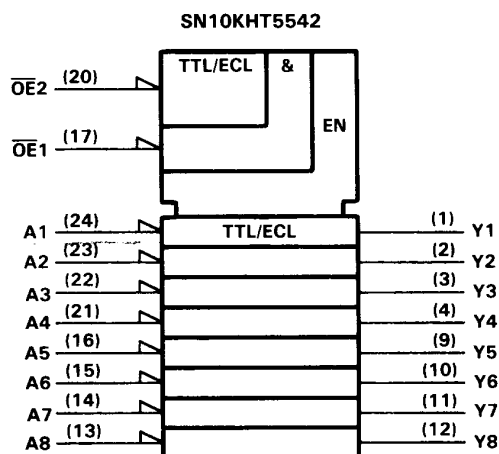

†These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



TEXAS
INSTRUMENTS

Copyright © 1988, Texas Instruments Incorporated

SN10KHT5542, SN10KHT5543 OCTAL TTL-TO-ECL TRANSLATORS WITH OUTPUT ENABLE

D3136, AUGUST 1988—REVISED DECEMBER 1988

logic diagrams (positive logic)

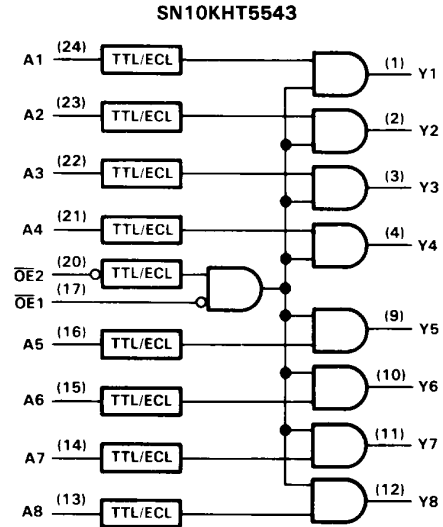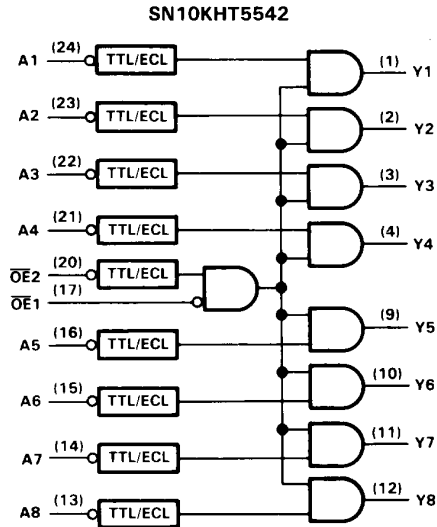

absolute maximum ratings over operating ambient temperature range (unless otherwise noted)[†]

Supply voltage range, V_{CC}	−0.5 V to 7 V
Supply voltage range, V_{EE}	−8 V to 0 V
Input voltage range (TTL) (See Note 1)	−1.2 V to 7 V
Input voltage range (ECL)	V_{EE} to 0 V
Input current range (TTL)	−30 mA to 5 mA
Operating ambient temperature range	0°C to 75°C
Storage temperature range	−65°C to 150°C

[†]Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The input voltage ratings may be exceeded provided the input current ratings are observed.

recommended operating conditions (see Note 2)

		MIN	NOM	MAX	UNIT
V_{CC}	TTL supply voltage	4.5	5.0	5.5	V
V_{EE}	ECL supply voltage	−4.94	−5.2	−5.46	V
V_{IH}	TTL high-level input voltage	2			V
V_{IH}	ECL high-level input voltage [‡]	0°C	−1170	−840	mV
		25°C	−1130	−810	
		75°C	−1070	−735	
V_{IL}	TTL low-level input voltage			0.8	V
V_{IL}	ECL low-level input voltage [‡]	0°C	−1950	−1480	mV
		25°C	−1950	−1480	
		75°C	−1950	−1450	
I_{IK}	TTL input clamp current			−18	mA
T_A	Operating ambient temperature (see Note 3)	0		75	°C

[‡] The algebraic convention, in which the least positive (most negative) value is designated minimum, is used in this data sheet for logic voltage levels and temperature only.

NOTES: 2. If unused, OE1 should be tied directly to −2 V.

3. Each 10KH series circuit has been designed to meet the dc specifications shown in the electrical characteristics table after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board, and transverse air flow greater than 500 linear ft/min is maintained.

SN10KHT5542

OCTAL TTL-TO-ECL TRANSLATOR WITH OUTPUT ENABLE

D3136, AUGUST 1988—REVISED DECEMBER 1988

electrical characteristics over recommended operating ambient temperature range (unless otherwise noted) (see Note 2)

PARAMETER	TEST CONDITIONS	MIN	TYP [†]	MAX	UNIT
V_{IK}	A inputs and $\overline{OE}2$ $V_{CC} = 4.5 \text{ V}$, $V_{EE} = -4.94 \text{ V}$, $I_I = -18 \text{ mA}$			-1.2	V
I_I	A inputs and $\overline{OE}2$ $V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$, $V_I = 7 \text{ V}$			0.1	mA
I_{IH}	A inputs and $\overline{OE}2$ $V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$, $V_I = 2.7 \text{ V}$			20	μA
	$\overline{OE}1$ only	$V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$, $V_I = -840 \text{ mV}$	0°C	350	
		$V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$, $V_I = -810 \text{ mV}$	25°C	350	
		$V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$, $V_I = -735 \text{ mV}$	75°C	350	
I_{IL}	A inputs and $\overline{OE}2$ $V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$, $V_I = 0.5 \text{ V}$			-500	μA
	$\overline{OE}1$ only	$V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$, $V_I = -1950 \text{ mV}$	0°C	0.5	
			25°C	0.5	
			75°C	0.5	
V_{OH}^{\ddagger}	$V_{CC} = 4.5 \text{ V}$, $V_{EE} = -5.2 \text{ V}$, $\pm 5\%$, See Note 3	0°C	-1020	-840	mV
		25°C	-980	-810	
		75°C	-920	-735	
V_{OL}^{\ddagger}	$V_{CC} = 4.5 \text{ V}$, $V_{EE} = -5.2 \text{ V}$, $\pm 5\%$, See Note 3	0°C	-1950	-1630	mV
		25°C	-1950	-1630	
		75°C	-1950	-1600	
I_{CCH}	$V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$		15	22	mA
I_{CCL}	$V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$		17	25	mA
I_{EE}	$V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$		-78	-111	mA
C_i	$V_{CC} = 5 \text{ V}$, $V_{EE} = -5.2 \text{ V}$, $f = 10 \text{ MHz}$		5		pF

switching characteristics over recommended ranges of operating ambient temperature and supply voltage (unless otherwise noted) (see Note 4)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	MIN	TYP [†]	MAX	UNIT
t_{PLH}	Any A	Y	0.1	1.7	3.7	ns
t_{PHL}			0.1	1.6	3.3	
t_{PLH}	$\overline{OE}1$ (ECL)	Y	0.8	2.8	5	ns
t_{PHL}			0.4	2.3	4.5	
t_{PLH}	$\overline{OE}2$ (TTL)	Y	0.8	3	5.3	ns
t_{PHL}			0.6	2.5	4.7	
t_r		Y		1.5		ns
t_f				1.5		

[†] All typical values are at $V_{CC} = 5 \text{ V}$, $V_{EE} = -5.2 \text{ V}$, $T_A = 25^\circ\text{C}$.

[‡] The algebraic convention, in which the least positive (most negative) value is designated minimum, is used in this data sheet for logic voltage levels and temperature only.

NOTES: 2. Each 10KH series circuit has been designed to meet the dc specifications shown in the electrical characteristics table after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear ft/min is maintained.

3. Outputs are terminated through a 50- Ω resistor to -2 V.

4. Load circuit and switching waveforms are shown in Section 1.

SN10KHT5543

OCTAL TTL-TO-ECL TRANSLATOR WITH OUTPUT ENABLE

D3136, AUGUST 1988—REVISED DECEMBER 1988

electrical characteristics over recommended operating ambient temperature range (unless otherwise noted) (see Note 2)

PARAMETER	TEST CONDITIONS	MIN	TYP†	MAX	UNIT
V_{IK}	A inputs and $\overline{OE}2$ $V_{CC} = 4.5 \text{ V}$, $V_{EE} = -4.94 \text{ V}$, $I_I = -18 \text{ mA}$			-1.2	V
I_I	A inputs and $\overline{OE}2$ $V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$, $V_I = 7 \text{ V}$			0.1	mA
I_{IH}	A inputs and $\overline{OE}2$ $V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$, $V_I = 2.7 \text{ V}$			20	μA
	$\overline{OE}1$ only	$V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$, $V_I = -840 \text{ mV}$	0°C	350	
		$V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$, $V_I = -810 \text{ mV}$	25°C	350	
		$V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$, $V_I = -735 \text{ mV}$	75°C	350	
I_{IL}	A inputs and $\overline{OE}2$ $V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$, $V_I = 0.5 \text{ V}$			-500	μA
	$\overline{OE}1$ only	$V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$, $V_I = -1950 \text{ mV}$	0°C	0.5	
			25°C	0.5	
			75°C	0.5	
V_{OH}^\ddagger	$V_{CC} = 4.5 \text{ V}$, $V_{EE} = -5.2 \text{ V}$, $\pm 5\%$, See Note 3	0°C	-1020	-840	mV
		25°C	-980	-810	
		75°C	-920	-735	
V_{OL}^\ddagger	$V_{CC} = 4.5 \text{ V}$, $V_{EE} = -5.2 \text{ V}$, $\pm 5\%$, See Note 3	0°C	-1950	-1630	mV
		25°C	-1950	-1630	
		75°C	-1950	-1600	
I_{CCH}	$V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$		17	25	mA
I_{CCL}	$V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$		15	22	mA
I_{EE}	$V_{CC} = 5.5 \text{ V}$, $V_{EE} = -5.46 \text{ V}$		-77	-111	mA
C_i	$V_{CC} = 5 \text{ V}$, $V_{EE} = -5.2 \text{ V}$, $f = 10 \text{ MHz}$		5		pF

switching characteristics over recommended ranges of operating ambient temperature and supply voltage (unless otherwise noted) (see Note 4)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	MIN	TYP†	MAX	UNIT
t_{PLH}	Any A	Y	0.1	1.5	3	ns
t_{PHL}			0.1	1.5	3.3	
t_{PLH}	$\overline{OE}1$ (ECL)	Y	0.6	2.2	4.3	ns
t_{PHL}			0.5	2.4	4.3	
t_{PLH}	$\overline{OE}2$ (TTL)	Y	0.7	2.2	4.4	ns
t_{PHL}			0.5	2.6	4.7	
t_r		Y		1.5		ns
t_f				1.5		

† All typical values are at $V_{CC} = 5 \text{ V}$, $V_{EE} = -5.2 \text{ V}$, $T_A = 25^\circ\text{C}$.

‡ The algebraic convention, in which the least positive (most negative) value is designated minimum, is used in this data sheet for logic voltage levels and temperature only.

NOTES: 2. Each 10KH series circuit has been designed to meet the dc specifications shown in the electrical characteristics table after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear ft/min is maintained.

3. Outputs are terminated through a 50- Ω resistor to -2 V .

4. Load circuit and voltage waveforms are shown in Section 1.

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.