


The RF Line UHF Linear Amplifier

Designed specifically for linear amplifier applications in the cellular frequency band. Internal DC blocking on RF ports reduces external component count and related circuit area. These devices can be easily combined for higher power applications.

- Supply Voltage: 15 Vdc (MHL9125)
28 Vdc (MHL9128)
- Third Order Intercept: 43 dBm Typ
- Power Gain: 20 dB Typ (@ f = 900 MHz)
- Excellent Phase Linearity and Group Delay Characteristics
- 50 Ohm Input/Output Impedances

MHL9125
MHL9128

1.3 W, 20 dB
800–960 MHz
LINEAR AMPLIFIERS



CASE 448-01
MHL9125, Style 2
MHL9128, Style 1


ABSOLUTE MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$ unless otherwise stated)

Rating	Symbol	Value	Unit
DC Supply Voltage	V_{CC}	18 32	Vdc
RF Input Power	P_{in}	+20	dBm
Operating Case Temperature Range	T_C	–20 to +100	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	–40 to +100	$^\circ\text{C}$


ELECTRICAL CHARACTERISTICS ($V_{CC} = 15\text{ Vdc}$ (MHL9125), 28 Vdc (MHL9128); $T_C = 25^\circ\text{C}$; 50 Ω System, unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Supply Current	I_{DC}	400 700	— —	440 760	mA
Power Gain (1)	P_G	19	20	21	dB
Absolute Phase Variation (1)	$\Delta\phi$		± 8	± 18	Deg.
Gain Flatness	G_F	—	0.5	0.75	dB
Power Output @ 1 dB Comp.	$P_{out\ 1\ dB}$	30	31	—	dBm
Input VSWR	$VSWR_{in}$	— —	1.25:1 1.50:1	1.5:1 1.9:1	
Output VSWR	$VSWR_{out}$	—	1.2:1	1.5:1	
Third Order Intercept ($f_1 = 879\text{ MHz}$, $f_2 = 884\text{ MHz}$)	ITO	42	43	—	dBm
Noise Figure	NF	—	7.5	9.5	dB

(1) Consult factory for tighter gain and/or phase windows.


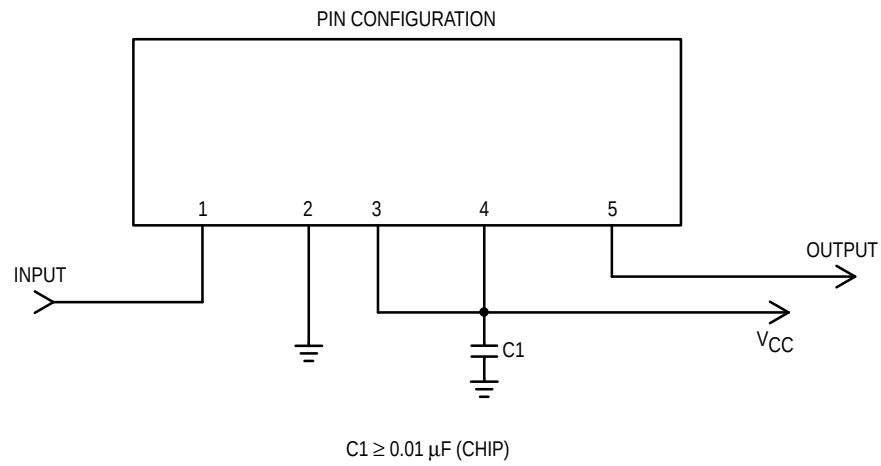


**Figure 1. MHL9125 External Connections
(Case 448-01, Style 2)**

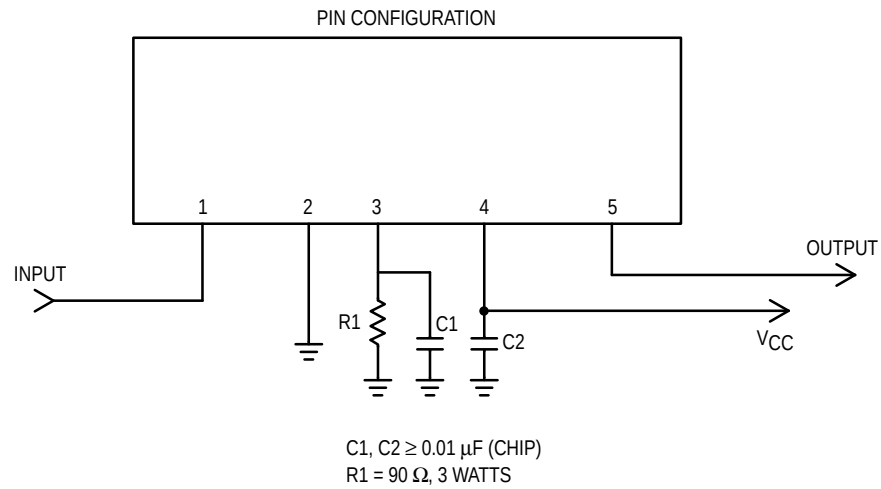

**Figure 2. MHL9128 External Connections
(Case 448-01, Style 1)**

PACKAGE DIMENSIONS

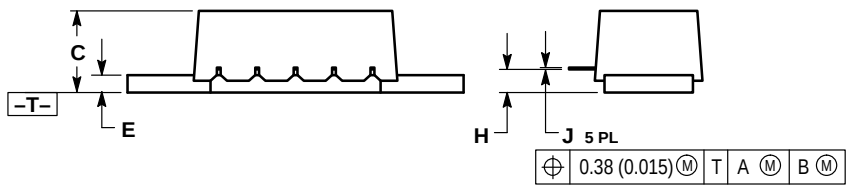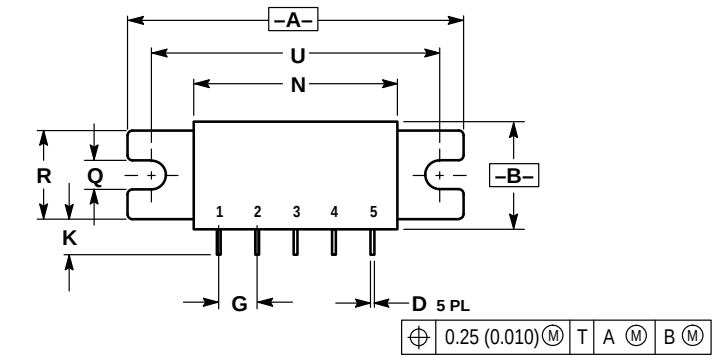

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.740	1.760	44.20	44.70
B	0.550	0.570	13.97	14.49
C	0.405	0.445	10.29	11.30
D	0.018	0.022	0.46	0.55
E	0.085	0.095	2.16	2.41
G	0.200 BSC		5.08 BSC	
H	0.120 BSC		3.05 BSC	
J	0.009	0.011	0.23	0.28
K	0.170	0.210	4.32	5.33
N	1.045	1.075	26.54	27.30
Q	0.145	0.155	3.68	3.94
R	0.455	0.465	11.56	11.81
U	1.490	1.510	37.85	38.35

- STYLE 1:
- PIN 1. RF INPUT
 - 2. GROUND
 - 3. RESISTOR-GROUND
 - 4. VCC
 - 5. RF OUTPUT
- STYLE 2:
- PIN 1. RF INPUT
 - 2. GROUND
 - 3. VCC1
 - 4. VCC2
 - 5. RF OUTPUT

CASE 448-01
ISSUE O

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA / EUROPE: Motorola Literature Distribution;
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,
6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE (602) 244-6609
INTERNET: <http://Design-NET.com>

HONG KONG: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298



MOTOROLA



MHL9125/D

