


The RF Line

128-Channel (860 MHz) CATV Line Extender Amplifier

- Specified for 128-Channel Performance
- Broadband Power Gain — @ $f = 40\text{--}860\text{ MHz}$
 $G_p = 24\text{ dB (Typ)}$
- Broadband Noise Figure
 $NF = 7.5\text{ dB (Max)}$ @ 860 MHz
- Superior Gain, Return Loss and DC Current Stability with Temperature
- All Gold Metallization
- $7\text{ GHz } f_T$ Ion-Implanted Transistors

MHW8242

**24 dB GAIN
860 MHz
128-CHANNEL
CATV AMPLIFIER**



CASE 714-06, STYLE 1


MAXIMUM RATINGS

Rating	Symbol	Value	Unit
RF Voltage Input (Single Tone)	V_{in}	+55	dBmV
DC Supply Voltage	V_{CC}	+28	Vdc
Operating Case Temperature Range	T_C	-20 to +100	°C
Storage Temperature Range	T_{stg}	-40 to +100	°C

ELECTRICAL CHARACTERISTICS ($V_{CC} = 24\text{ Vdc}$, $T_C = +30^\circ\text{C}$, $75\ \Omega$ system unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Frequency Range	BW	40	—	860	MHz
Power Gain 50 MHz 860 MHz	G_p	23.2 24	24 25	24.8 26.5	dB
Slope 40–860 MHz	S	0	1	2.5	dB
Gain Flatness (40–860 MHz, Peak To Valley)	—	—	0.4	0.8	dB
Return Loss — Input/Output ($Z_0 = 75\text{ Ohms}$) @ 40 MHz @ $f > 40\text{ MHz}$ (Derate)	IRL/ORL	20 —	— —	— 0.007	dB dB/MHz
Composite Second Order ($V_{out} = +38\text{ dBmV/ch.}$, Worst Case)	CSO_{128}	—	-65	-60	dBc
Cross Modulation Distortion @ Ch 2 ($V_{out} = +38\text{ dBmV/ch.}$, FM = 55 MHz) 128-Channel FLAT	XMD_{128}	—	-65	-60	dBc
Composite Triple Beat ($V_{out} = +38\text{ dBmV/ch.}$, Worst Case) 128-Channel FLAT	CTB_{128}	—	-63	-60	dBc
Noise Figure 50 MHz 860 MHz	NF	— —	— —	5.5 7.5	dB
DC Current	I_{DC}	280	—	350	mA

PACKAGE DIMENSIONS

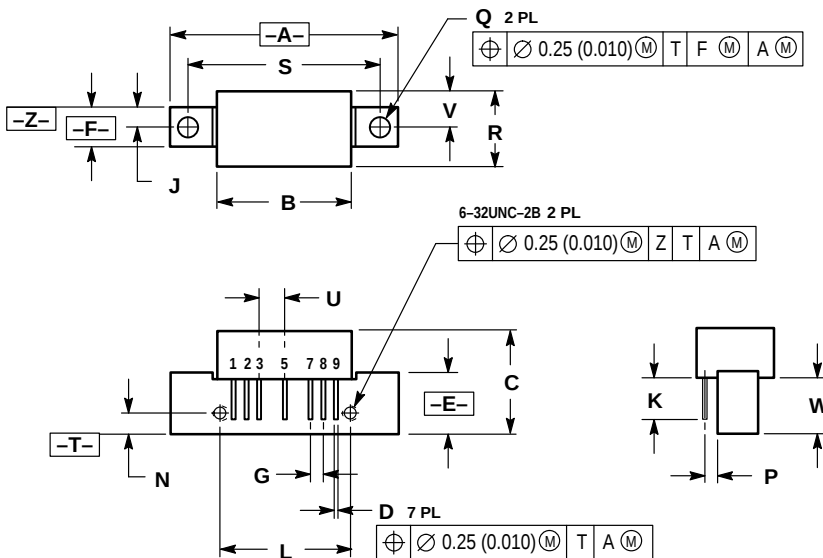

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	—	1.775	—	45.08
B	—	1.085	—	27.56
C	—	0.840	—	21.34
D	0.018	0.022	0.46	0.56
E	0.465	0.510	11.81	12.95
F	0.300	0.325	7.62	8.25
G	0.100 BSC		2.54 BSC	
J	0.156 BSC		3.96 BSC	
K	0.315	0.355	8.00	8.50
L	1.00 BSC		25.40 BSC	
N	0.165 BSC		4.10 BSC	
P	0.100 BSC		2.54 BSC	
Q	0.148	0.168	3.76	4.27
R	—	0.595	—	15.11
S	1.500 BSC		38.10 BSC	
U	0.200 BSC		5.08 BSC	
V	0.280 BSC		7.11 BSC	
W	0.435	0.450	11.05	11.43

STYLE 1:

- PIN 1. RF INPUT
- GROUND
- GROUND
- DELETED
- VDC
- DELETED
- GROUND
- GROUND
- RF OUTPUT

**CASE 714-06
ISSUE K**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA / EUROPE: Motorola Literature Distribution;
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,
6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE (602) 244-6609
INTERNET: http://Design-NET.com

HONG KONG: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298



MOTOROLA



MHW8242/D

