
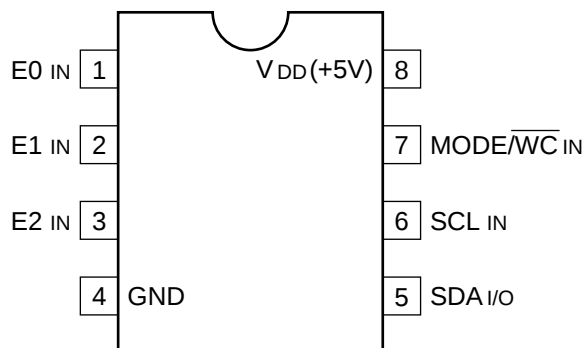

ST24C01CB1
IL08

C-MOS 1K (256x4)-BIT EEPROM - TOP VIEW -



INPUT

E0-E2 ; CHIP ENABLE

SCL ; SERIAL CLOCK

MODE ; MULTIBYTE/PAGE WRITE MODE (C VERSION)

WC ; WRITE CONTROL (W VERSION)

INPUT/OUTPUT

SDA ; SERIAL DATA ADDRESS

