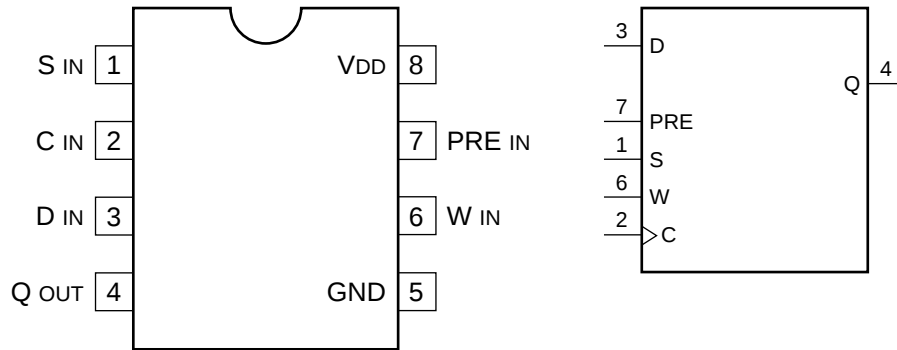


C-MOS SERIAL ACCESS 2 K (128 × 16)-BIT EEPROM

—TOP VIEW—

**INPUT**

C : SERIAL CLOCK
 D : SERIAL DATA
 PRE : PROTECT ENABLE
 S : CHIP SELECT
 W : WRITE ENABLE

OUTPUT

Q : SERIAL DATA