


* * * * *

C-MOS 2K (128x16)- BIT SERIAL ACCESS EEPROM -TOP VIEW-



S ; CHIP SELECT INPUT
D ; SERIAL DATA INPUT
C ; SERIAL CLOCK
PRE ; PROTECT ENABLE
W ; WRITE ENABLE
Q ; SERIAL DATA OUTPUT

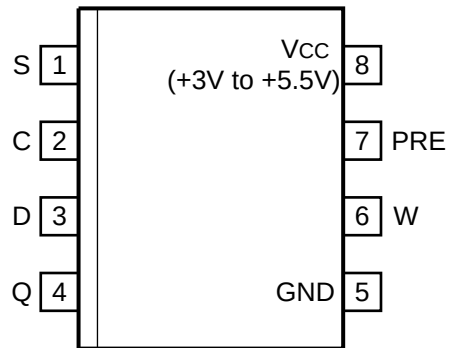