



SB20W03V

Schottky Barrier Diode (Twin Type · Cathode Common)

30V, 2A Rectifier

Applications

- High frequency rectification (switching regulators, converters, choppers).


Features

- Low forward voltage ($V_F \text{ max}=0.55\text{V}$).
- Fast reverse recovery time ($t_{rr} \text{ max}=20\text{ns}$).
- Low switching noise.
- Low leakage current and high reliability due to highly reliable planar structure.

Package Dimensions

unit:mm

1238A

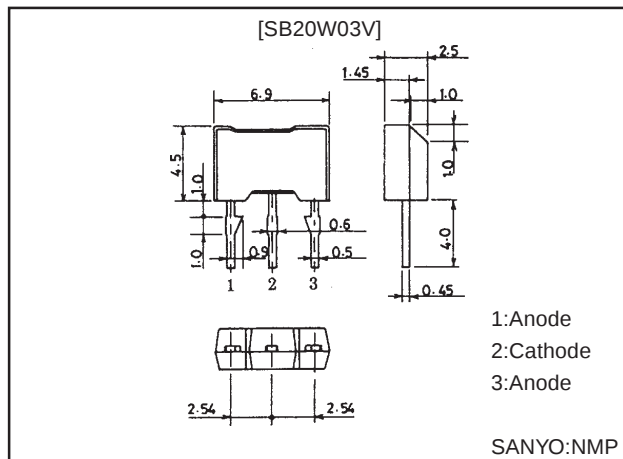

Specifications


Absolute Maximum Ratings at Ta = 25°C (Value per element)

Parameter	Symbol	Conditions	Ratings	Unit
Repetitive Peak Reverse Voltage	V_{RRM}		30	V
Nonrepetitive Peak Reverse Surge Voltage	V_{RSM}		35	V
Average Output Current	I_O		2	A
Surge Forward Current	I_{FSM}	50Hz sine wave, 1 cycle	20	A
Junction Temperature	T_j		–55 to +125	°C
Storage Temperature	T_{stg}		–55 to +125	°C


Electrical Characteristics at Ta = 25°C (Value per element)

Parameter	Symbol	Conditons	Ratings			Unit
			min	typ	max	
Reverse Voltage	V _R	I _R =500μA	30			V
Forward Voltage	V _F	I _F =2A			0.55	V
Reverse Current	I _R	V _R =15V			100	μA
Interteminal Capacitance	C	V _R =10V, f=1MHz		70		pF
Reverse Recovery Time	trr	I _F =I _R =100mA, See specifaied Test Circuit.			20	ns
Thermal Resistance	Rth(j-a)			110		°C/W

trr Test Circuit

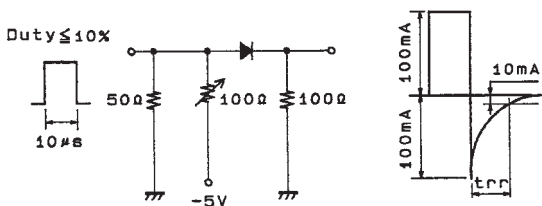







Electrical Connection



1:Anode
2:Cathode
3:Anode

(Top view)

SB20W03V

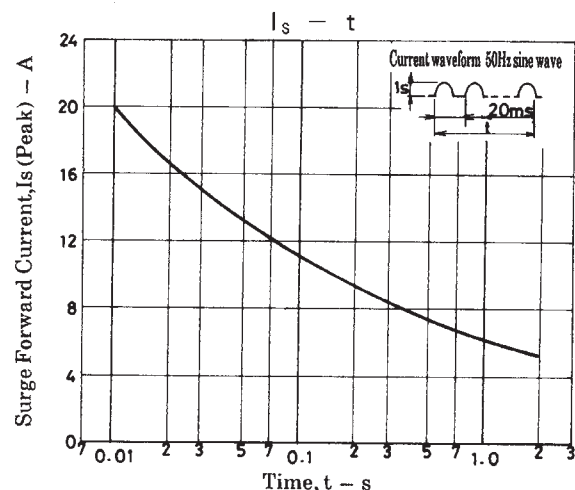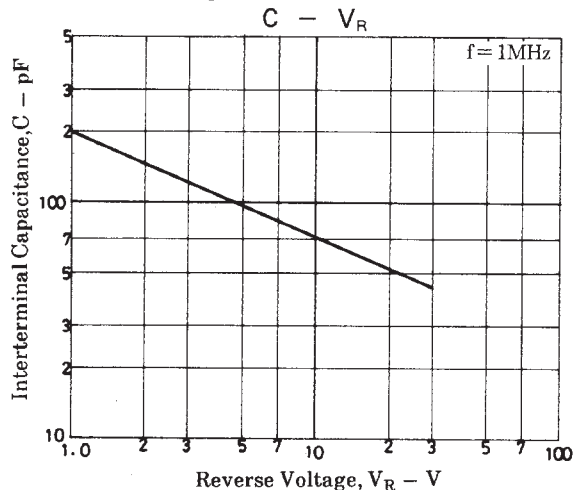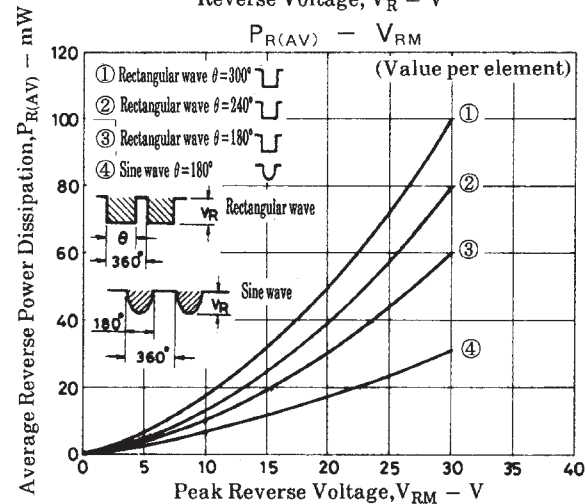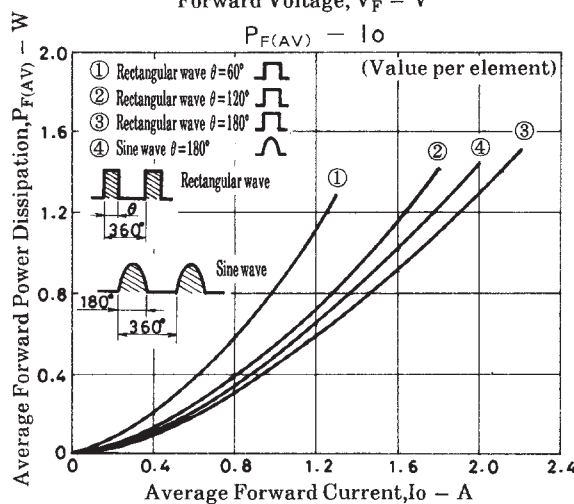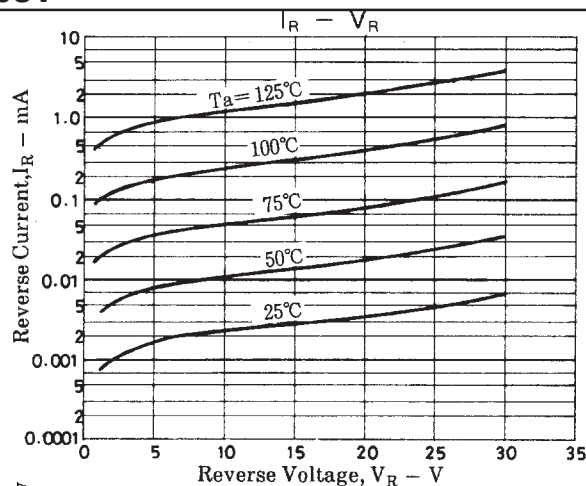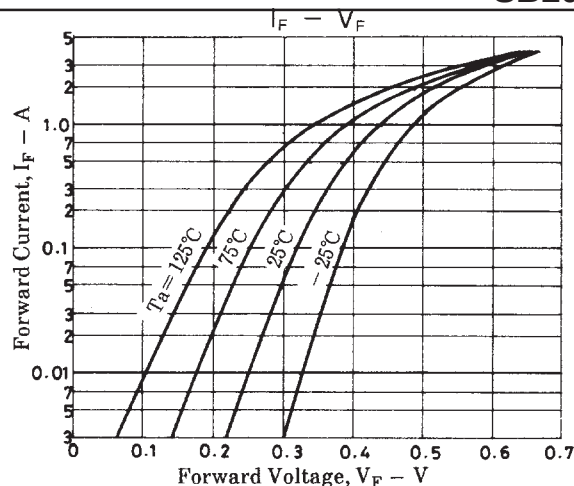

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of March, 1998. Specifications and information herein are subject to change without notice.