

SCHOTTKY RECTIFIERS

MAIN PRODUCT CHARACTERISTICS

$I_{F(AV)}$	0.5 A
V_{RRM}	30 V
V_F (max)	0.33 V

FEATURES AND BENEFITS

- VERY SMALL CONDUCTION LOSSES
- NEGLIGIBLE SWITCHING LOSSES
- EXTREMELY FAST SWITCHING

DESCRIPTION

Single Schottky rectifier suited for switch mode power supplies and high frequency DC to DC converters.

Packaged in SOD-123, this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications. Due to the small size of the package this device fits GSM and PCMCIA requirements.



SOD-123

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter	Value	Unit
V_{RRM}	Repetitive peak reverse voltage	30	V
$I_{F(RMS)}$	RMS forward current	2	A
$I_{F(AV)}$	Average forward current $\delta=0.5$	Ta=55°C	A
I_{FSM}	Surge non repetitive forward current	tp=10ms sinusoidal	A
dV/dt	Critical rate of rise of reverse voltage	10000	V/ μ s
T_{stg}	Storage temperature range	- 65 to + 125	°C
T_j	Maximum operating junction temperature *	125	°C
TL	Maximum temperature for soldering during 10s	260	°C

* : $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th}(j - a)}$ thermal runaway condition for a diode on its own heatsink

STPS0530Z

THERMAL RESISTANCE

Symbol	Parameter	Value	Unit
R _{th} (j-a)	Junction to ambient	340 *	°C/W

(*) Copper area on PCB S = 2.5mm²

STATIC ELECTRICAL CHARACTERISTICS

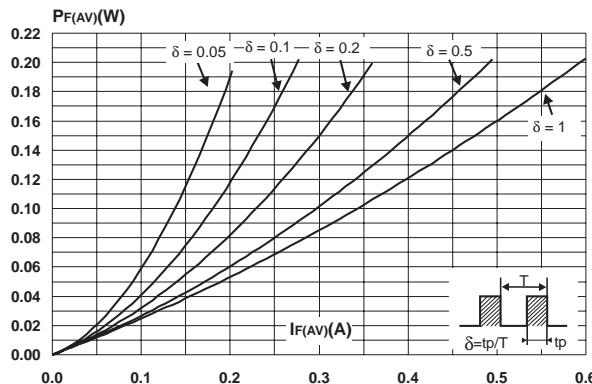
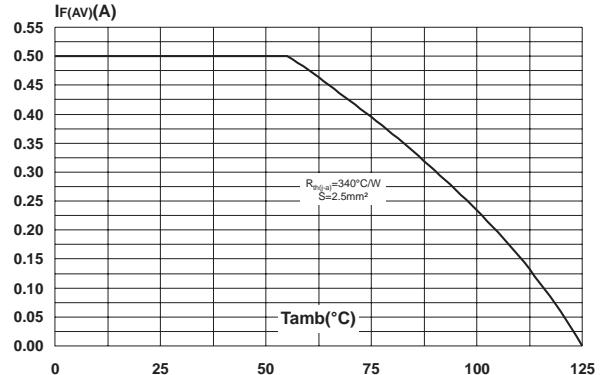
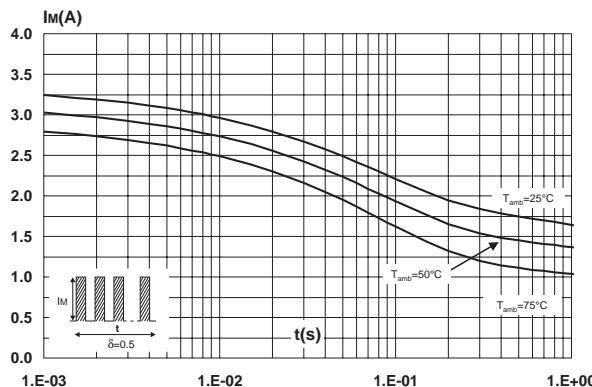
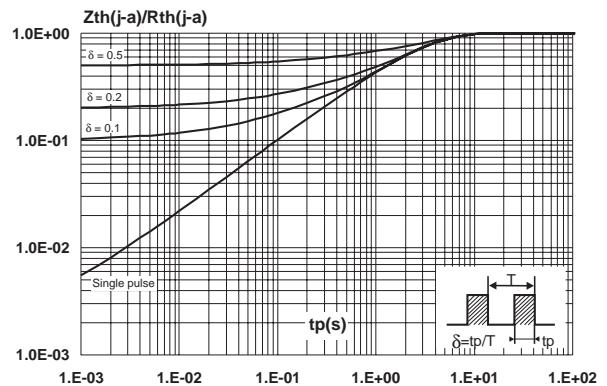
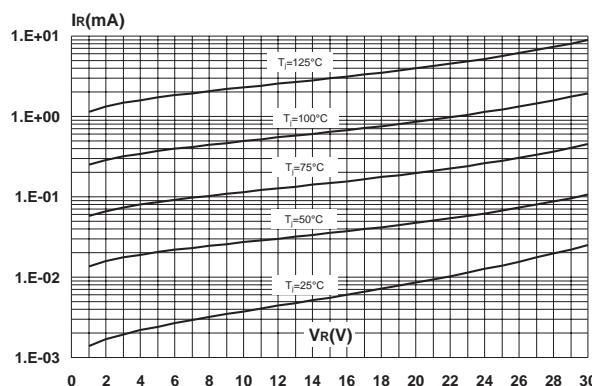
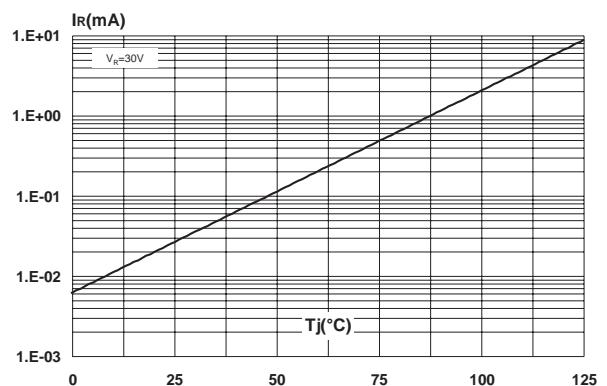
Symbol	Parameter	Tests conditions		Value		Unit
				STPS0530Z		
		typ.	max.			
I _R *	Reverse leakage current	T _j = 25°C	V _R = 15 V		12	μA
		T _j = 125°C		3	5	mA
		T _j = 25°C	V _R = V _{RRM}		130	μA
		T _j = 125°C		9	21	mA
V _F **	Forward voltage drop	T _j = 25°C	I _F = 0.1 A		0.375	V
		T _j = 125°C		0.20	0.22	
		T _j = 25°C	I _F = 0.5 A		0.43	
		T _j = 125°C		0.31	0.33	

Pulse test : * tp = 5 ms, δ < 2%

** tp = 380 μs, δ < 2%

To evaluate the maximum conduction losses use the following equation :

$$P = 0.23 \times I_{F(AV)} + 0.18 \times I_F^2(RMS)$$

Fig. 1: Conduction losses versus average current.**Fig. 2:** Average forward current versus ambient temperature ($\delta = 0.5$)**Fig. 3:** Non repetitive surge peak forward current versus overload duration (maximum values).**Fig. 4:** Relative variation of thermal impedance junction to ambient versus pulse duration.**Fig. 5:** Reverse leakage current versus reverse voltage applied (typical values).**Fig. 6:** Reverse leakage current versus junction temperature (typical values).

STPS0530Z

Fig. 7: Junction capacitance versus reverse voltage applied (typical values).

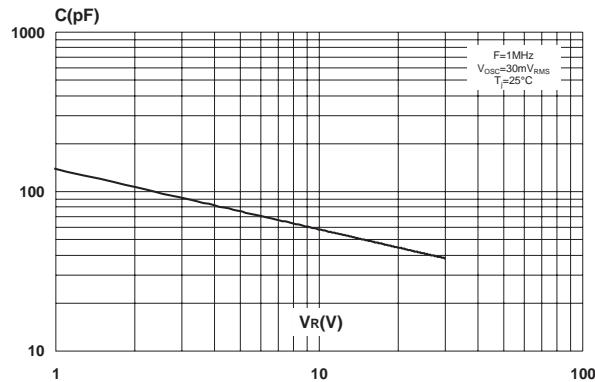


Fig. 8: Forward voltage drop versus forward current.

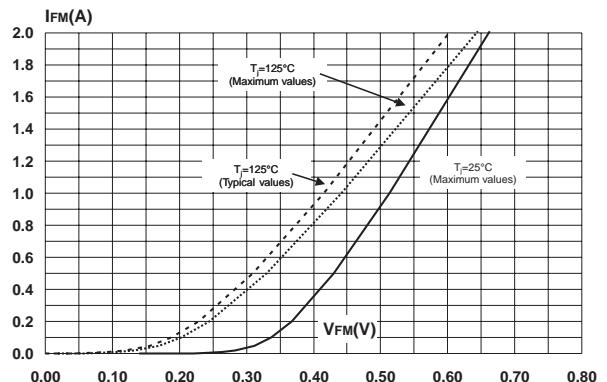
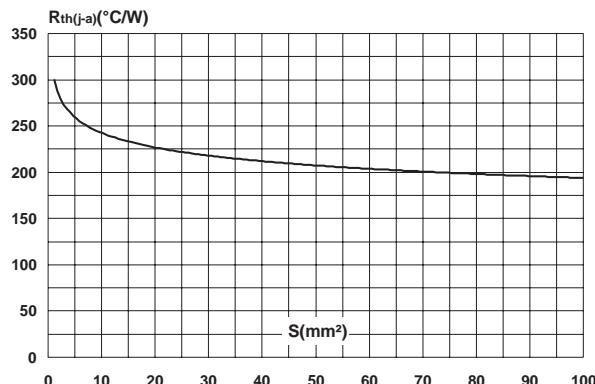
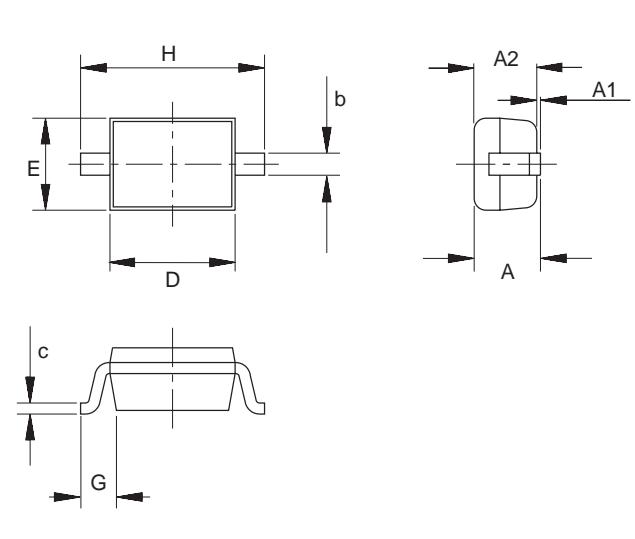


Fig. 9: Thermal resistance junction to ambient versus copper surface under each lead (epoxy printed board FR4, Cu=35 μm , typical values).



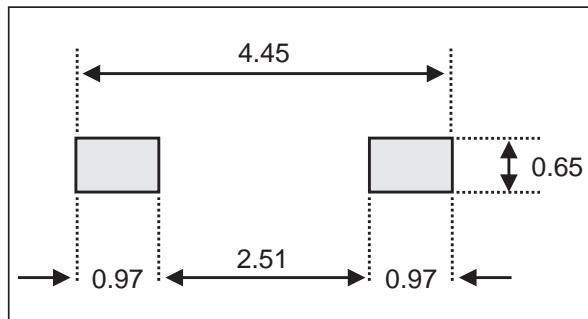
PACKAGE MECHANICAL DATA

SOD-123



REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A		1.45		0.057
A1	0	0.1	0	0.004
A2	0.85	1.35	0.033	0.053
b	0.55 Typ.		0.022 Typ.	
c	0.15 Typ.		0.039 Typ.	
D	2.55	2.85	0.1	0.112
E	1.4	1.7	0.055	0.067
G	0.25		0.01	
H	3.55	3.95	0.14	0.156

FOOTPRINT (in millimeters)



MARKING

Type	Marking	Package	Weight	Base qty	Delivery mode
STPS0530Z	Z53	SOD-123	0.01g.	3000	Tape & reel

- Epoxy meets UL94, V0.
- Band indicates cathode.

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2003 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany
 Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore
 Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>