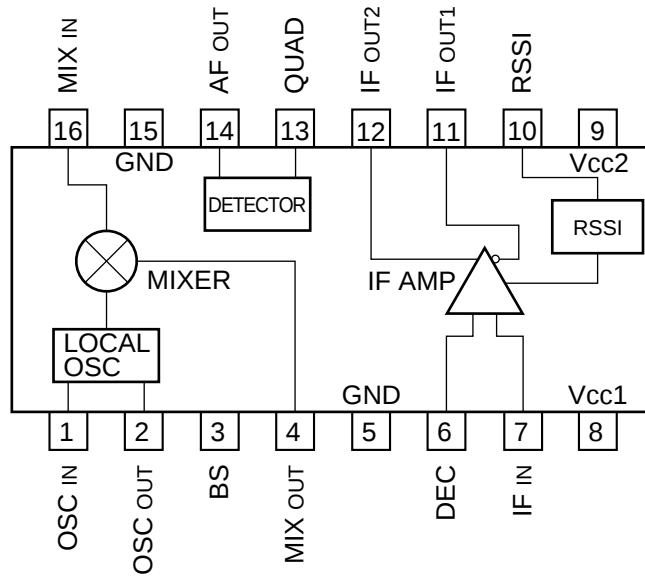

TA31161FN
IL00

IF DETECTOR

—TOP VIEW—



OSC IN, OUT ; LOCAL OSC INPUT

BS ; BATTERY SAVE

MIXER OUT ; MIXER OUTPUT

DEC ; BIAS FOR IF INPUT

IF IN ; IF INPUT

RSSI ; RSSI OUTPUT

IF OUT1, 2 ; IF LIMITTER OUTPUT

QUAD ; PHASE INPUT FOR FM DETECTOR

AF OUT ; DEMODULATION SIGNAL OUTPUT

MIX IN ; MIXER INPUT