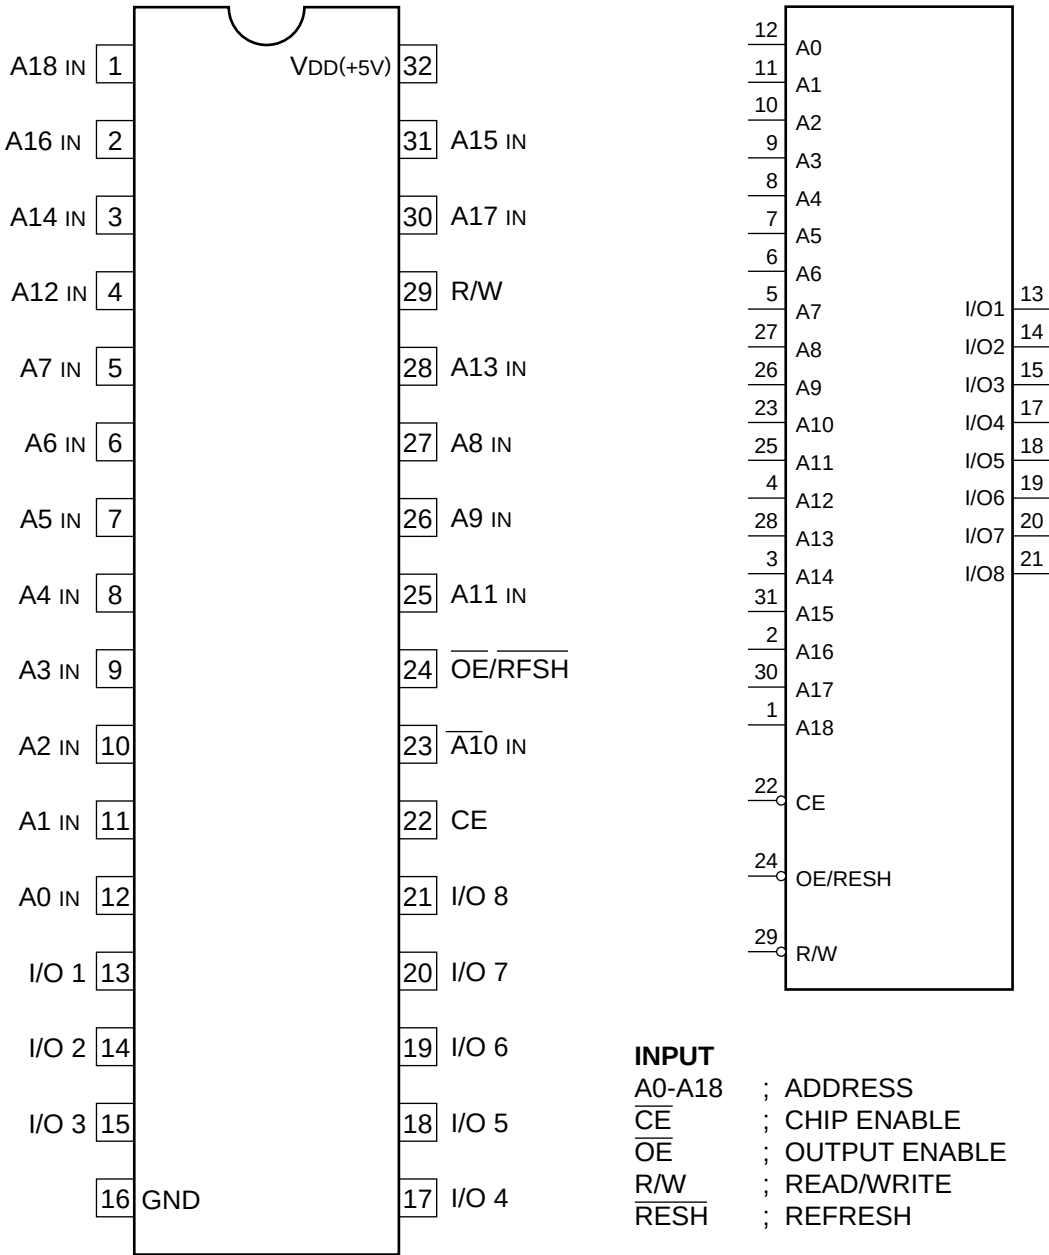

TC518512FL(1/2)
IL00

C-MOS 524,288WORDX8 BIT STATIC RAM
-TOP VIEW-



INPUT/OUTPUT
I/O1-I/O8 ; DATA

CE	$\overline{\text{OE}}/\text{RFSH}$	R/W	A0-A18	I/O1-I/O8	CONDITION
0	0	1	—	OUT	READ
0	X	0	—	IN	WRITE
0	1	1	—	HI-Z	$\overline{\text{CE}}$ ONLY REFRESH
1	0	X	X	HI-Z	AUTO/SELF REFRESH
1	1	X	X	HI-Z	STAND BY

0 ; LOW LEVEL
1 ; HIGH LEVEL
X ; DON'T CARE
HI-Z ; HIGH IMPEDANCE

