



## TSH151

### WIDE BANDWIDTH AND MOS INPUTS SINGLE OPERATIONAL AMPLIFIER

- LOW DISTORTION
- GAIN BANDWIDTH PRODUCT : 150MHz
- UNITY GAIN STABLE
- SLEW RATE : 200V/ $\mu$ s
- VERY FAST SETTLING TIME : 70ns (0.1%)
- VERY HIGH INPUT IMPEDANCE


#### DESCRIPTION:

The TSH151 is a wideband monolithic operational amplifier, internally compensated for unity-gain stability.

The TSH151 features extremely high input impedance (typically greater than  $10^{12}\Omega$ ) allowing direct interfacing with high impedance sources.

Low distortion, wide bandwidth and high linearity make this amplifier suitable for RF and video applications. Short circuit protection is provided by an internal current-limiting circuit.

The TSH151 has internal electrostatic discharge (ESD) protection circuits and fulfills MILSTD883C-Class2.

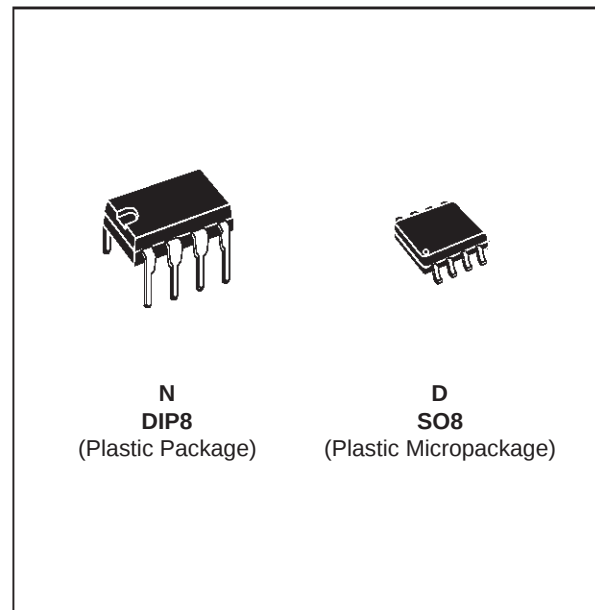


#### ORDER CODES

| Part Number | Temperature Range | Package |   |
|-------------|-------------------|---------|---|
|             |                   | N       | D |
| TSH151C     | 0°C, 70°C         | •       | • |
| TSH151I     | -40°C, 125°C      | •       | • |


151-01.TBL

#### PIN CONNECTIONS (top view)

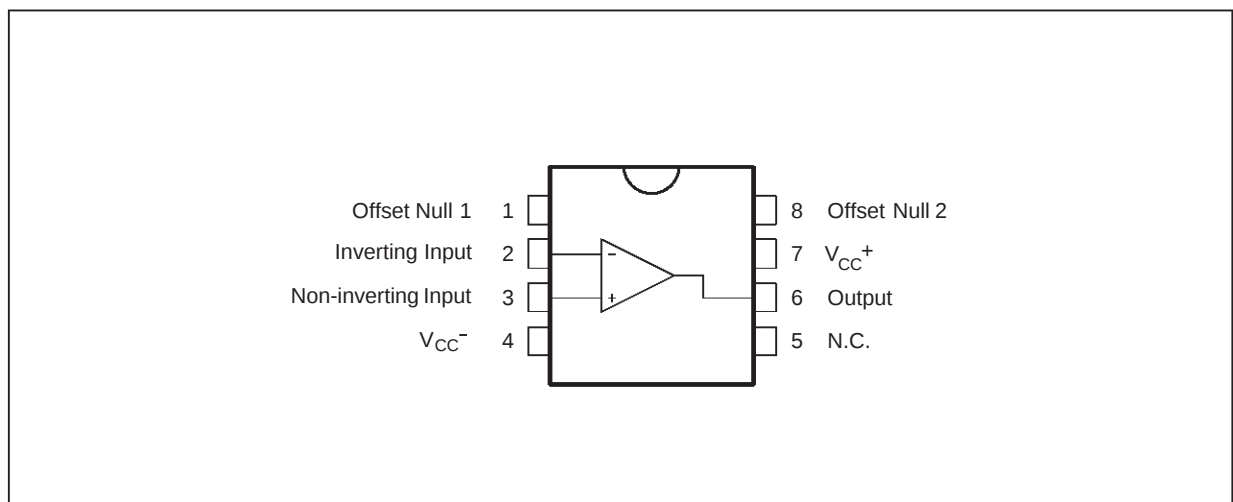


151-01.EPS

SCHEMATIC DIAGRAM

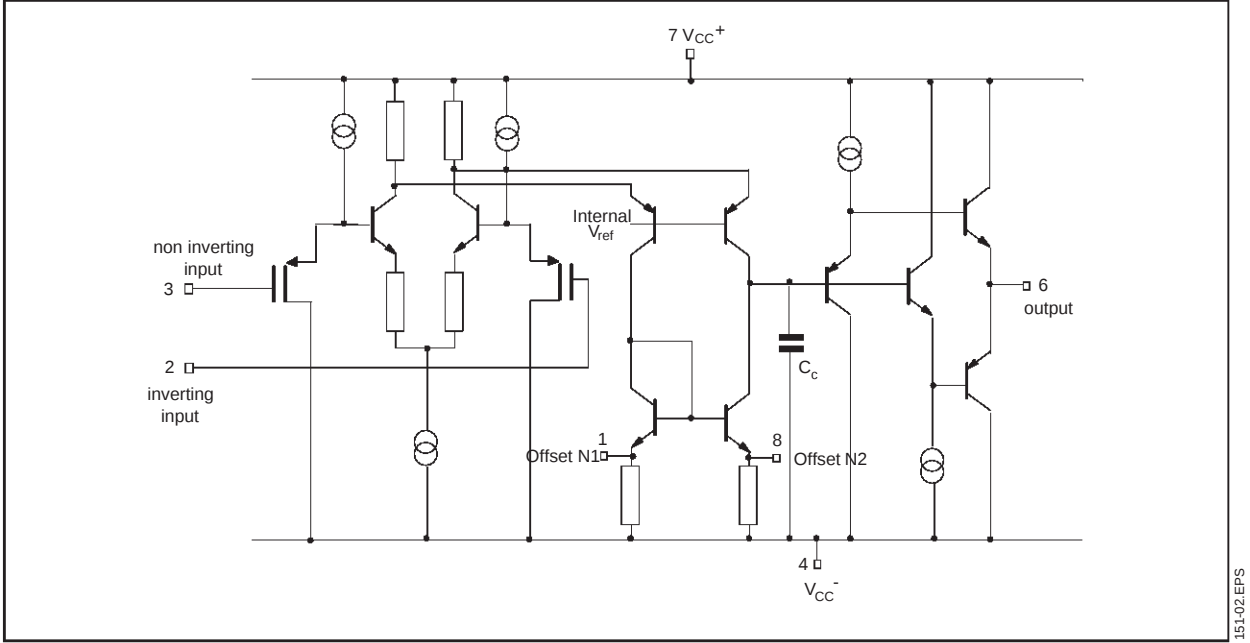

INPUT OFFSET VOLTAGE NULL CIRCUIT

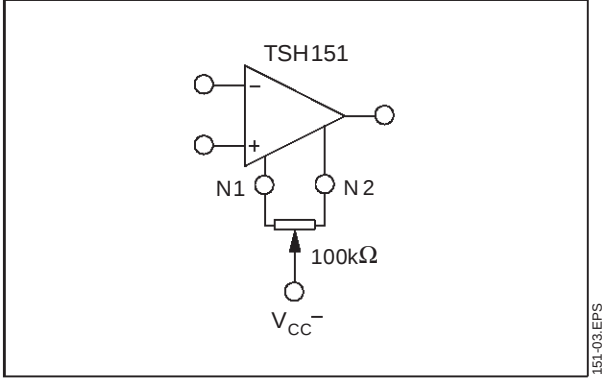

ABSOLUTE MAXIMUM RATINGS

| Symbol     | Parameter                            | Value                                                                                                      | Unit               |
|------------|--------------------------------------|------------------------------------------------------------------------------------------------------------|--------------------|
| $V_{CC}$   | Supply Voltage                       | $\pm 7$                                                                                                    | V                  |
| $V_{id}$   | Differential Input Voltage           | $\pm 5$                                                                                                    | V                  |
| $V_i$      | Input Voltage Range                  | $\pm 5$                                                                                                    | V                  |
| $I_{in}$   | Current On Offset Null Pins          | $\pm 20$                                                                                                   | mA                 |
| $T_{oper}$ | Operating Free-Air Temperature Range | TSH151C<br>TSH151I<br>$0^{\circ}\text{C}, 70^{\circ}\text{C}$<br>$-40^{\circ}\text{C}, 15^{\circ}\text{C}$ | $^{\circ}\text{C}$ |

OPERATING CONDITIONS

| Symbol   | Parameter                       | Value                            | Unit |
|----------|---------------------------------|----------------------------------|------|
| $V_{CC}$ | Supply Voltage                  | $\pm 3$ to $\pm 6$               | V    |
| $V_{ic}$ | Common Mode Input Voltage Range | $V_{CC}^{-}$ to $V_{CC}^{+} - 3$ | V    |


**ELECTRICAL CHARACTERISTICS** $V_{CC} = \pm 5V$ ,  $T_{amb} = 25^{\circ}C$  (unless otherwise specified)

| Symbol        | Parameter                                                                                                                                           | TSH151C, I                                     |                              |                      | Unit                   |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------|----------------------|------------------------|
|               |                                                                                                                                                     | Min.                                           | Typ.                         | Max.                 |                        |
| $V_{io}$      | Input Offset Voltage<br>$T_{min} \leq T_{amb} \leq T_{max.}$                                                                                        |                                                | 0.5                          | 10<br>12             | mV                     |
| $DV_{io}$     | Input Offset Voltage Drift<br>$T_{min} \leq T_{amb} \leq T_{max.}$                                                                                  |                                                | 10                           |                      | $\mu V/^{\circ}C$      |
| $I_{ib}$      | Input Bias Current                                                                                                                                  |                                                | 2                            | 300                  | pA                     |
| $I_{io}$      | Input Offset Current                                                                                                                                |                                                | 2                            | 200                  | pA                     |
| $I_{CC}$      | Supply Current, no load<br>$T_{min} \leq T_{amb} \leq T_{max.}$<br>$V_{CC} = \pm 5V$<br>$V_{CC} = \pm 3V$<br>$V_{CC} = \pm 6V$<br>$V_{CC} = \pm 5V$ |                                                | 23<br>21<br>25               | 30<br>28<br>40<br>32 | mA                     |
| $A_{vd}$      | Large Signal Voltage Gain<br>$V_o = \pm 2.5V$<br>$R_L = \infty$<br>$R_L = 100\Omega$<br>$R_L = 50\Omega$                                            | 800<br>300<br>200                              | 1300<br>850<br>650           |                      | V/V                    |
| $V_{icm}$     | Input Common Mode Voltage Range                                                                                                                     | -5 to +2                                       | -5.5 to +2.5                 |                      | V                      |
| CMR           | Common Mode Rejection Ratio<br>$V_{ic} = V_{icm \text{ min.}}$                                                                                      | 60                                             | 100                          |                      | dB                     |
| SVR           | Supply Voltage Rejection Ratio<br>$V_{CC} = \pm 5V \text{ to } \pm 3V$                                                                              | 50                                             | 70                           |                      | dB                     |
| $V_o$         | Output Voltage<br>$R_L = 100\Omega$<br>$R_L = 50\Omega$<br>$T_{min} \leq T_{amb} \leq T_{max.}$<br>$R_L = 100\Omega$<br>$R_L = 50\Omega$            | $\pm 3$<br>$\pm 2.8$<br>$\pm 2.9$<br>$\pm 2.7$ | +3.5<br>-3.7<br>+3.3<br>-3.5 |                      | V                      |
| $I_o$         | Output Short Circuit Current<br>$V_{id} = \pm 1V$ , $V_o = 0V$                                                                                      | $\pm 50$                                       | $\pm 100$                    |                      | mA                     |
| GBP           | Gain Bandwidth Product<br>$A_{VCL} = 100$ , $R_L = 100\Omega$ , $C_L = 15pF$ , $f = 7.5MHz$                                                         |                                                | 150                          |                      | MHz                    |
| SR            | Slew Rate<br>$V_{in} = \pm 2V$ , $A_{VCL} = 1$ , $R_L = 100\Omega$ , $C_L = 15pF$                                                                   | 100                                            | 200                          |                      | V/ $\mu s$             |
| $e_n$         | Equivalent Input Voltage Noise<br>$R_S = 50\Omega$<br>$f_o = 1kHz$<br>$f_o = 10kHz$<br>$f_o = 100kHz$<br>$f_o = 1MHz$                               |                                                | 20<br>18.2<br>18.1<br>18.2   |                      | $\frac{nV}{\sqrt{Hz}}$ |
| $K_{ov}$      | Overshoot<br>$V_{in} = \pm 2V$ , $A_{VCL} = 1$ , $R_L = 100\Omega$ , $C_L = 15pF$                                                                   |                                                | 10                           |                      | %                      |
| $t_s$         | Settling Time 0.1% - (note 1)<br>$V_{in} = \pm 1V$ , $A_{VCL} = -1$                                                                                 |                                                | 70                           |                      | ns                     |
| $t_r$ , $t_f$ | Rise and Fall Time - (note 1)<br>$V_{in} = \pm 100mV$ , $A_{VCL} = 2$                                                                               |                                                | 5                            |                      | ns                     |
| $t_d$         | Delay Time - (note 1)<br>$V_{in} = \pm 100mV$ , $A_{VCL} = 2$                                                                                       |                                                | 4                            |                      | ns                     |
| $\phi_m$      | Phase Margin<br>$A_{VM} = 1$ , $R_L = 100\Omega$ , $C_L = 15pF$                                                                                     |                                                | 45                           |                      | Degrees                |
| THD           | Total Harmonic Distortion<br>$A_{VCL} = 10$ , $f = 1KHz$ , $V_o = \pm 2.5V$ , no load                                                               |                                                | 0.02                         |                      | %                      |
| FPB           | Full Power Bandwidth - (note 2)<br>$V_o = 5V_{pp}$ , $R_L = 100\Omega$<br>$V_o = 2V_{pp}$ , $R_L = 100\Omega$                                       |                                                | 13<br>32                     |                      | MHz                    |


Note 1 : See test waveform figure

Note 2 : Full power bandwidth =  $\frac{SR}{\pi V_{opp}}$

## TEST WAVEFORM

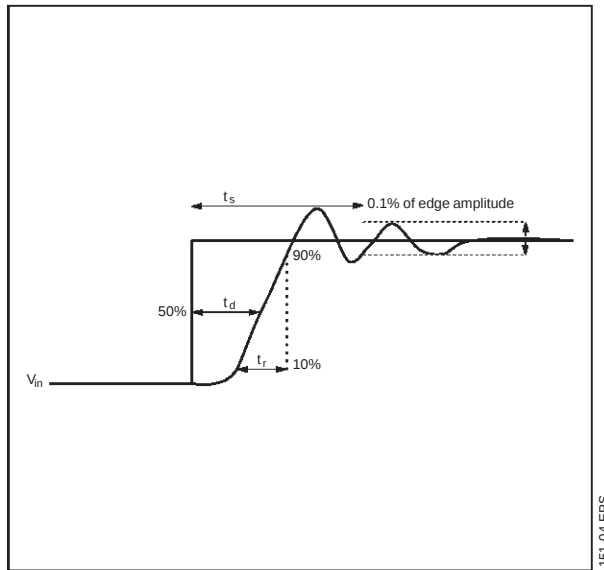

## EVALUATION CIRCUIT

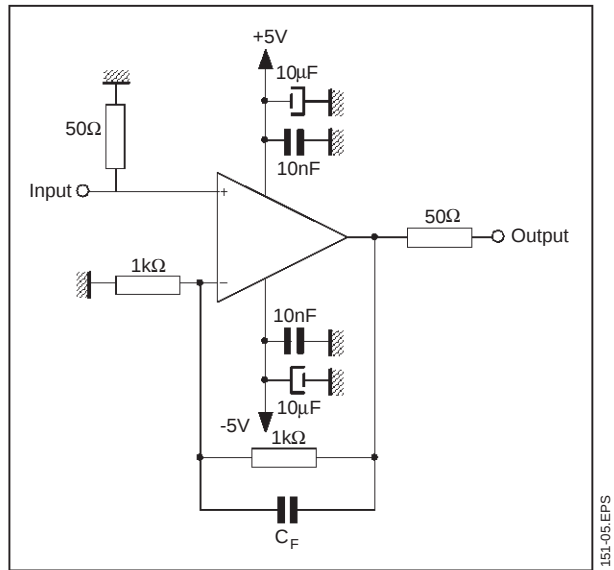

## PRINTED CIRCUIT LAYOUT

As for any high frequency device, a few rules must be observed when designing the PCB to get the best performances from your this speed op amp.

From the most to the least important points :

- Each power supply lead has to be bypassed to ground with a 10nF ceramic capacitor very close to the device and a 10μF tantalum capacitor.
- To provide low inductance and low resistance common return, use a ground plane or common point return for power and signal.
- All leads must be wide and as short as possible especially for op amp inputs. This is in order to decrease parasitic capacitance and

inductance.

- Use small resistor values to decrease time constant with parasitic capacitance.
- Choose component sizes as small as possible (SMD).
- On output, decrease capacitor load so as to avoid circuit stability being degraded which may cause oscillation. One can also add a serial resistor in order to minimise its influence.
- One can add in parallel with feedback resistor a few pF ceramic capacitor  $C_F$  adjusted to optimize the settling time.

**MACROMODEL**

- LOW DISTORTION
- GAIN BANDWIDTH PRODUCT : 150MHz
- UNITY GAIN STABLE
- SLEW RATE : 200V/μs
- VERY FAST SETTLING TIME : 70ns (0.1%)
- VERY HIGH INPUT IMPEDANCE

**Applies to : TSH151C,I**

\*\* Standard Linear Ics Macromodels, 1993.

\*\* CONNECTIONS :

\* 1 INVERTING INPUT

\* 2 NON-INVERTING INPUT

\* 3 OUTPUT

\* 4 POSITIVE POWER SUPPLY

\* 5 NEGATIVE POWER SUPPLY

.SUBCKT TSH151 1 3 2 4 5 (analog)

\*\*\*\*\*

.MODEL MDTH D IS=1E-8 KF=3.322525E-14 CJO=10F

\* INPUT STAGE

RES D1 2 202 150

RES D2 1 201 150

CIP 202 5 10.000000E-12

CIN 201 5 10.000000E-12

EIP 10 5 202 5 1

EIN 16 5 201 5 1

RIP 10 11 2.600000E-01

RIN 15 16 2.600000E-01

RIS 11 15 1.683423E-01

DIP 11 12 MDTH 400E-12

DIN 15 14 MDTH 400E-12

VOFP 12 13 DC 0.000000E+00

VOFN 13 14 DC 0

IPOL 13 5 1.000000E-03

CPS 11 15 8E-09

DINN 17 13 MDTH 400E-12

VIN 17 5 1.500000E+00

DINR 15 18 MDTH 400E-12

VIP 4 18 5.000000E-01

FCP 4 5 VOFP 2.200000E+01

FCN 5 4 VOFN 2.200000E+01

\* AMPLIFYING STAGE

FIP 5 19 VOFP 3.800000E+02

FIN 5 19 VOFN 3.800000E+02

RG1 19 5 1.455096E+03

RG2 19 4 1.455096E+03

CC 19 29 2.000000E-09

HZTP 29 30 VOFP 100

HZTN 30 5 VOFN 100

DOPM 19 22 MDTH 400E-12

DONM 21 19 MDTH 400E-12

HOPM 22 28 VOUT 5.000000E+02

VIPM 28 4 5.000000E+01

HONM 21 27 VOUT 5.000000E+02

VINM 5 27 5.000000E+01

EOUT 26 23 19 5 1

VOUT 23 5 0

ROUT 26 3 9.978126E+00

COUT 3 5 1.000000E-13

DOP 19 25 MDTH 400E-12

VOP 4 25 1.946965E+00

DON 24 19 MDTH 400E-12

VON 24 5 1.946965E+00


.ENDS

**ELECTRICAL CHARACTERISTICS**

$V_{CC} = \pm 5V$ ,  $T_{amb} = 25^{\circ}C$  (unless otherwise specified)


| Symbol       | Conditions                       | Value     | Unit    |
|--------------|----------------------------------|-----------|---------|
| $V_{io}$     |                                  | 0         | mV      |
| $A_{vd}$     | $R_L = 100\Omega$                | 1.18      | V/mV    |
| $I_{CC}$     | No load, per operator            | 23        | mA      |
| $V_{icm}$    |                                  | -5 to 2.5 | V       |
| $V_{OH}$     | $R_L = 100\Omega$                | +3.6      | V       |
| $V_{OL}$     | $R_L = 100\Omega$                | -3.6      | V       |
| $I_{sink}$   | $V_O = 0V$                       | 108       | mA      |
| $I_{source}$ | $V_O = 0V$                       | 108       | mA      |
| GBP          | $R_L = 100\Omega$ , $C_L = 15pF$ | 130       | MHz     |
| SR           | $R_L = 100\Omega$ , $C_L = 15pF$ | 172       | V/μs    |
| $\phi_m$     | $R_L = 100\Omega$ , $C_L = 15pF$ | 25        | Degrees |
| $t_s$        | $A_V = -1$ at 0.1%               | 40        | ns      |

PACKAGE MECHANICAL DATA  
8 PINS - PLASTIC DIP

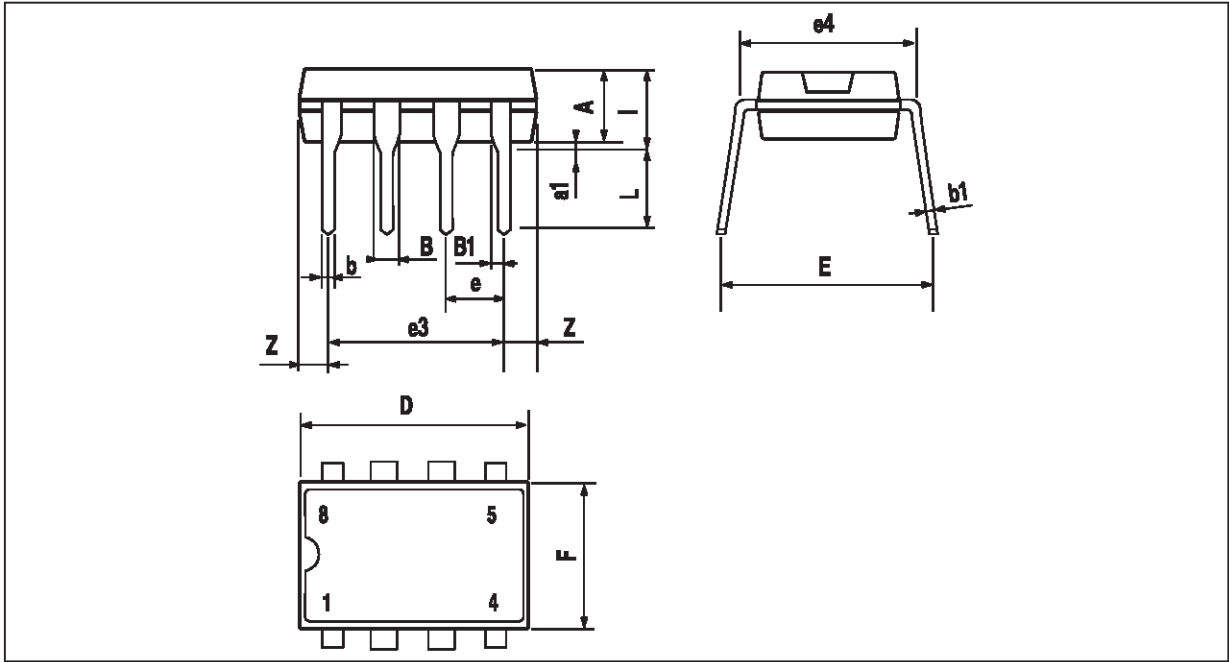

| Dimensions | Millimeters |      |       | Inches |       |       |
|------------|-------------|------|-------|--------|-------|-------|
|            | Min.        | Typ. | Max.  | Min.   | Typ.  | Max.  |
| A          |             | 3.32 |       |        | 0.131 |       |
| a1         | 0.51        |      |       | 0.020  |       |       |
| B          | 1.15        |      | 1.65  | 0.045  |       | 0.065 |
| b          | 0.356       |      | 0.55  | 0.014  |       | 0.022 |
| b1         | 0.204       |      | 0.304 | 0.008  |       | 0.012 |
| D          |             |      | 10.92 |        |       | 0.430 |
| E          | 7.95        |      | 9.75  | 0.313  |       | 0.384 |
| e          |             | 2.54 |       |        | 0.100 |       |
| e3         |             | 7.62 |       |        | 0.300 |       |
| e4         |             | 7.62 |       |        | 0.300 |       |
| F          |             |      | 6.6   |        |       | 0.260 |
| i          |             |      | 5.08  |        |       | 0.200 |
| L          | 3.18        |      | 3.81  | 0.125  |       | 0.150 |
| Z          |             |      | 1.52  |        |       | 0.060 |

PACKAGE MECHANICAL DATA  
8 PINS - PLASTIC MICROPACKAGE (SO)

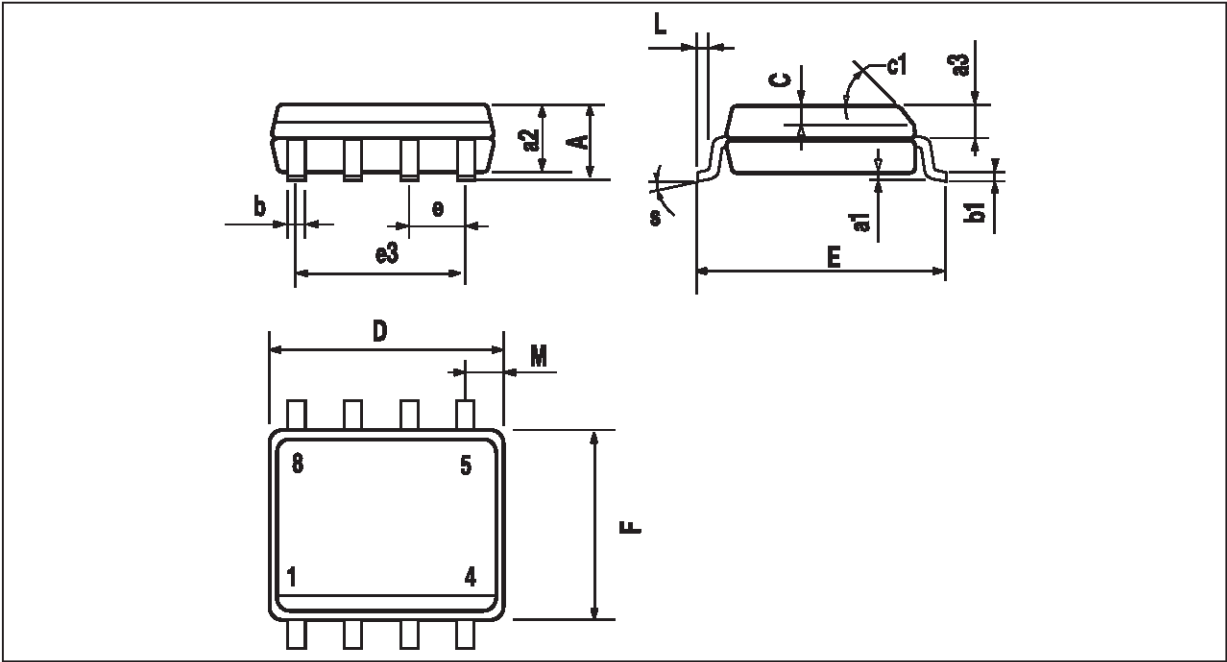

| Dimensions | Millimeters |      |      | Inches |       |       |
|------------|-------------|------|------|--------|-------|-------|
|            | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A          |             |      | 1.75 |        |       | 0.069 |
| a1         | 0.1         |      | 0.25 | 0.004  |       | 0.010 |
| a2         |             |      | 1.65 |        |       | 0.065 |
| a3         | 0.65        |      | 0.85 | 0.026  |       | 0.033 |
| b          | 0.35        |      | 0.48 | 0.014  |       | 0.019 |
| b1         | 0.19        |      | 0.25 | 0.007  |       | 0.010 |
| C          | 0.25        |      | 0.5  | 0.010  |       | 0.020 |
| c1         | 45° (typ.)  |      |      |        |       |       |
| D          | 4.8         |      | 5.0  | 0.189  |       | 0.197 |
| E          | 5.8         |      | 6.2  | 0.228  |       | 0.244 |
| e          |             | 1.27 |      |        | 0.050 |       |
| e3         |             | 3.81 |      |        | 0.150 |       |
| F          | 3.8         |      | 4.0  | 0.150  |       | 0.157 |
| L          | 0.4         |      | 1.27 | 0.016  |       | 0.050 |
| M          |             |      | 0.6  |        |       | 0.024 |
| S          | 8° (max.)   |      |      |        |       |       |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a trademark of STMicroelectronics

© 1998 STMicroelectronics – Printed in Italy – All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES  
Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco  
The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

