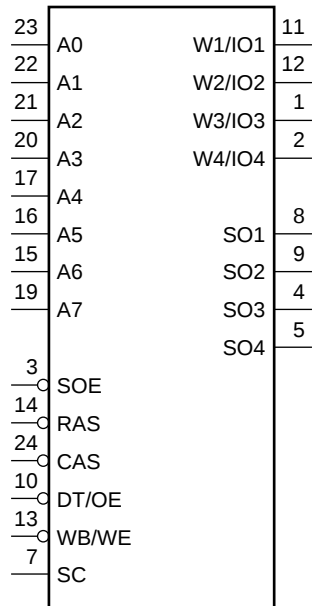
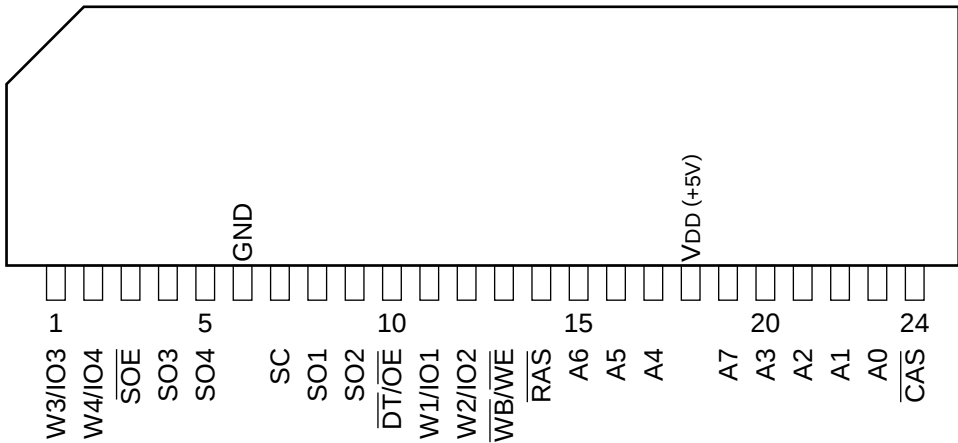

C-MOS DUALPORT GRAPHIC BUFFER
-SIDE VIEW-



INPUT
A0-A7 ; ADDRESS
CAS ; COLUMN ADDRESS STROBE
DT ; DATA TRANSFER CONTROL
OE ; OUTPUT ENABLE
RAS ; ROW ADDRESS STROBE
SC ; SERIAL CONTROL CLOCK
SOE ; SERIAL OUTPUT ENABLE
W1-W4 ; WRITE PAR BIT SELECT DATA
WB ; WRITE PAR BIT CONTROL
WE ; WRITE ENABLE

OUTPUT
SO1-SO4 ; SERIAL DATA

INPUT/OUTPUT
IO1-IO4 ; DATA

