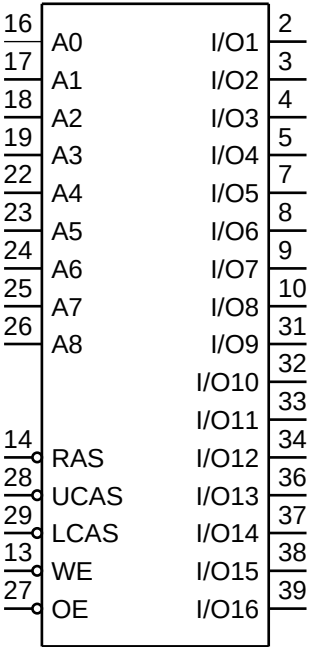
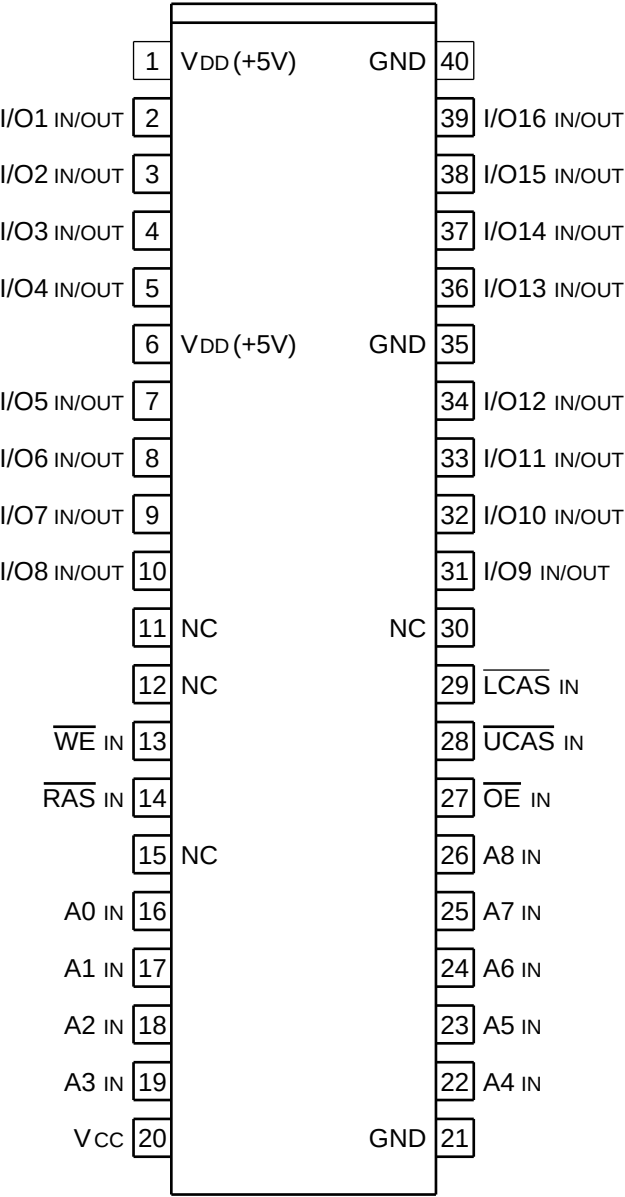

C-MOS 4M (262,144x16) BIT DYNAMIC RAM
- TOP VIEW -



- A0-8 ; ADDRESS INPUTS
I/O1-16 ; DATA INPUTS/OUTPUTS
RAS ; ROW ADDRESS STROBE INPUT
UCAS ; COLUMN ADDRESS STROBE (UPPER) INPUT
LCAS ; COLUMN ADDRESS STROBE (LOWER) INPUT
WE ; WRITE ENABLE INPUT
OE ; OUTPUT ENABLE INPUT

