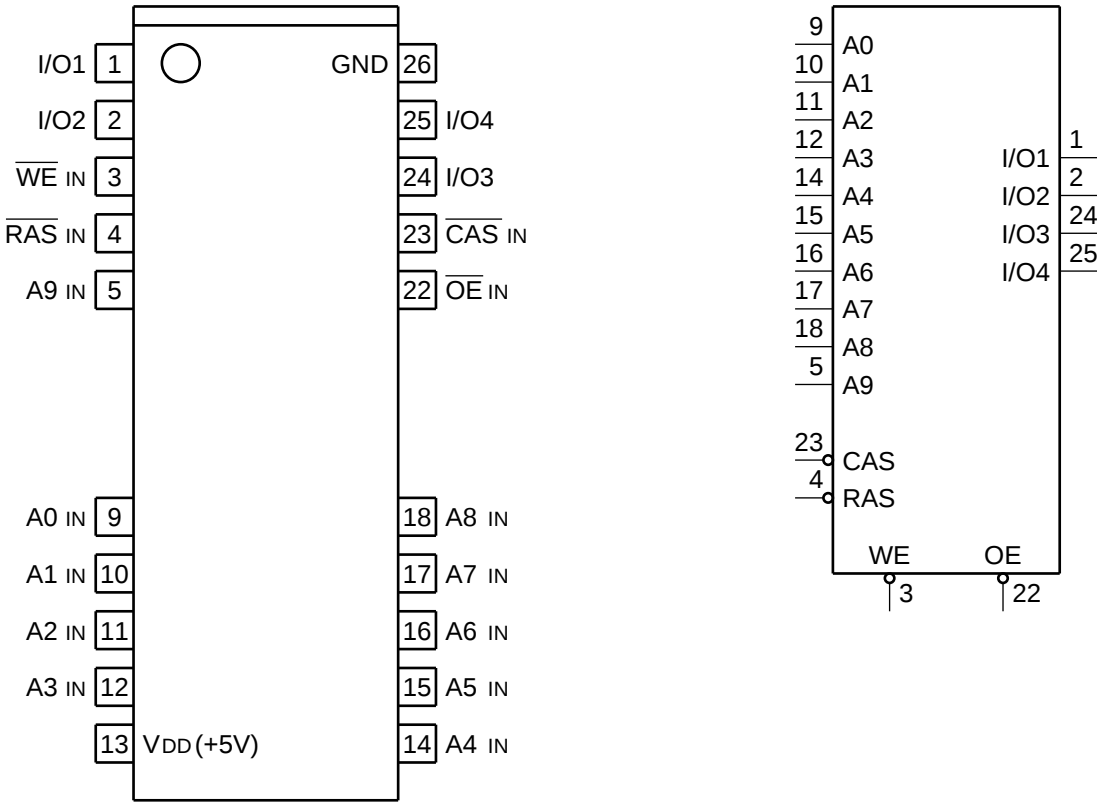

C-MOS 4M (1,048,576WORDx4)-BIT DYNAMIC RAM
- TOP VIEW -



- A0-A9 ; ADDRESS INPUTS
- CAS ; COLUMN ADDRESS STROBE INPUT
- I/O1-I/O4 ; DATA INPUTS/OUTPUTS
- OE ; OUTPUT ENABLE INPUT
- RAS ; ROW ADDRESS STROBE INPUT
- WE ; WRITE ENABLE INPUT

