
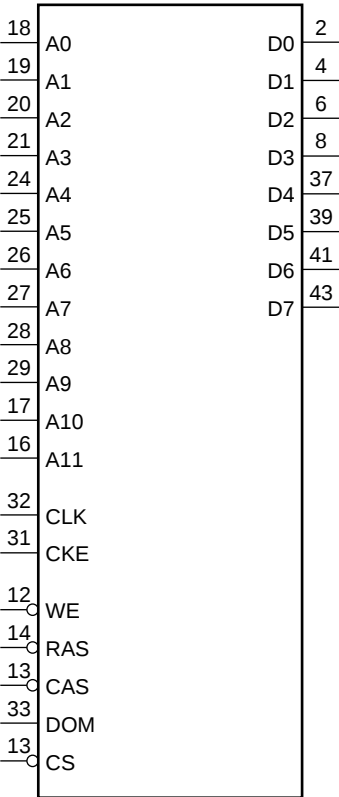


C-MOS 16 M (1 M WORD × 8-BIT × 2) -BIT DRAM
—TOP VIEW—

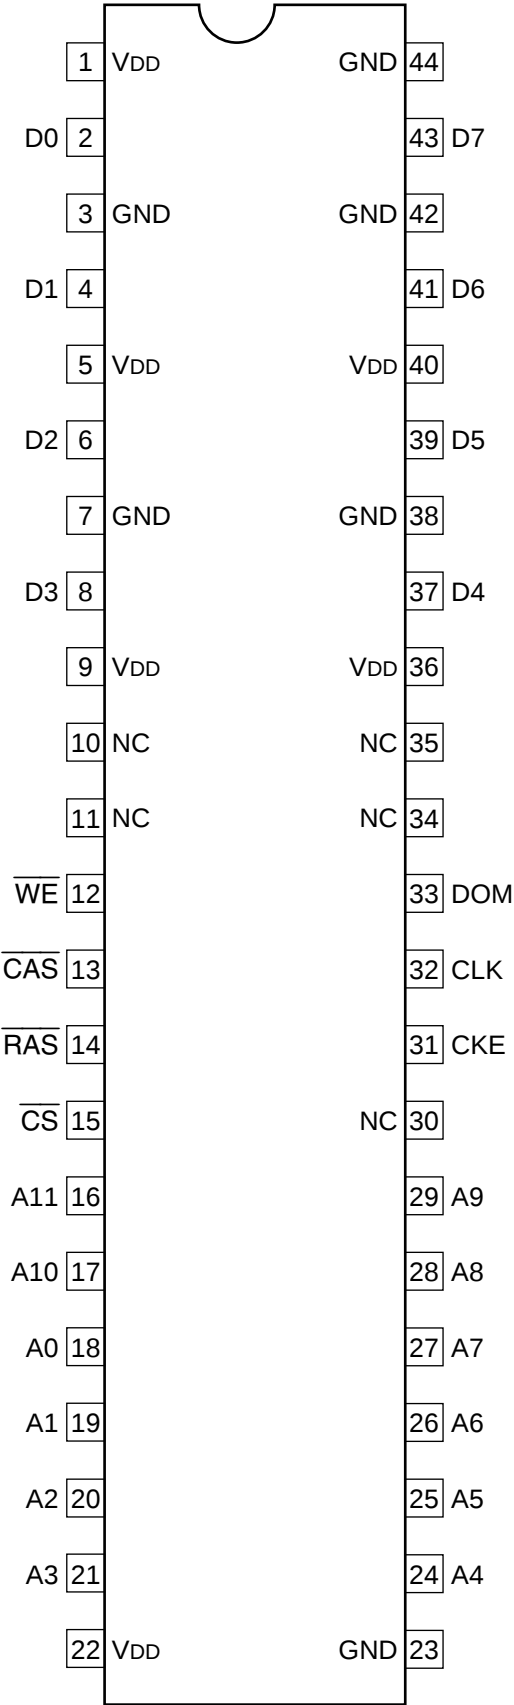

INPUT
A0 - A11 : ADDRESS
CAS : COLUMN ADDRESS STROBE
CKE : CLOCK ENABLE
CLK : SYSTEM CLOCK
CS : CHIP SELECT
DOM : DATA I/O MASK ENABLE
RAS : ROW ADDRESS STROBE
WE : WRITE ENABLE

I/O
D0 - D7 : DATA