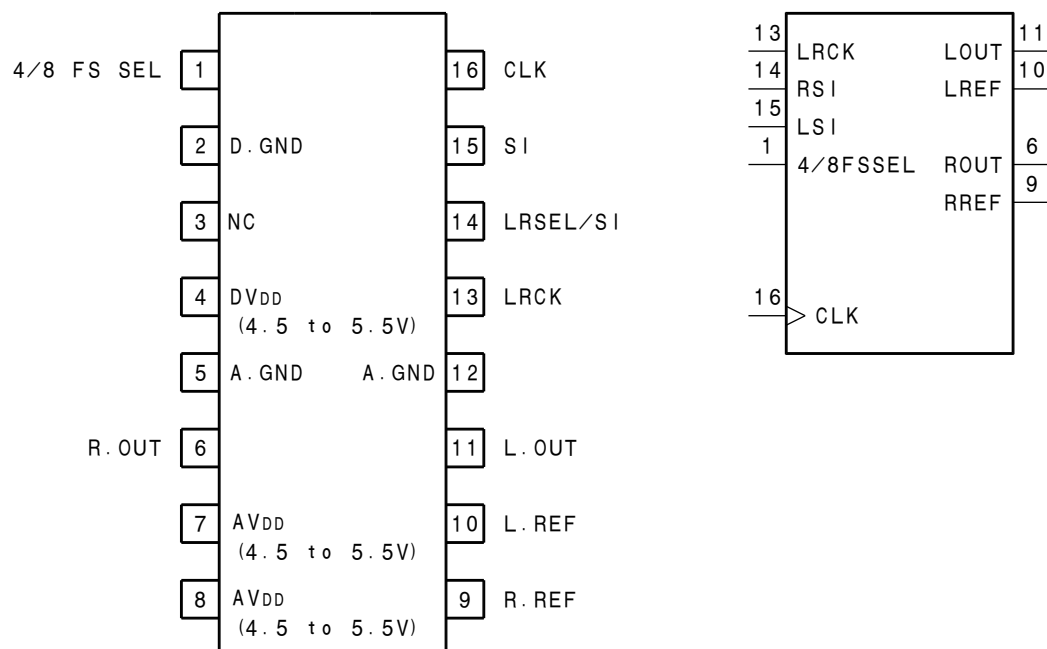

C-MOS 16BIT D/A CONVERTER FOR AUDIO

-TOP VIEW-



INPUT

4/8FS SEL ; "LOW" or "OPEN" ; LCH AND RCH SERIAL DATA INPUT FROM 15PIN

; "HIGH" ; LCH SERIAL DATA INPUT FROM 15PIN

RCH SERIAL DATA INPUT FROM 14PIN

LRCK/WDCK ; LEFT/RIGHT CLOCK (4/8FS SEL; "LOW" or "OPEN")

; WORD CLOCK (4/8FS SEL; "HIGH")

LRSEL/RSI ; LEFT/RIGHT SELECTION (4/8FS SEL; "LOW" or "OPEN")

; R-CH SERIAL DATA INPUT (4/8FS SEL; "HIGH")

SI/LSI ; LCH AND RCH SERIAL DATA INPUT (4/8FS SEL; "LOW" or "OPEN")

; LCH SERIAL DATA INPUT (4/8FS SEL; "HIGH")

CLK ; CLOCK

OUTPUT

R. OUT ; R-CH OUTPUT

R. REF ; R-CH VOLTAGE REFERENCE

L. REF ; L-CH VOLTAGE REFERENCE

L. OUT ; L-CH OUTPUT

