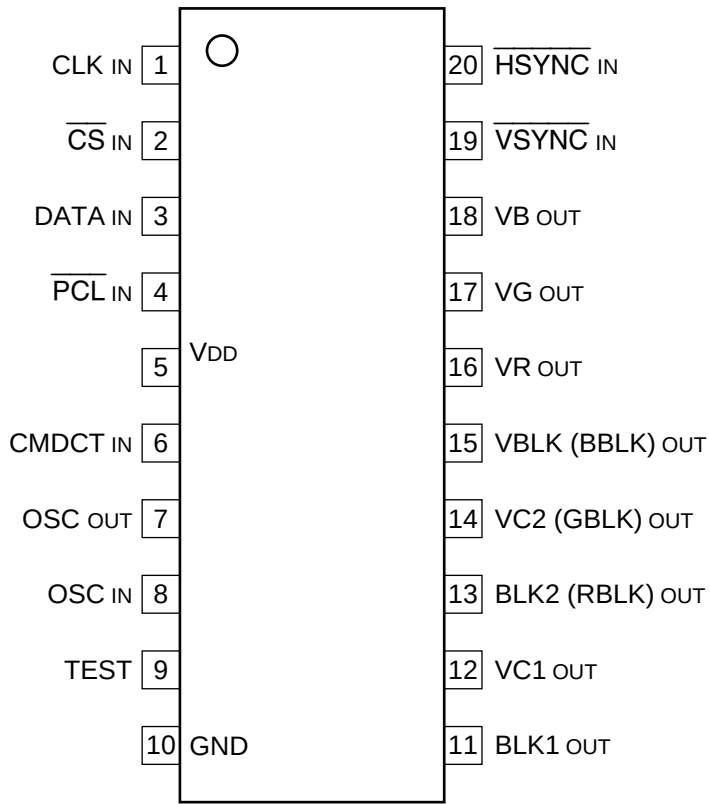


C-MOS ON-SCREEN CHARACTER DISPLAY

—TOP VIEW—

**INPUT**

CLK	: CLOCK
$\overline{CS}$	: CHIP SELECT
CMDCT	: COMMAND SELECT
DATA	: SERIAL DATA
$\overline{HSYNC}$	: HORIZONTAL SYNC
OSC	: OSCILLATOR
$\overline{PCL}$	: POWER ON CLEAR
$\overline{VSYNC}$	: VERTICAL SYNC

OUTPUT

BLK1, BLK2	: BLANKING 1, 2
BBLK	: BLANKING B
OSC	: OSCILLATOR
GBLK	: BLANKING G
RBLK	: BLANKING R
VBLK	: BLANKING
VC1, VC2	: CHARACTER 1, 2
VR, VG, VB	: CHARACTER R, G, B

OTHER

TEST	: TEST
------	--------

* IN () ARE SET BY SETTING WITH INITIAL CONDITION SETTING COMMAND.

