

Ignition Controller

Description


The CS290/291 are integrated circuits to be used in the automotive ignition system. The application diagram shown below highlights the CS290. The CS291 is identical with the differential input replaced

by a single-ended input. The part is capable of withstanding 90V load dump transients in the circuit shown below. The part is also reverse battery protected.

Absolute Maximum Ratings

Power supply voltage, V_{BAT} -0.3V to 22V
 Peak Transient Voltage (Load Dump 76V @ 14V V_{BAT}) 90V
 Storage Temperature -55°C to 165°C
 Operating Junction Temperature, T_J 150°C
 Lead Temperature Soldering
 Wave Solder (through hole styles only) 10 sec. max, 260°C peak
 Reflow (SMD styles only) 60 sec. max above 183°C, 230°C peak

Application Diagram

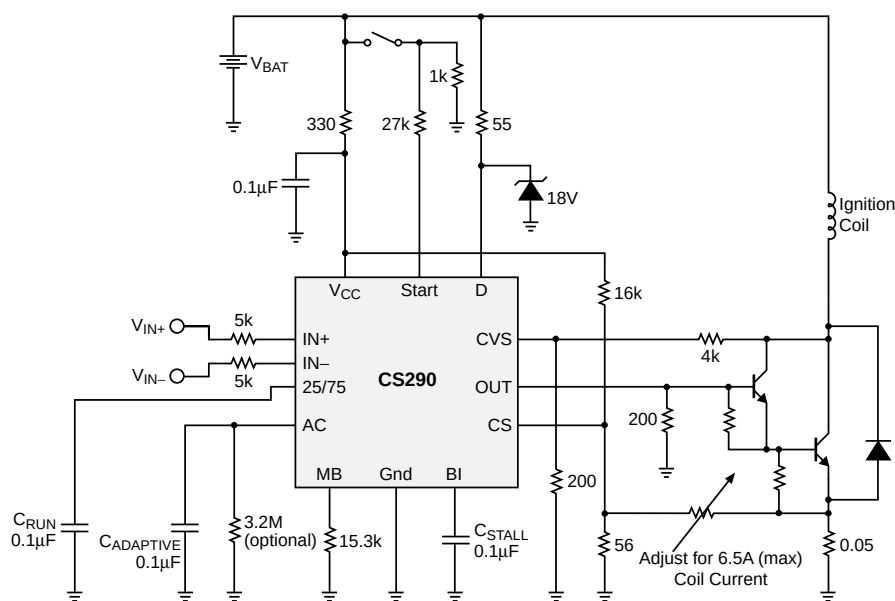


Features


- 40mA Driver
- Stall Timing
- Output Current Control
- Output Clamp
- Overvoltage Shutdown

Package Options

14 Lead PDIP



16 Lead SO Wide

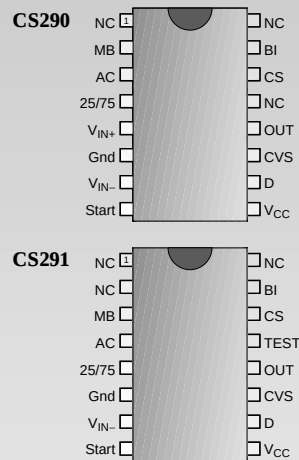

Consult Factory for Flip Chip



ON Semiconductor

June, 1999 - Rev. 3

ON Semiconductor
 2000 South County Trail, East Greenwich, RI 02818
 Tel: (401)885-3600 Fax: (401)885-5786
 N. American Technical Support: 800-282-9855
 Web Site: www.cherry-semi.com

Electrical Characteristics: $6V < V_B < 16V$, $-40^{\circ}C < T_A < 125^{\circ}C$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
■ Input					
Positive Threshold				66	% V_{BAT}
Negative Threshold	$V_{BAT} = 16V$ $V_{BAT} = 6V$	29 29			% V_{BAT}
Hysteresis		9			% V_{BAT}
Input Impedance	Input = 100 μA	70		325	k Ω
V_{CC} Negative Edge Filter	$V_{BAT} = 16V$ $V_{BAT} = 6V$	18 4		1100 1100	μs
■ Output Stage					
Negative Edge Delay (Start Mode)	$V_{BAT} = 6V$	1.1		3.1	ms
Positive Edge Delay (Start Mode)	$V_{BAT} = 5V$	1.06		1.80	ms
Delay Time (Start High to Output Low)	$V_{BAT} = 14V$	0		16	μs
Output Current	$V_{BAT} = 6V$	40		65	mA
Output SOA	$V_{BAT} = 22V$	40		65	mA
Output Leakage	$V_{BAT} = 18V$	0		100	μA
Output Clamp Voltage	Output = 10mA	13.7		17	V
Output Clamp Impedance (Refers to Collector Sense Voltage pin)	Output = 10mA	10		80	Ω
High Frequency On Time	$V_{BAT} = 14V$	70		80	%
■ General					
I_{CC}	$V_{BAT} = 6V$ $V_{BAT} = 16V$	1.4 5		4.6 19	mA
AC Gain Adaptive Cap Gain	$V_{BAT} = 14V$	0.8		1.2	V/V
V_{CS} Regulation	$V_{BAT} = 6V$	140		210	mV
High Voltage Shutdown		24.3		31	V
■ Stall					
V_{STALL} Soft Shutdown Voltage	$V_{CS} = 6V$	0		11	mV
Soft Shutdown Frequency	$V_{BAT} = 14V$	1.0		2.6	Hz
Soft Shutdown Time	$V_{BAT} = 6V$	13.1		27	ms
Stall to Spark Output Delay	$V_{BAT} = 14V$	4.5		8.9	ms
Battery Interrupt Time	$V_{BAT} = 14V$	25		750	ms
Battery Interrupt Recovery Time	(200 Hz)	0		800	ms
■ Dwell					
Dwell @ 10Hz (Start Mode)	$V_{BAT} = 5V$	46		54	%
Start to Output Disable Time	$V_{BAT} = 14V$	65		135	ms
Excess Dwell @ 20Hz (Run Mode)	$V_{BAT} = 14V$	14		20.8	%


Electrical Characteristics: $6V < V_B < 16V$, $-40^{\circ}C < T_A < 125^{\circ}C$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
■ Dwell: continued					
Excess Dwell @ 200Hz (Run Mode)	$V_{BAT} = 14V$	14		20.8	%
Reduced Dwell Threshold		16.6		21.0	V
Reduced Dwell Hysteresis		200		800	mV
Reduced Dwell	$V_{BAT} = 20V$	4.0		6.0	%

Package Pin Description

PACKAGE PIN #			PIN SYMBOL	FUNCTION
14 lead PDIP	16 lead SO wide CS290	CS291		
1	6	6	Gnd	Signal Ground.
2	2	3	MB	Master Bias. Sets up operating currents on the IC with external resistor.
3	3	4	AC	Adaptive Capacitor. Follows the 25/75 capacitor. Voltage trip points control the Output for setting dwell.
4	4	5	25/75	Run Capacitor. Provides 25%/75% charge and discharge current to an external capacitor for setting dwell.
5	5	NC	V _{IN+}	Input pin +.
6	7	7	V _{IN-}	Input pin –.
7	8	8	Start	Input pin to put device in the “start mode”.
8	9	9	V _{CC}	Supply input voltage.
9	10	10	D	Supply current to output pin.
10	11	11	CVS	Collector Voltage Sense. Input for flyback detect.
11	12	12	OUT	Output. Driver for external darlington.
12	1,13,16	1,2,16	NC	No connection.
13	14	14	CS	Current Sense. Feedback for max coil current.
14	15	15	BI	Battery Int. Input for “stall mode” of operation
NC	NC	13	Test	Factory test pin. Pin should be grounded in customer application.

Typical Performance Characteristics

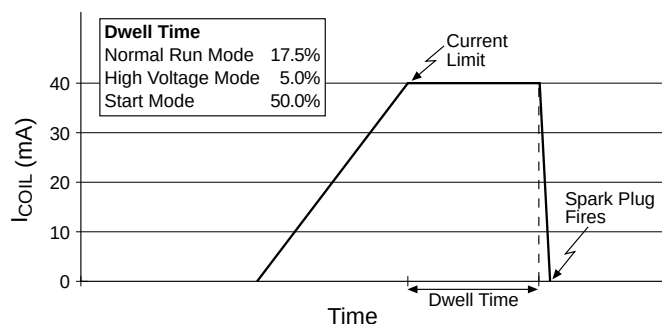Timing Diagram, I_{COIL} vs. Time

Package Specification


PACKAGE DIMENSIONS IN mm (INCHES)

Lead Count	D			
	Metric		English	
	Max	Min	Max	Min
14 Lead PDIP	19.69	18.67	.775	.735
16 Lead SO Wide	10.50	10.10	.413	.398


PACKAGE THERMAL DATA

Thermal Data		14 Lead PDIP	16 Lead SO Wide	
$R\theta_{JC}$	typ	48	23	°C / W
$R\theta_{JA}$	typ	85	105	°C / W

Plastic DIP (N); 300 mil wide

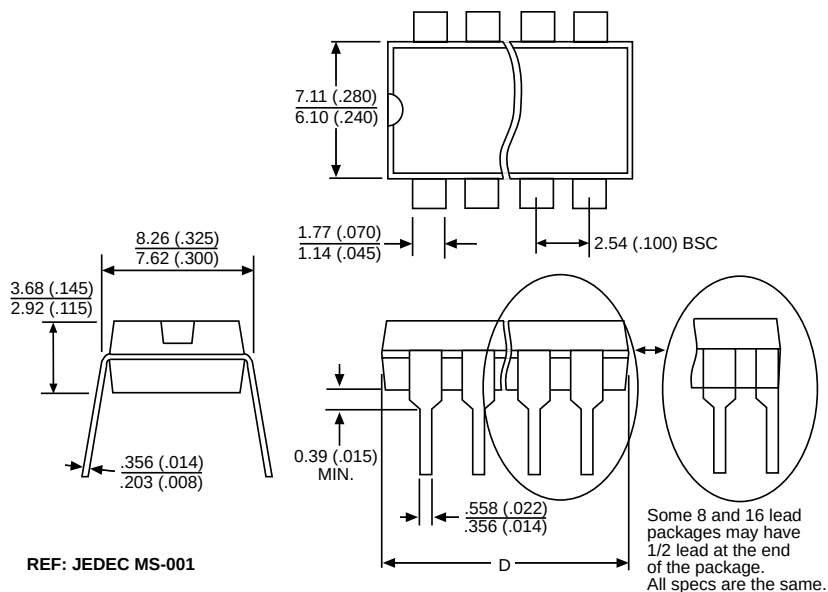

Surface Mount Wide Body (DW); 300 mil wide

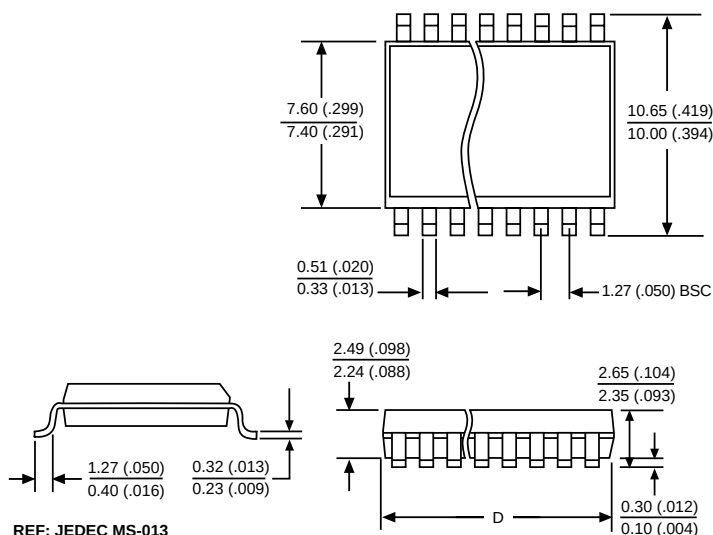

Ordering Information

Part Number	Description
CS290YN14	14 Lead PDIP
CS291YN14	14 Lead PDIP
CS290YDW16	16 Lead SO Wide
CS290YDWR16	16 Lead SO Wide (tape & reel)
CS291YDW16	16 Lead SO Wide
CS291YDWR16	16 Lead SO Wide (tape & reel)

ON Semiconductor and the ON Logo are trademarks of Semiconductor Components Industries, LLC (SCILLC). ON Semiconductor reserves the right to make changes without further notice to any products herein. For additional information and the latest available information, please contact your local ON Semiconductor representative.