

1.5A, 260kHz and 520kHz, Low Voltage Buck Regulators with External Bias or Synchronization Capability

Description

The CS5141X products are 1.5A buck regulator ICs. These devices are fixed-frequency operating at 260kHz and 520kHz. The regulators use the V²TM control architecture to provide unmatched transient response, the best overall regulation and the simplest loop compensation for today's high-speed logic. These products accommodate input voltages from 4.5V to 40V.

The CS51411 and CS51413 contain synchronization circuitry. The CS51412 and CS51414 have the option of powering the controller from an external 3.3V to 6V supply in order to improve


efficiency, especially in high input voltage, light load conditions.

The on-chip NPN transistor is capable of providing a minimum of 1.5A of output current, and is biased by an external "boost" capacitor to ensure saturation, thus minimizing on-chip power dissipation. Protection circuitry includes thermal shutdown, cycle-by-cycle current limiting and frequency foldback. The CS51411 and CS51413 are functionally pin-compatible with the LT1375. The CS51412 and CS51414 are functionally pin-compatible with the LT1376.

Product Selection Guide

Part Number	Frequency	Temperature Range	Bias/Sync
CS51411E	260kHz	-40°C to 85°C	Sync
CS51411G	260kHz	0°C to 70°C	Sync
CS51412E	260kHz	-40°C to 85°C	Bias
CS51412G	260kHz	0°C to 70°C	Bias
CS51413E	520kHz	-40°C to 85°C	Sync
CS51413G	520kHz	0°C to 70°C	Sync
CS51414E	520kHz	-40°C to 85°C	Bias
CS51414G	520kHz	0°C to 70°C	Bias

Application Diagram

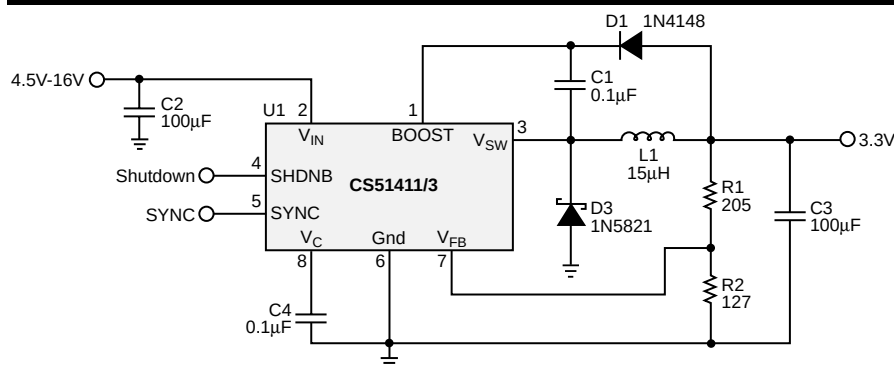

4.5V-16V to 3.3V @ 1A Converter

V²TM is a trademark of Switch Power, Inc.


Features

- V²TM Architecture Provides Ultra-Fast Transient Response, Improved Regulation and Simplified Design
- 2% Error Amp Reference Voltage Tolerance
- Switch Frequency Decrease of 4:1 in Short Circuit Conditions Reduces Short Circuit Power Dissipation
- BOOST Lead Allows "Bootstrapped" Operation to Maximize Efficiency
- Sync Function for Parallel Supply Operation or Noise Minimization
- Shutdown Lead Provides Power-Down Option
- 85µA Quiescent Current During Power-Down
- Thermal Shutdown
- Soft Start
- Pin-Compatible with LT1375 and LT1376


Package Option

8L Narrow SOIC

CS51411/3



CS51412/4



ON Semiconductor

2000 South County Trail, East Greenwich, RI 02818

Tel: (401)885-3600 Fax: (401)885-5786

N. American Technical Support: 800-282-9855

Web Site: www.onsemi.com



ON Semiconductor

Absolute Maximum Ratings

Pin Name	V _{MAX}	V _{MIN}	I _{SOURCE}	I _{SINK}
V _{IN}	40V	-0.3V	N / A	4A
BOOST	40V	-0.3V	N / A	100mA
V _{SW}	40V	-0.6V / -1V, t < 50ns	4A	10mA
V _C	7V	-0.3V	1mA	1mA
SHDNB	7V	-0.3V	1mA	1mA
SYNC	7V	-0.3V	1mA	1mA
BIAS	7V	-0.3V	1mA	50mA
V _{FB}	7V	-0.3V	1mA	1mA
Gnd	7V	-0.3V	50mA	1mA

Operating Junction Temperature Range-40°C to +150°C

Storage Temperature Range-65°C to +150°C

Lead Temperature Soldering; Reflow60 second max above 183°C, 230°C peak

ESD Damage Threshold (Human Body Model)2kV

**Electrical Characteristics: -40°C < T_J < 125°C (CS51411E/2E/3E/4E); -40°C < T_A < 85°C (CS51411E/2E/3E/4E);
0°C < T_A < 70°C (CS51411G/2G/3G/4G), 4.5V < V_{IN} < 40V; Unless otherwise specified.**

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
■ Oscillator					
Operating Frequency	CS51411 / CS51412	224	260	296	kHz
Operating Frequency	CS51413 / CS51414	446	520	594	kHz
Frequency Line Regulation			0.05	0.15	% / V
Maximum Duty Cycle		85	90	95	%
V _{FB} Frequency Foldback Threshold		0.29	0.32	0.36	V
■ PWM Comparator					
Slope Compensation Voltage	CS51411 / CS51412 Fix V _{FB} , ΔV _C / ΔT _{ON}	8	17	26	mV / μs
	CS51413 / CS51414	25	50	75	mV / μs
Minimum Output Pulse Width	CS51411 / CS51412, V _{FB} to V _{SW}		150	300	ns
	CS51413 / CS51414, V _{FB} to V _{SW}			230	ns
■ Power Switch					
Current Limit	V _{FB} > 0.36V	1.6	2.3	3.0	A
Foldback Current	V _{FB} < 0.29V	0.9	1.5	2.1	A
Saturation Voltage	I _{OUT} = 1.5A, V _{BOOST} = V _{IN} + 2.5V	0.4	0.7	1.0	V
Current Limit Delay	Note 1		120	160	ns
■ Error Amplifier					
Internal Reference Voltage		1.244	1.270	1.296	V
Reference PSRR	Note 1		40		dB
FB Input Bias Current			0.02	0.1	μA
Output Source Current	V _C = 1.270V, V _{FB} = 1V	15	25	35	μA
Output Sink Current	V _C = 1.270V, V _{FB} = 2V	15	25	35	μA
Output High Voltage	V _{FB} = 1V	1.39	1.46	1.53	V
Output Low Voltage	V _{FB} = 2V	5	20	60	mV
Unity Gain Bandwidth	Note 1		500		kHz
Open Loop Amplifier Gain	Note 1		70		dB
Amplifier Transconductance	Note 1		6.4		mA / V

Electrical Characteristics: $-40^{\circ}\text{C} < T_J < 125^{\circ}\text{C}$ (CS51411E/2E/3E/4E); $-40^{\circ}\text{C} < T_A < 85^{\circ}\text{C}$ (CS51411E/2E/3E/4E);
 $0^{\circ}\text{C} < T_A < 70^{\circ}\text{C}$ (CS51411G/2G/3G/4G), $4.5\text{V} < V_{\text{IN}} < 40\text{V}$; Unless otherwise specified.


PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
■ Sync					
Sync Frequency Range	CS51411 / 12	305		470	kHz
Sync Frequency Range	CS51413 / 14	575		880	kHz
Sync Pin Bias Current	$V_{\text{SYNC}} = 0\text{V}$		0.1	0.2	μA
	$V_{\text{SYNC}} = 5\text{V}$	250	360	460	μA
Sync Threshold Voltage		1.0	1.5	1.9	V
■ Shutdown					
Shutdown Threshold Voltage		1.0	1.3	1.6	V
Shutdown Pin Bias Current	$V_{\text{SHDNB}} = 0\text{V}$	0.14	5.00	35	μA
■ Thermal Shutdown					
Over Temperature Trip Point	Note 1	175	185	195	$^{\circ}\text{C}$
Thermal Shutdown Hysteresis	Note 1		42		$^{\circ}\text{C}$
■ General					
Quiescent Current	$I_{\text{SW}} = 0\text{A}$	3.0	4.0	6.25	mA
Shutdown Quiescent Current	$V_{\text{SHDNB}} = 0\text{V}$	8	20	85	μA
Boost Operating Current	$V_{\text{BOOST}} - V_{\text{SW}} = 2.5\text{V}$	6	15	40	mA / A
Minimum Boost Voltage	Note 1			2.5	V
Start up Voltage		2.2	3.3	4.4	V
Minimum Output Current			7	12	mA

Note 1: Guaranteed by design, not 100% tested in production.

Package Pin Description

PACKAGE PIN #	PIN SYMBOL	FUNCTION
1	BOOST	The BOOST pin provides additional drive voltage to the on-chip NPN power transistor. The resulting decrease in switch on voltage increases efficiency.
2	V_{IN}	This pin is the main power input to the IC.
3	V_{SW}	This is the connection to the emitter of the on-chip NPN power transistor and serves as the switch output to the inductor. This pin may be subjected to negative voltages during switch off-time. A catch diode is required to clamp the pin voltage in normal operation. This node can stand $-1.0V$ for less than 50ns during switch node flyback.
4 (CS51412 / 14)	BIAS	The BIAS pin connects to the on-chip power rail and allows the IC to run most of its internal circuitry from the regulated output or another low voltage supply to improve efficiency. The BIAS pin is left floating if this feature is not used.
5 (CS51411 / 13)	SYNC	This pin provides the synchronization input.
5 (CS51412 / 14) 4 (CS51411 / 13)	SHDNB	The shutdown pin is active low and TTL compatible. The IC goes into sleep mode, drawing less than 85 μA when the pin voltage is pulled below 1V. This pin should be left floating in normal operation.
6	Gnd	Power return connection for the IC.
7	V_{FB}	The FB pin provides input to the inverting input of the error amplifier. If V_{FB} is lower than 0.29V, the oscillator frequency is divided by four, and current limit folds back to about 1 ampere. These features protect the IC under severe overcurrent or short circuit conditions.
8	V_C	The V_C pin provides a connection point to the output of the error amplifier and input to the PWM comparator. Driving of this pin should be avoided because on-chip test circuitry becomes active whenever current exceeding 0.5mA is forced into the IC.

Block Diagram

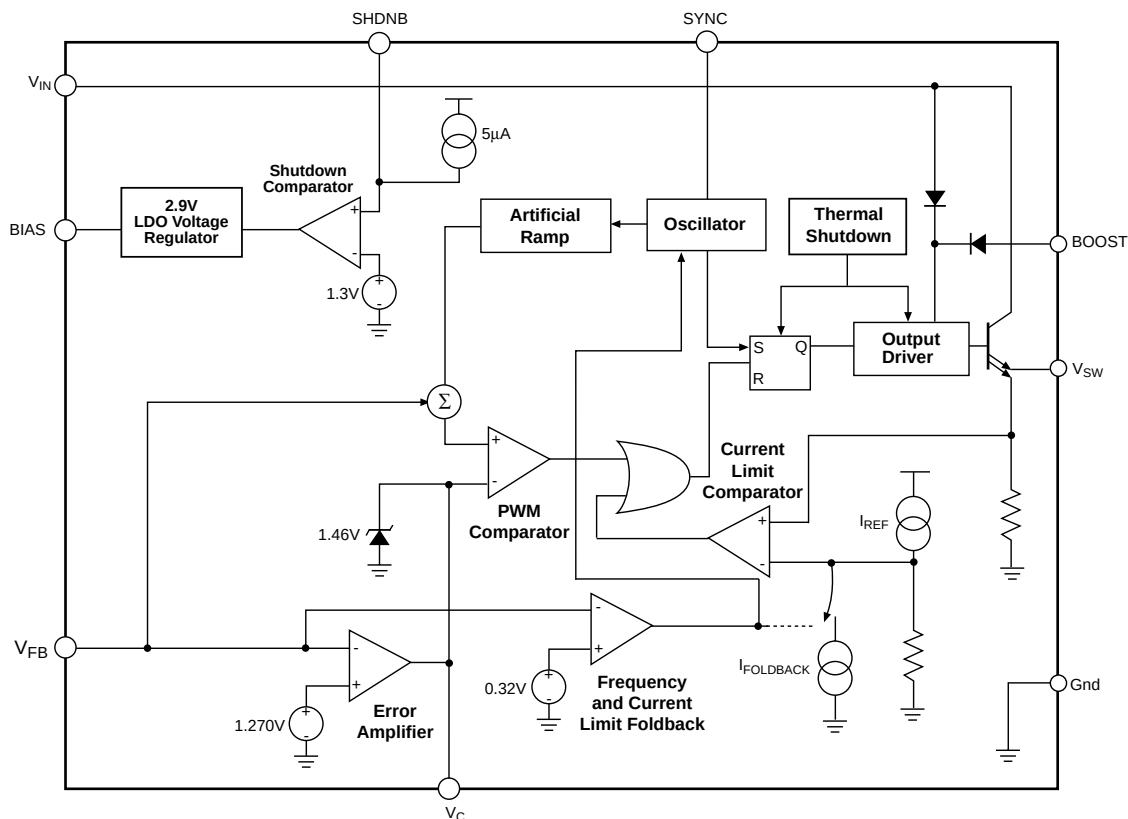

Theory Of Operation

V²™ Control

The CS5141X family of buck regulators provides leading edge technology, a high level of integration and high operating frequencies allowing the layout of a switch-mode power supply in a very small board area. These devices are based on the proprietary V²™ control architecture. V²™ control uses the output voltage and its ripple as the ramp signal, providing an ease of use not generally associated with voltage or current mode control. Improved line regulation, load regulation and very fast transient response are also major advantages.

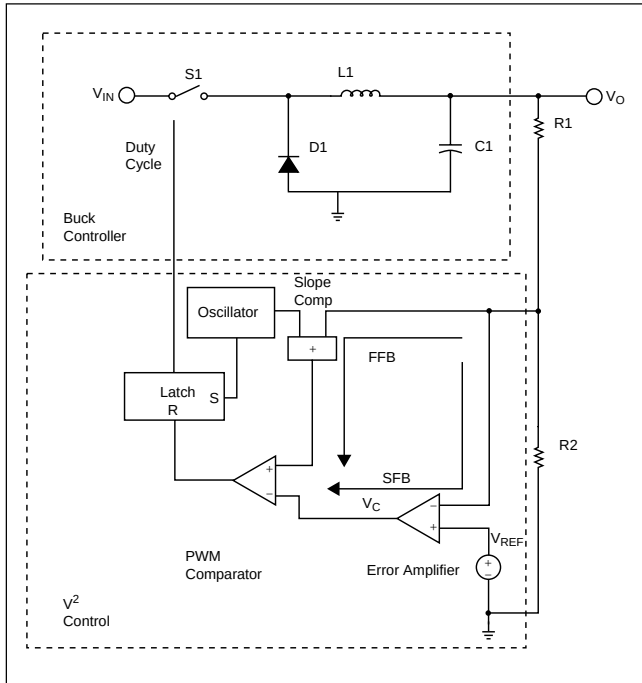


Figure 1: Buck converter with V²™ control.

As shown in Figure 1, there are two voltage feedback paths in V²™ control, namely FFB(Fast Feedback) and SFB(Slow Feedback). In FFB path, the feedback voltage connects directly to the PWM comparator. This feedback path carries the ramp signal as well as the output DC voltage. Artificial ramp derived from oscillator is added to the feedback signal to improve stability. The other feedback path SFB connects the feedback voltage to the error amplifier whose output V_C feeds to the other input of the PWM comparator. In a constant frequency mode, the oscillator signal sets the output latch and turns on the switch S1. This starts a new switch cycle. The ramp signal, composed of both artificial ramp and output ripple, eventually comes across the V_C voltage, and consequently resets the latch to turn off the switch. The switch S1 will turn on again at the beginning of the next switch cycle. In a buck converter, the output ripple is determined by the ripple current of the inductor L1 and the ESR (equivalent series resistor) of the output capacitor C1.

The slope compensation signal is a fixed voltage ramp provided by the oscillator. Adding this signal eliminates sub-harmonic oscillation associated with the operation at duty

cycle greater than 50%. The artificial ramp also ensures the proper PWM function when the output ripple voltage is inadequate. The slope compensation signal is properly sized to serve its purposes without sacrificing the transient response speed.

Under load and line transient, not only the ramp signal changes, but more significantly the DC component of the feedback voltage varies proportionally to the output voltage. FFB path connects both signals directly to the PWM comparator. This allows instant modulation of the duty cycle to counteract any output voltage deviations. The transient response time is independent of the error amplifier bandwidth. This eliminates the delay associated with error amplifier and greatly improves the transient response time. The error amplifier is used here to ensure excellent DC accuracy.

Error Amplifier

The CS5141X has a transconductance error amplifier, whose non-inverting input is connected to an INTERNAL REFERENCE VOLTAGE generated from the on-chip regulator. The inverting input connects to the V_{FB} pin. The output of the error amplifier is made available at the V_C pin. A typical frequency compensation requires only a 0.1μF capacitor connected between the V_C pin and ground, as shown in the Application Circuit. This capacitor and error amplifier's output resistance (approximately 8MΩ) create a low frequency pole to limit the bandwidth. Since V²™ control does not require a high bandwidth error amplifier, the frequency compensation is greatly simplified.

The V_C pin is clamped below OUTPUT HIGH VOLTAGE. This allows the regulator to recover quickly from over current or short circuit conditions.

Oscillator and Sync Feature (CS51411 and CS51413 only)

The on-chip oscillator is trimmed at the factory and requires no external components for frequency control. The high switching frequency allows smaller external components to be used, resulting in a board area and cost savings. The tight frequency tolerance simplifies magnetic components selection. The switching frequency is reduced to 25% of the nominal value when the V_{FB} pin voltage is below FREQUENCY FOLDBACK THRESHOLD. In short circuit or over-load conditions, this reduces the power dissipation of the IC and external components.

An external clock signal can sync CS51411 / 14 to a higher frequency. The rising edge of the sync pulse turns on the power switch to start a new switching cycle, as shown in Figure 2. There is approximately 0.5μs delay between the rising edge of the sync pulse and rising edge of the V_{SW} pin voltage. The sync threshold is TTL logic compatible, and duty cycle of the sync pulses can vary from 10% to 90%. The frequency foldback feature is disabled during the sync mode.

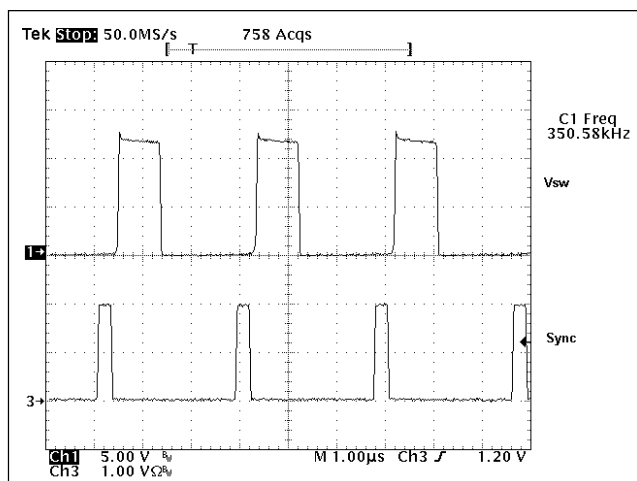


Figure 2: A CS51411 buck regulator is synced by an external 350kHz pulse signal.

Power Switch and Current Limit

The collector of the built-in NPN power switch is connected to the V_{IN} pin, and the emitter to the V_{SW} pin. When the switch turns on, the V_{SW} voltage is equal to the V_{IN} minus switch SATURATION VOLTAGE. In the buck regulator, the V_{SW} voltage swings to one diode drop below ground when the power switch turns off, and the inductor current is commutated to the catch diode. Due to the presence of high pulsed current, the traces connecting the V_{SW} pin, inductor and diode should be kept as short as possible to minimize the noise and radiation. For the same reason, the input capacitor should be placed close to the V_{IN} pin and the anode of the diode.

The saturation voltage of the power switch is dependent on the switching current, as shown in Figure 3.

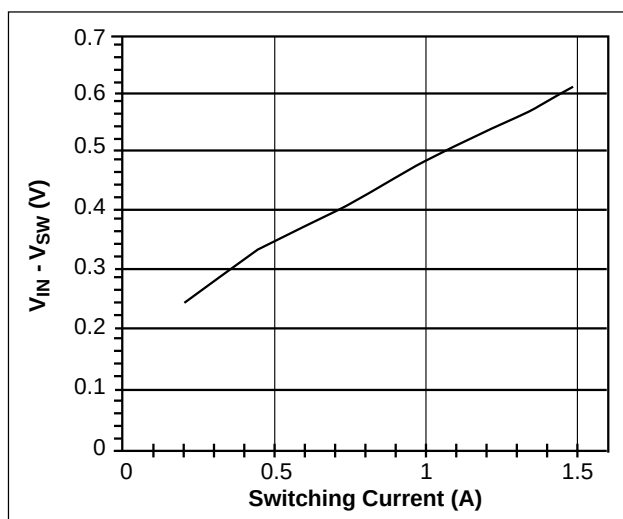


Figure 3: The saturation voltage of the power switch increases with the conducting current.

Members of the CS5141X family contain pulse-by-pulse current limiting to protect the power switch and external components. When the peak of the switching current reaches the CURRENT LIMIT, the power switch turns off after the CURRENT LIMIT DELAY. The switch will not turn on until the next switching cycle. The current limit

threshold is independent of switching duty cycle. The maximum load current, given by the following formula under continuous conduction mode, is less than the CURRENT LIMIT due to the ripple current.

$$I_{O(MAX)} = I_{LIM} - \frac{V_O (V_{IN} - V_O)}{2(L) (V_{IN}) (f_s)}$$

where f_s = switching frequency

I_{LIM} = current limit threshold

V_O = output voltage

V_{IN} = input voltage

L = inductor value

When the regulator runs under current limit, the subharmonic oscillation may cause low frequency oscillation, as shown in Figure 4. Similar to current mode control, this oscillation occurs at the duty cycle greater than 50% and can be alleviated by using a larger inductor value. The current limit threshold is reduced to FOLDBACK CURRENT when the FB pin falls below FOLDBACK THRESHOLD. This feature protects the IC and external components under the power up or over-load conditions.

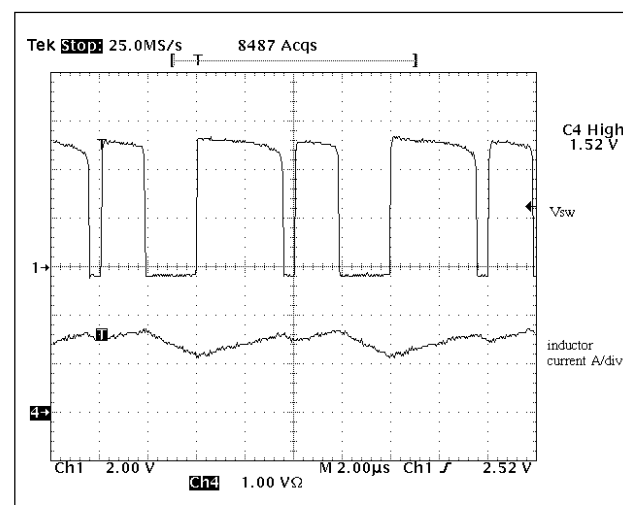


Figure 4: The regulator in current limit.

BOOST Pin

The BOOST pin provides base driving current for the power switch. A voltage higher than V_{IN} provides required headroom to turn on the power switch. This in turn reduces IC power dissipation and improves overall system efficiency. The BOOST pin can be connected to an external boost-strapping circuit which typically uses a 0.1μF capacitor and a 1N914 or 1N4148 diode, as shown in Application Diagram. When the power switch is turned on, the voltage on the BOOST pin is equal to

$$V_{BOOST} = V_{IN} + V_O - V_F$$

where V_F = diode forward voltage.

The anode of the diode can be connected to any DC voltage other than the regulated output voltage. However, the maximum voltage on the BOOST pin shall not exceed 40V.

As shown in Figure 5, the BOOST pin current includes a constant 7mA pre-driver current and base current proportional to switch conducting current. A detailed discussion of this current is conducted in Thermal Consideration section. A 0.1µF capacitor is usually adequate for maintaining the Boost pin voltage during the on time.

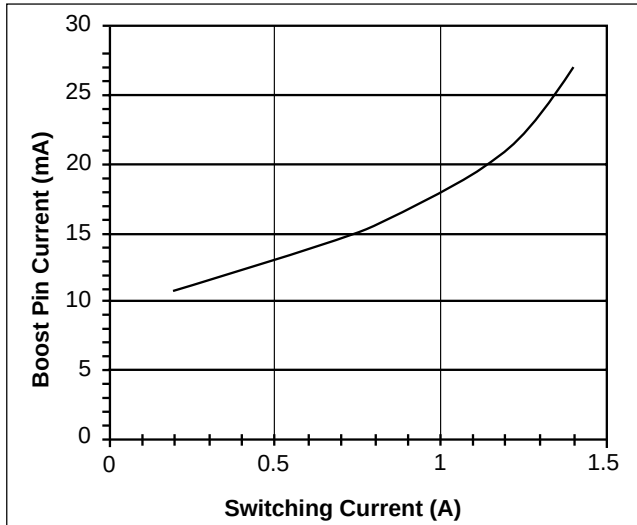


Figure 5: The boost pin current includes 7mA pre-driver current and base current when the switch is turned on. The beta decline of the power switch further increases the base current at high switching current.

BIAS Pin (CS51412 and CS51414 Only)

The BIAS pin allows a secondary power supply to bias the control circuitry of the IC. The BIAS pin voltage should be between 3.3V and 6.0V. If the BIAS pin voltage falls below that range, use a diode to prevent current drain from the BIAS pin. Powering the IC with a voltage lower than the regulator's input voltage reduces the IC power dissipation and improves energy transfer efficiency.

Shutdown

The internal power switch will not turn on until the V_{IN} pin rises above the START UP VOLTAGE. This ensures no switching until adequate supply voltage is provided to the IC.

The IC enters a sleep mode when the SHDNB pin is pulled below SHUTDOWN THRESHOLD VOLTAGE. In the sleep mode, the power switch keeps open and the supply current reduces to SHUTDOWN QUIESCENT CURRENT. This pin has internal pull-up current. So when this pin is not used, leave the SHDNB pin open.

Start-Up

During power up, the regulator tends to quickly charge up the output capacitors to reach voltage regulation. This gives rise to an excessive in-rush current which can be detrimental to the inductor, IC and catch diode. In V^{2T} control, the compensation capacitor provides soft-start with no need for extra pin or circuitry. During the power up, the OUTPUT SOURCE CURRENT of the error amplifier charges the compensation capacitor which forces V_C pin and thus output voltage ramp up gradually. The soft-start duration can be calculated by

$$T_{SS} = \frac{V_C \times C_{COMP}}{I_{SOURCE}}$$

where V_C = V_C pin steady-state voltage, which is approximately equal to error amplifier's reference voltage.

C_{COMP} = Compensation capacitor connected to the V_C pin

I_{SOURCE} = OUTPUT SOURCE CURRENT of the error amplifier.

Using a 0.1µF C_{comp} , the calculation shows a T_{SS} over 5ms which is adequate to avoid any current stresses. Figure 6 shows the gradual rise of the V_C , V_O and envelope of the V_{SW} during power up. There is no voltage over-shoot after the output voltage reaches the regulation. If the supply voltage rises slower than the V_C pin, output voltage may over-shoot.

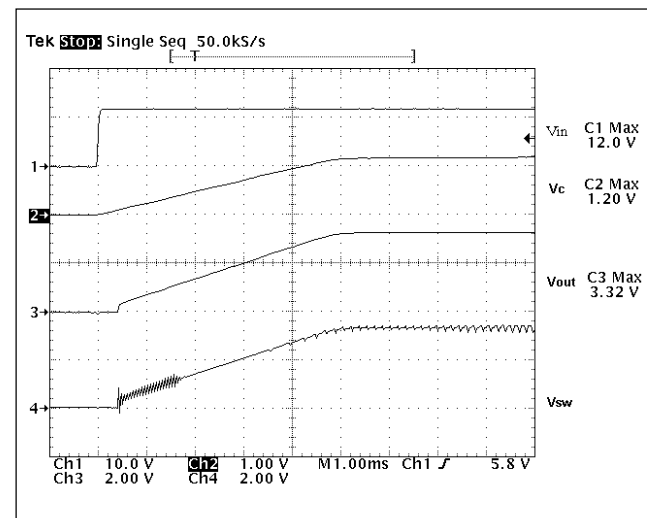


Figure 6: The power up transition of C5141X regulator.

Short Circuit

When the V_{FB} pin voltage drops below FOLDBACK THRESHOLD, the regulator reduces the peak current limit by 40% and switching frequency to 1/4 of the nominal frequency. These features are designed to protect the IC and external components during over load or short circuit conditions. In those conditions, peak switching current is clamped to the current limit threshold. The reduced switching frequency significantly increases the ripple current, and thus lowers the DC current. The short circuit can cause the minimum duty cycle to be limited by MINIMUM OUTPUT PULSE WIDTH. The foldback frequency reduces the minimum duty cycle by extending the switching cycle. This protects the IC from overheating, and also limits the power that can be transferred to the output. The current limit foldback effectively reduces the current stress on the inductor and diode. When the output is shorted, the DC current of the inductor and diode can approach the current limit threshold. Therefore, reducing the current limit by 40% can result in an equal percentage drop of the inductor and diode current. The short circuit waveforms are captured in Figure 7, and the benefit of the foldback frequency and current limit is self-evident.

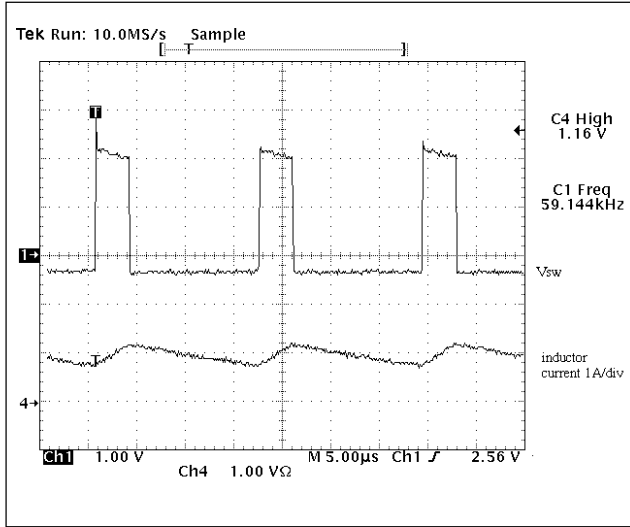


Figure 7: In short circuit, the foldback current and foldback frequency limit the switching current to protect the IC, inductor and catch diode.

Thermal Considerations

A calculation of the power dissipation of the IC is always necessary prior to the adoption of the regulator. The current drawn by the IC includes quiescent current, pre-driver current, and power switch base current. The quiescent current drives the low power circuits in the IC, which include comparators, error amplifier and other logic blocks. Therefore, this current is independent of the switching current and generates power equal to

$$W_Q = V_{IN} \times I_Q$$

where I_Q = quiescent current.

The pre-driver current is used to turn on/off the power switch and is approximately equal to 12mA in worst case. During steady state operation, the IC draws this current from the Boost pin when the power switch is on and then receives it from the V_{IN} pin when the switch is off. The pre-driver current always returns to the V_{SW} pin. Since the pre-driver current goes out to the regulator's output even when the power switch is turned off, a minimum load is required to prevent overvoltage in light load conditions. If the Boost pin voltage is equal to $V_{IN} + V_O$ when the switch is on, the power dissipation due to pre-driver current can be calculated by

$$W_{DRV} = 12mA \times (V_{IN} - V_O + \frac{V_O^2}{V_{IN}})$$

The base current of a bipolar transistor is equal to collector current divided by beta of the device. Beta of 60 is used here to estimate the base current. The Boost pin provides the base current when the transistor needs to be on. The power dissipated by the IC due to this current is

$$W_{BASE} = \frac{V_O^2}{V_{IN}} \times \frac{I_S}{60}$$

where I_S = DC switching current.

When the power switch turns on, the saturation voltage and conduction current contribute to the power loss of a non-ideal switch. The power loss can be quantified as

$$W_{SAT} = \frac{V_O}{V_{IN}} \times I_S \times V_{SAT}$$

where V_{SAT} = saturation voltage of the power switch which is shown in Figure 3.

The switching loss occurs when the switch experiences both high current and voltage during each switch transition. This regulator has a 30ns turn-off time and associated power loss is equal to

$$W_S = \frac{I_S \times V_{IN}}{2} \times 20ns \times f_S$$

The turn-on time is much shorter and thus turn-on loss is not considered here.

The total power dissipated by the IC is sum of all the above

$$W_{IC} = W_Q + W_{DRV} + W_{BASE} + W_{SAT} + W_S$$

The IC junction temperature can be calculated from the ambient temperature, IC power dissipation and thermal resistance of the package. The equation is shown as follows,

$$T_J = W_{IC} \times R_{\theta JA} + T_A$$

The maximum IC junction temperature shall not exceed 125°C to guarantee proper operation and avoid any damages to the IC.

Minimum Load Requirement

As pointed out in the previous section, a minimum load is required for this regulator due to the pre-driver current feeding the output. Placing a resistor equal to V_O divided by 12mA should prevent any voltage overshoot at light load conditions. Alternatively, the feedback resistors can be valued properly to consume 12mA current.

Component Selection

Input Capacitor

In a buck converter, the input capacitor witnesses pulsed current with an amplitude equal to the load current. This pulsed current and the ESR of the input capacitors determine the V_{IN} ripple voltage, which is shown in Figure 8. For V_{IN} ripple, low ESR is a critical requirement for the input capacitor selection. The pulsed input current possesses a significant AC component, which is absorbed by the input capacitors. The RMS current of the input capacitor can be calculated using:

$$I_{RMS} = I_O \sqrt{D(1-D)}$$

where D = switching duty cycle which is equal to V_O/V_{IN} .

I_O = load current.

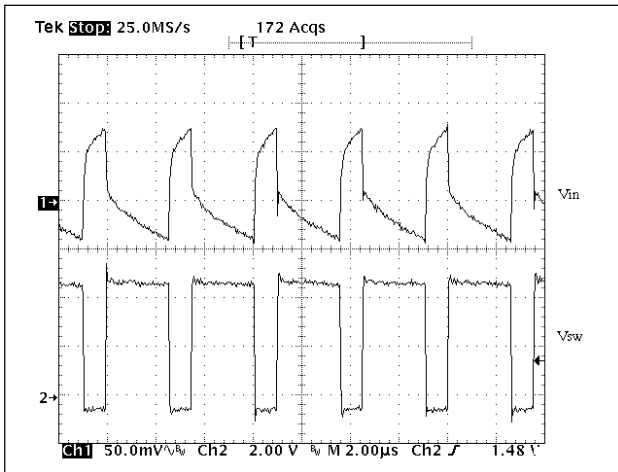


Figure 8: Input voltage ripple in a Buck converter.

To calculate the RMS current, multiply the load current with the constant given by Figure 9 at each duty cycle. It is a common practice to select the input capacitor with an RMS current rating more than half the maximum load current. If multiple capacitors are paralleled, the RMS current for each capacitor should be the total current divided by the number of capacitors.

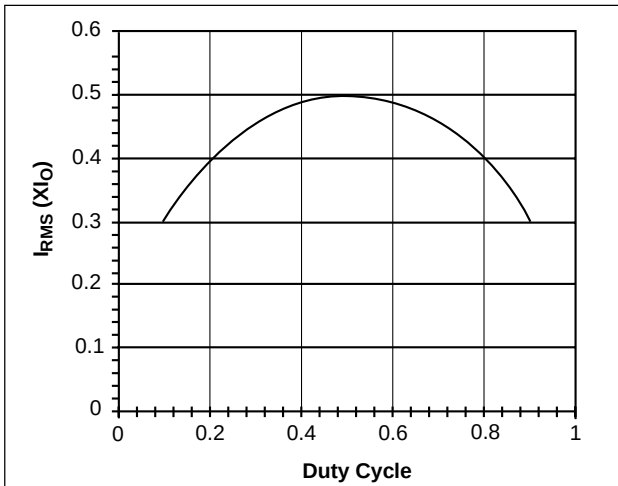


Figure 9: Input capacitor RMS current can be calculated by multiplying Y value with maximum load current at any duty cycle.

Selecting the capacitor type is determined by each design's constraint and emphasis. The aluminum electrolytic capacitors are widely available at lowest cost. Their ESR and ESL (equivalent series inductor) are relatively high. Multiple capacitors are usually paralleled to achieve lower ESR. In addition, electrolytic capacitors usually need to be paralleled with a ceramic capacitor for filtering high frequency noises. The OS-CON are solid aluminum electrolytic capacitors, and therefore has a much lower ESR. Recently, the price of the OS-CON capacitors has dropped significantly so that it is now feasibly to use them for some low cost designs. Electrolytic capacitors are physically large, and not used in applications where the size, and especially height is the major concern.

Ceramic capacitors are now available in values over 10µF. Since the ceramic capacitor has low ESR and ESL, a single ceramic capacitor can be adequate for both low frequency and high frequency noises. The disadvantage of ceramic capacitors are their high cost. Solid tantalum capacitors can have low ESR and small size. However, the reliability of the tantalum capacitor is always a concern in the application where the capacitor may experience surge current.

Output Capacitor

In a buck converter, the requirements on the output capacitor are not as critical as those on the input capacitor. The current to the output capacitor comes from the inductor and thus is triangular. In most applications, this makes the RMS ripple current not an issue in selecting output capacitors.

The output ripple voltage is the sum of a triangular wave caused by ripple current flowing through ESR, and a square wave due to ESL. Capacitive reactance is assumed to be small compared to ESR and ESL. The peak to peak ripple current of the inductor is:

$$I_{p-p} = \frac{V_O(V_{IN} - V_O)}{(V_{IN})(L)(f_s)}$$

$V_{RIPPLE(ESR)}$, the output ripple due to the ESR, is equal to the product of I_{p-p} and ESR. The voltage developed across the ESL is proportional to the di/dt of the output capacitor. It is realized that the di/dt of the output capacitor is the same as the di/dt of the inductor current. Therefore, when the switch turns on, the di/dt is equal to $(V_{IN} - V_O)/L$, and it becomes V_O/L when the switch turns off. The total ripple voltage induced by ESL can then be derived from

$$V_{RIPPLE(ESL)} = ESL\left(\frac{V_{IN}}{L}\right) + ESL\left(\frac{V_{IN} - V_O}{L}\right) = ESL\left(\frac{V_{IN}}{L}\right)$$

The total output ripple is the sum of the $V_{RIPPLE(ESR)}$ and $V_{RIPPLE(ESL)}$.

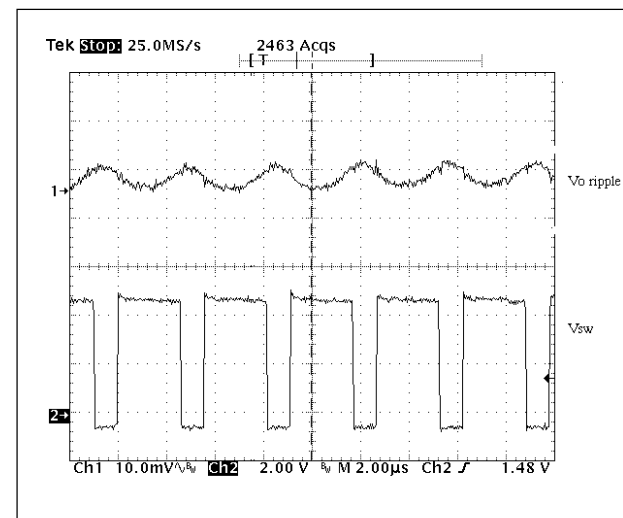


Figure 10: The output voltage ripple using two 10µF ceramic capacitors in parallel.

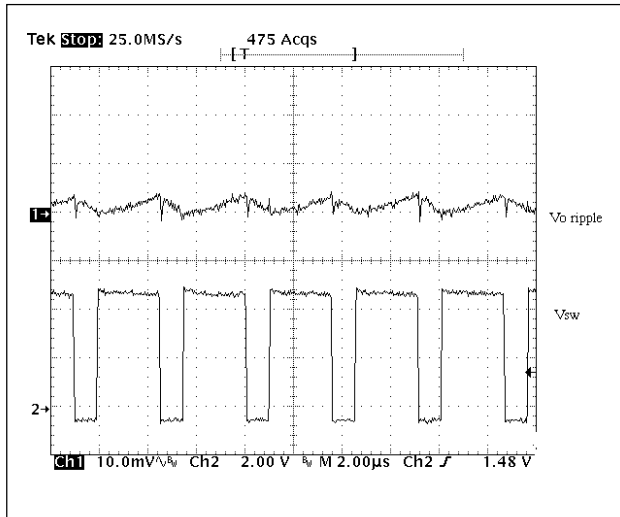


Figure 11: The output voltage ripple using one 100µF POSCAP capacitor.

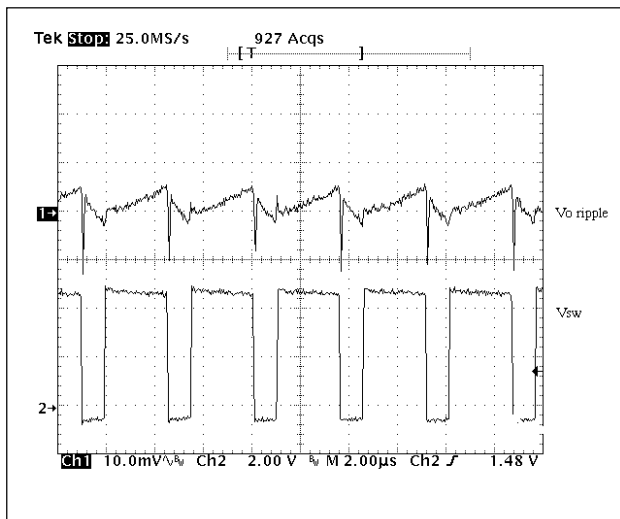


Figure 12: The output voltage ripple using one 100µF OS-CON

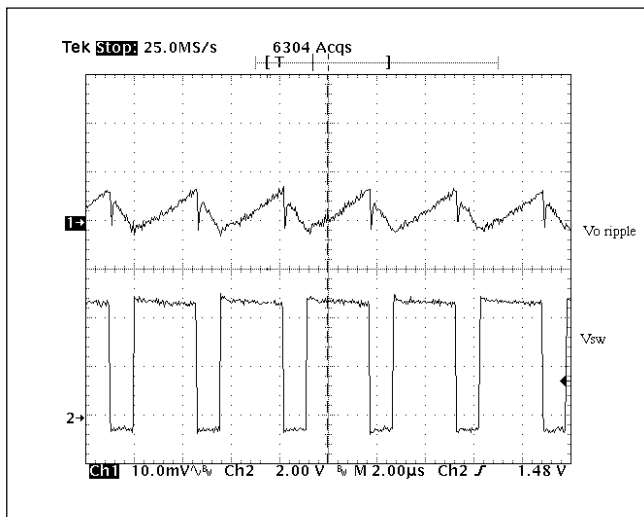


Figure 13: The output voltage ripple using one 100µF tantalum capacitor.

Figure 10 to Figure 13 show the output ripple of a 5V to 3.3V / 500mA regulator using 22µH inductor and various capacitor types. At the switching frequency, the low ESR and ESL make the ceramic capacitors still behave capacitively as shown in Figure 10. Additional paralleled ceramic capacitors will further reduce the ripple voltage, but inevitably increase the cost. “POSCAP”, manufactured by SANYO, is a solid electrolytic capacitor. The anode is sintered tantalum and the cathode is a highly conductive polymerized organic semiconductor. TPC series, featuring low ESR and low profile, is used in the measurement of Figure 11. It is shown that POSCAP presents a good balance of capacitance and ESR, compared with a ceramic capacitor. In this application, the low ESR generates less than 5mV of ripple and the ESL is almost unnoticeable. The ESL of the through-hole OS-CON capacitor give rise to the inductive impedance. It is evident from Figure 12 which shows the step rise of the output ripple on the switch turn-on and large spike on the switch turn-off. The ESL prevents the output capacitor from quickly charging up the parasitic capacitor of the inductor when the switch node is pulled below ground through the catch diode conduction. This results in the spike associated with the falling edge of the switch node. The D package tantalum capacitor used in Figure 13 has the same footprint as the POSCAP, but doubles the height. The ESR of the tantalum capacitor is apparently higher than the POSCAP. The electrolytic and tantalum capacitors provide a low-cost solution with compromised performance. The reliability of the tantalum capacitor is not a serious concern for output filtering because the output capacitor is usually free of surge current and voltage.

Diode Selection

The diode in the buck converter provides the inductor current path when the power switch turns off. The peak reverse voltage is equal to the maximum input voltage. The peak conducting current is clamped by the current limit of the IC. The average current can be calculated from:

$$I_{D(AVG)} = \frac{I_O(V_{IN} - V_O)}{V_{IN}}$$

The worse case of the diode average current occurs during maximum load current and maximum input voltage. For the diode to survive the short circuit condition, the current rating of the diode should be equal to the FOLDBACK CURRENT LIMIT. See Table 1 for schottky diodes from ON SEMICONDUCTOR which are suggested for CS5141X regulator.

Inductor Selection

When choosing inductors, one might have to consider maximum load current, core and copper losses, component height, output ripple, EMI, saturation and cost. Lower inductor values are chosen to reduce the physical size of the inductor. Higher value cuts down the ripple current, core losses and allows more output current. For most applications, the inductor value falls in the range between 2.2µH and 22µH. The saturation current ratings of the inductor shall not exceed the $I_{L(PK)}$, calculated according to

$$I_{L(PK)} = I_O + \frac{V_O(V_{IN} - V_O)}{2(f_S)(L)(V_{IN})}$$

Application Information

The DC current through the inductor is equal to the load current. The worse case occurs during maximum load current. Check the vendor's spec to adjust the inductor value under current loading. Inductors can lose over 50% of inductance when it nears saturation.

The core materials have a significant effect on inductor performance. The ferrite core has benefits of small physical size, and very low power dissipation. But be careful not to operate these inductors too far beyond their maximum ratings for peak current, as this will saturate the core.

Powered Iron cores are low cost and have a more gradual saturation curve. The cores with an open magnetic path, such as rod or barrel, tend to generate high magnetic field radiation. However, they are usually cheap and small. The cores providing a close magnetic loop, such as pot-core and toroid, generate low electro-magnetic interference (EMI).


There are many magnetic component vendors providing standard product lines suitable for CS5141X. Table 2 lists three vendors, their products and contact information.

Part Number	V _{Breakdown} (V)	I _{AVERAGE} (A)	V _(F) (V) @ I _{AVERAGE}	Package
1N5817	20	1	0.45	Axial Lead
1N5818	30	1	0.55	Axial Lead
1N5819	40	1	0.6	Axial Lead
MBR0520	20	0.5	0.385	SOD-123
MBR0530	30	0.5	0.43	SOD-123
MBR0540	40	0.5	0.53	SOD-123
MBRS120	20	1	0.55	SMB
MBRS130	30	1	0.395	SMB
MBRS140	40	1	0.6	SMB


Table 1.

Vendor	Product Family	Web Site	Telephone
Coiltronics	UNI-Pac1/2: SMT, barrel THIN-PAC: SMT, toroid, low profile CTX: Leaded, toroid	www.coiltronics.com	(516) 241-7876
Coilcraft	DO1608: SMT, barrel DS/DT 1608: SMT, barrel Magnetically shielded DO3316: SMT, barrel DS/DT 3316: SMT, barrel magnetically shielded DO3308: SMT, barrel, low profile	www.coilcraft.com	(800) 322-2645
Pulse		www.pulseeng.com	(619) 674-8100

Table 2

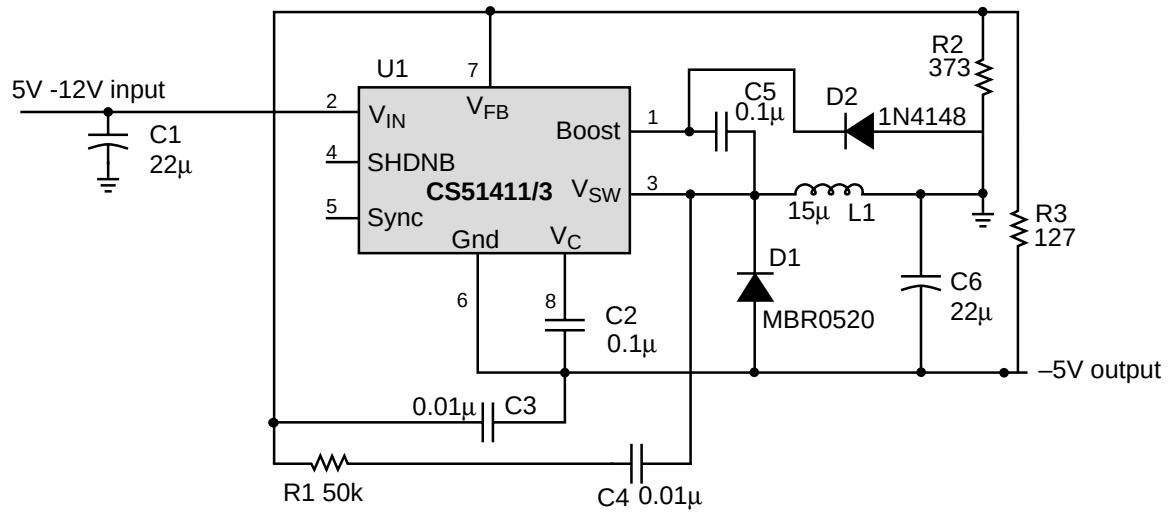

5V – 12V to –5V/400mA Inverting Converter

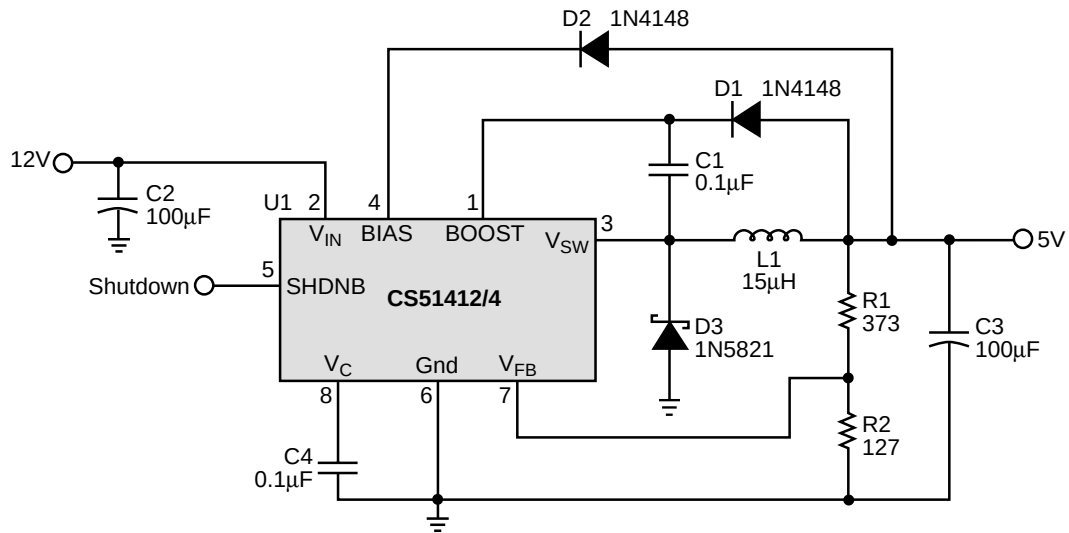

12V to 5V/1A Buck Converter using the BIAS pin.

Package Specification


PACKAGE DIMENSIONS IN mm (INCHES)

Lead Count	D			
	Metric		English	
	Max	Min	Max	Min
8L SO Narrow	5.00	4.80	.197	.189

PACKAGE THERMAL DATA

Thermal Data		8 Lead SO Narrow	
$R_{\theta JC}$	typ	45	$^{\circ}\text{C}/\text{W}$
$R_{\theta JA}$	typ	165	$^{\circ}\text{C}/\text{W}$

Surface Mount Narrow Body (D); 150 mil wide

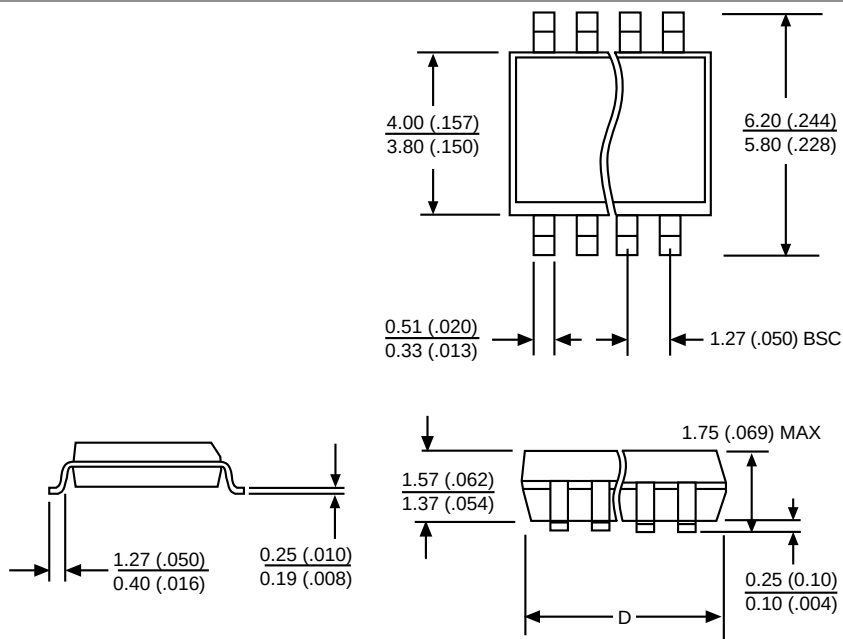

REF: JEDEC MS-012

Ordering Information

Part Number	Type	Description
CS51411ED8	$-40^{\circ} < T_A < 85^{\circ}\text{C}$	8Lead SO Narrow
CS51411EDR8	$-40^{\circ} < T_A < 85^{\circ}\text{C}$	8Lead SO Narrow (tape & reel)
CS51412ED8	$-40^{\circ} < T_A < 85^{\circ}\text{C}$	8Lead SO Narrow
CS51412EDR8	$-40^{\circ} < T_A < 85^{\circ}\text{C}$	8Lead SO Narrow (tape & reel)
CS51413ED8	$-40^{\circ} < T_A < 85^{\circ}\text{C}$	8Lead SO Narrow
CS51413EDR8	$-40^{\circ} < T_A < 85^{\circ}\text{C}$	8Lead SO Narrow (tape & reel)
CS51414ED8	$-40^{\circ} < T_A < 85^{\circ}\text{C}$	8Lead SO Narrow
CS51414EDR8	$-40^{\circ} < T_A < 85^{\circ}\text{C}$	8Lead SO Narrow (tape & reel)
CS51411GD8	$0^{\circ} < T_A < 70^{\circ}\text{C}$	8Lead SO Narrow
CS51411GDR8	$0^{\circ} < T_A < 70^{\circ}\text{C}$	8Lead SO Narrow (tape & reel)
CS51412GD8	$0^{\circ} < T_A < 70^{\circ}\text{C}$	8Lead SO Narrow
CS51412GDR8	$0^{\circ} < T_A < 70^{\circ}\text{C}$	8Lead SO Narrow (tape & reel)
CS51413GD8	$0^{\circ} < T_A < 70^{\circ}\text{C}$	8Lead SO Narrow
CS51413GDR8	$0^{\circ} < T_A < 70^{\circ}\text{C}$	8Lead SO Narrow (tape & reel)
CS51414GD8	$0^{\circ} < T_A < 70^{\circ}\text{C}$	8Lead SO Narrow
CS51414GDR8	$0^{\circ} < T_A < 70^{\circ}\text{C}$	8Lead SO Narrow (tape & reel)

ON Semiconductor and the ON Logo are trademarks of Semiconductor Components Industries, LLC (SCILLC). ON Semiconductor reserves the right to make changes without further notice to any products herein. For additional information and the latest available information, please contact your local ON Semiconductor representative.

